

# Inorganic certified reference materials

# Welcome

Spex CertiPrep has been servicing the scientific community since 1954. We have grown into the industry's most passionate and reliable manufacturer of Certified Reference Materials (CRMs) and Calibration Standards for Analytical Spectroscopy and Chromatography.

We are pleased to share with you the latest and greatest Spex CertiPrep Certified Reference Materials catalog. This flip-book style catalog includes our Inorganic Certified Reference Materials on one side and Organic Certified Reference Materials on the other.

Our primary focus is to provide Inorganic and Organic CRMs of the highest quality and superior customer support. The Inorganic Standards are manufactured for AA, ICP, ICP-MS, IC, XRF, and other analytical instrumentation. The Organic Standards are manufactured for GC, GC/MS, HPLC, LC/MS, and other analytical instrumentation.

Spex CertiPrep Group is accredited by A2LA to ISO/IEC 17025:2017 and ISO 17034:2016 and by DQS to ISO 9001:2015. Our accreditation is the most comprehensive in the industry and encompasses all of our manufactured products.

Our Inorganic product line expands as technology improves. Ninety-nine percent of stock orders ship within 24-48 hours and custom standards are manufactured and shipped within 5 business days.

We are proud to offer many new and diverse Inorganic products in this catalog, including:

- Speciation Standards
- Carbon Black
- 1 ppm ICP-MS Single Element Standards
- USP <232>, <233> & <2232> Elemental Impurities
- Certified pH Buffers
- Multi-Element Standards for the latest EPA Methods
- European Methods

Our heritage is our passion for science and dedication to the analytical community.

We appreciate your business and look forward to working with you in the years to come.

© 2022 Spex CertiPrep. All Rights Reserved. 4772A

## **OUR MISSION**

Since 1954, we have been manufacturing Inorganic Certified Reference Materials (CRMs). SPEXInorganics<sup>®</sup> continues to lead the market with the highest quality products and an offering that spreads out into many market segments worldwide. We consistently strive to design and manufacture new products to meet or exceed the requirements set by the newest instrumentation and regulatory concerns. Our team of highly trained chemists work to provide 100% customer satisfaction.





## TABLE OF CONTENTS

Ordering Information & Technical Support 3
Custom Standards Program 4
Quality
Certificate of Analysis
Spex Companies Overview

## Section 1.

## Assurance<sup>®</sup> Single-Element Standards for AA & ICP

Introduction	
Single-Element Standards	
Calibration & Matrix Blanks	
ICP Standards Kit	

## Section 2.

## **Speciation Standards**

## Section 3.

## Claritas PPT<sup>®</sup> Single-Element Standards for ICP-MS

Introduction	29
Single-Element Standards	30
Matrix Blanks	37
Isotopes	37

## Section 4.

#### Assurance® Multi-Element Standards for AA & ICP

Introduction	11
Multi-Element Standards	12

## Section 5.

Introduction	•	•	•	•	•	•	•	•	•	•	•	 	•	•	•	•	•	•	•	•	•	•	55
Multi-Element Standards.												 											56

## Section 6.

#### Multi-Element CLP Standards for ICP & ICP-MS

Introduction
Standards for the Contract Laboratory Program
Methods
CLP Standards

## Section 7.

### Heavy Metals & Minerals Testing Kits

Testing Kits																																					7	7
--------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---	---

### Section 8.

Single & Multi-Element Standards for Ion Chromatography	1
& Ion Selective Electrode Standards	

Introduction	79
Ion Chromatography & Ion Selective Electrode Standards	80

## Section 9.

## **Carbon Black Reagents**

Carbon Black Reagents for ASTM D151085	
--	--

## Section 10.

## **USP/ICH Standards**

Introduction										87
USP <232> and <233> Standards .										87
ICH/Global Compliance Standards										91

## Section 11.

## pH Buffers & Conductivity Standards

## Section 12.

## Organometallic Single & Multi-Element Oil Standards

Introduction														95	
Organometallic Oil Standards		•				•			•	•				96	

## Section 13.

## **Fusion Fluxes & Additives**

Introduction													103
Fusion Fluxes & Additives													104

## Section 14.

#### Laboratory Products & Contamination Control

Introduction	107
Pipette Washer/Dryer	108
OdorEroder <sup>®</sup>	109
MiniG <sup>®</sup>	110

## Index.

#### Inorganics

## Ordering Information & Technical Support



Phone:	+1.732.549.7144 • 1.800.LAB.SPEX (1.800.522.7739)
Fax:	+1.732.603.9647
E-mail:	spexsales@antylia.com
Online Orders and Live Chat:	www.spex.com
Ask A Chemist:	AskAChemist@antylia.com
Mailing Address:	Spex CertiPrep • 203 Norcross Avenue • Metuchen, NJ 08840

## **TERMS & CONDITIONS**

## GENERAL CONDITIONS

Payment terms are Net 30 days to rated organizations or payment can be made by credit card. Orders are shipped FCA Metuchen, New Jersey, and are shipped in accordance with IATA or DOT regulations. All freight charges are prepaid and added to the invoice unless otherwise specified on your order.

#### **RETURN AND/OR EXCHANGE**

Contact our Sales Department for a Return Authorization Number and instructions before shipping. Unauthorized returns will be refused. Transportation is the responsibility of the customer; all materials must be packed, marked, labeled, and shipped in accordance with regulations governing transportation of hazardous materials, if applicable. Credit for returned merchandise will be issued only if goods are unopened, resalable and received within 30 days of the original invoice date. Returned items are subject to a 25% restocking fee.

#### LIMITED LIABILITY

Purchaser's sole and exclusive remedy for damages and seller's sole and exclusive liability for damages for any cause whatsoever, including alleged negligence, is limited to the refund of the purchase price of the product or replacement of the product at seller's election. In no event shall seller be liable for direct, indirect, incidental, or consequential damages, including lost profits.

## EXPORT ORDERS

Spex CertiPrep maintains authorized distributors in many countries around the world. Please visit the following web page at **spex.com/distributor** for a complete list of international distributors.

## PRECAUTIONS

Spex CertiPrep products are not for any cosmetic, drug or household applications. Our acceptance of a purchase order is with the assumption that products will be used only by qualified individuals who are trained in appropriate procedures. Customers must ensure safe storage, handling and application of all products ordered from this catalog. We assume requisitioner's to be competent, safety-conscious professionals.







Spex CertiPrep offers Custom Certified Reference Materials because we realize that no two laboratories face exactly the same samples, or precisely the same requirements. In the real world, trace element determinations are performed in the presence of one or several major constituents, varying inter-element effects, matrix effects...the list goes on and on. These issues become increasingly important as you strive for greater reproducibility and push your technique to the limit and thereby require standards made specifically for your application.

With Spex CertiPrep's Custom Certified Reference Materials (CRMs) program, you can remove some of these variables. Select custom standards in connection with all product lines, from Single-Element and Multi-Element aqueous blends to Organometallic Oil Standards. Our sales specialists will be happy to discuss your applications/instrumentation, combination of elements, concentrations, and your preferred matrices. We will then design the most compatible, stable mixture using our comprehensive supply of starting materials and certified solutions. Simply tell us what standards you need and let our highly skilled chemists determine the optimum combinations for you.

## **BENEFITS:**

- Customized for your application
- Certified by ICP, ICP-MS, LC-ICP-MS, or IC analysis
- High quality starting materials tested for impurities prior to use
- Over 60 years of experience in manufacturing custom CRMs
- Manufactured and shipped within 5 business days
- Dedicated technical support to answer your CRM and lab questions

## CUSTOMS AVAILABLE FOR:

- Assurance<sup>®</sup> Grade Standards for AA and ICP
- Claritas PPT<sup>®</sup> Grade Standards for ICP-MS
- Speciation Standards for LC-ICP-MS
- Ion Chromatography/Ion Selective Electrode Standards
- Organometallic Oil Standards
- Fusion Flux
- Consumer Safety Compliance Standards

## **OUR GUARANTEE**

We will guarantee your custom standards for one year from the date of shipment and supply your standard with a comprehensive Certificate of Analysis. For Claritas PPT<sup>®</sup> custom standards, we will include an impurity analysis on your Certificate of Analysis.

To get started, contact our technical sales team at 732.549.7144 or visit: **spex.com/CustomProduct/InorganicProduct** with the following information:

Your specific application/instrumentation

- The elements or complexes you desire
- The concentration(s) at which you require each component
- ach component The matrix which you prefer (e.g., water, dilute acid, oil, etc.)



## **Certified Reference Materials of the Highest Quality - How Can We Prove It?**

To ensure the validity of results from today's high-performance instrumentation, Spex CertiPrep has developed an extensive line of the highest quality certified reference materials. How can we prove it? The International Organization for Standardization (ISO) has established a set of guidelines designed to define common business practices, increase responsibility and ensure clarity and full disclosure in the industry. As shown below, there are three ISO quality management systems that are most relevant for reference material manufacturers - ISO 9001, ISO/IEC 17025 and ISO 17034.

Each level has its own set of internationally recognized criteria against which companies are formally measured. Each level is more difficult to achieve and fewer companies are able to meet the required criteria. Spex CertiPrep is proud to be accredited for all three. By taking the extra step of choosing to demonstrate our competence and comply with these standards, we are continuously proving that our tests and calibration results are technically competent and our products truly are of the highest quality.

## Levels of Accreditation - About Each Standard and What it Means to You

**Level 1: ISO 9001:2015 - Customer Satisfaction** (all types of organizations) Certified by UL-DQS as an ISO 9001:2015 facility for our Quality Management System

Open to all types of organizations • Written procedures • Documented complaints

**Level 2: ISO/IEC 17025:2017 - Technically Sound Products** (testing and/or calibration labs) Accredited by A2LA as an ISO/IEC 17025:2017 Certified Chemical Testing Laboratory

Specifically for organizations carrying out testing and/or calibration • Competent at quality related tests • Consistent manufacturing

**Level 3: ISO 17034:2016 - Traceable & Accurate Reference Materials** (reference material producers) Accredited by A2LA as an ISO 17034:2016 Certified Inorganic and Organic Reference Material Producer

Specifically for reference material producers • Validate methods to prove accuracy • Report uncertainty and sources of error


## **Did You Know?**

Did you know that our purchased starting materials are double tested to assure what is put in our products is of the highest quality?



## Certificate of Analysis

Every accredited manufacturer of Certified Reference Materials supplies a Certificate of Analysis (COA) with their products. ISO Guide 31 and ISO 17034 outline the information required for a Certificate of Analysis. In order to comply with the ISO standards, an accredited CRM manufacturer must supply more than a dozen informational and analytical values such as certifying bodies, material descriptions, intended use, instructions for use, homogeneity, stability, certified values and their uncertainties, and traceability. Not all certificates are alike. Spex CertiPrep has been supplying some of the most comprehensive Certificates of Analysis in the CRM industry for years. Our certificates are easy to read and have all of the information an analyst would need to use our standards. We have highlighted what you should look for in a Certificate of Analysis and why our certificate is one of the best.

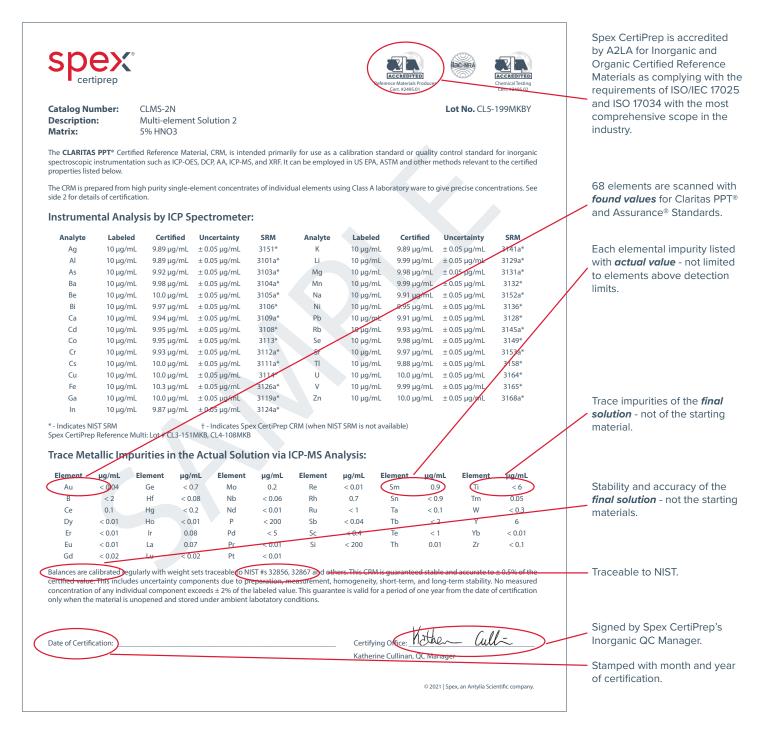

## Spex Companies Overview





Spex CertiPrep has been servicing the scientific community since 1954. We have grown into the industry's most passionate and reliable manufacturer of Certified Reference Materials (CRMs) and Calibration Standards for Analytical Spectroscopy and Chromatography.

We are pleased to share with you the latest and greatest Spex CertiPrep Certified Reference Materials catalog. This flip-book style catalog includes our Inorganic Certified Reference Materials on one side and Organic Certified Reference Materials on the other.

Our primary focus is to provide Inorganic and Organic CRMs of the highest quality and superior customer support. The Inorganic Standards are manufactured for AA, ICP, ICP-MS, IC, XRF, and other analytical instrumentation. The Organic Standards are manufactured for GC, GC/MS, HPLC, LC/MS, and other analytical instrumentation.

Spex CertiPrep Group is accredited by A2LA to ISO/IEC 17025:2017 and ISO 17034:2016 and by DQS to ISO 9001:2015. Our accreditation is the most comprehensive in the industry and encompasses all of our manufactured products.

To request product catalogs, please contact us or visit our website at **www.spex.com**.



Sample preparation is an important part of the quality control process. Spex SamplePrep's expertise and products can help analysts achieve accurate and consistent results by assuring reliable, reproducible samples.

Our sample preparation equipment products include cryogenic mills, cell lysers, pellet presses, ball mills, and automated fusion fluxers. We also provide XRF liquid cells, XRF window films and a selection of sample binders and grinding aids to simplify the sample preparation process. These products are used throughout the world in industrial, academic, research, and government laboratories. The uses cover many different fields of spectroscopy (XRF, ICP, ICP-MS, AA, IR) and their applications range from genetic research, forensics, geology, medicine, materials research, and agriculture.

We provide a Handbook of Sample Preparation and Handling that is known as a primary source of helpful advice for the preparation of samples. The topics covered in this handbook include grinding, pelletizing, fusion fluxing, and controlling contamination. Visit **www.spex.com** to learn more about our products, download the handbook or watch product demonstration videos.



# Assurance® Single-Element Standards for AA & ICP



- Made with acid and ASTM Type I Water
- Inorganic compounds and metals at 99.99& to 99.9999% purity (where commercially available)
- Directly traceable to NIST (where applicable)
- Certified by DQS to ISO 9001:2015
- Accredited by A2LA to ISO/IEC 17025:2017 and ISO 17034:2016

## AA & ICP

Assurance<sup>®</sup> Grade CRMs are designed for AA and ICP and are available in single and multi-element formulations. 70 elements are available as single-element standards and are available at 1,000 µg/mL and/or 10,000 µg/mL. They are packaged in 30 mL, 125 mL, 250 mL, and 500 mL bottles to minimize contamination. Custom standards can be manufactured upon request.

Assurance <sup>®</sup> Grade CRMs										
Designed For Use With	AA   ICP									
Analytical Range For Use	ppm, ppb									
Single-Element Standards	$\checkmark$									
10 µg/mL	√ (Hg only)									
1,000 μg/mL	$\checkmark$									
10,000 μg/mL	$\checkmark$									
Multi-Element Standards	$\checkmark$									
Custom Standards	$\checkmark$									
Certifications										
ISO 9001:2015	$\checkmark$									
ISO/IEC 17025:2017	$\checkmark$									
ISO 17034:2016	$\checkmark$									
Quality										
Traceable to NIST SRM (where applicable)	$\checkmark$									
Acid Grade	High Purity Grade									
# Trace Impurities Measured on Certificate of Analysis	68									
Trace Impurities Measured to	μg/mL									
Volume										
30 mL	$\checkmark$									
125 mL	$\checkmark$									
250 mL	$\checkmark$									
500 mL	$\checkmark$									





10,000 µg/mL

10,000 µg/mL

125 mL

500 mL

		General P	roperties
		Atomic Number	13
		Atomic Mass	26.982
		Density	2.7 g/cm <sup>3</sup>
Alumin	um	Melting Point	660 °C
		Boiling Point	2467 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLAL2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLAL2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLAL2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLAL2-2X
1,000 µg/mL	500 mL	2% HCI	PLAL1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLAL2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLAL2-3X
10,000 μg/mL	500 mL	5% HCl	PLAL1-3X

	General Properties							
	Atomic Number	33						
	Atomic Mass	74.922						
	Density	5.727 g/cm <sup>3</sup>						
Arsenic	Melting Point	817 °C						
	Boiling Point	614 °C*						

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLAS2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLAS2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLAS2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLAS2-2X
1,000 µg/mL	500 mL	2% HCI	PLAS1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLAS2-3Y
10,000 µg/mL	500 mL	5% HNO <sub>3</sub>	PLAS2-3X

	erties				
			Atomic Number	51	
S			Atomic Mass	12	1.760
			Density	6.6	i97 g/cm³
Antimo	onv		Melting Point	63	0 °C
	<b>/</b>		Boiling Point	15	87 °C
Concentration	Volume		Matrix		Part #
1,000 µg/mL	30 mL	H₂C	0/0.6% Tartaric Acid/t	r. HNO₃	PLSB7-2M
1,000 µg/mL	125 mL	H <sub>2</sub> C	0/0.6% Tartaric Acid/t	r. HNO <sub>3</sub>	PLSB7-2Y
1,000 µg/mL	250 mL	H <sub>2</sub> C	0/0.6% Tartaric Acid/t	PLSB7-2T	
1,000 μg/mL	500 mL	H <sub>2</sub> C	0/0.6% Tartaric Acid/t	PLSB7-2X	
1,000 µg/mL	500 mL		20% HCI	PLSB5-2X	

		General P	roperties
Ba		Atomic Number	56
		Atomic Mass	137.327
		Density	3.51 g/cm <sup>3</sup>
Bariu	m	Melting Point	727 °C
Danam		Boiling Point	1897 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLBA2-2M

H,O/0.6% Tartaric Acid/1% HNO,

H<sub>2</sub>O/0.6% Tartaric Acid/1% HNO

PLSB7-3Y

PLSB7-3X

1,000 µg/IIIE	JOINE	270111103	
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLBA2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLBA2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLBA2-2X
10,000 µg/mL	125 mL	5% HNO <sub>3</sub>	PLBA2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLBA2-3X

Bi		General P	roperties
		Atomic Number	83
		Atomic Mass	208.980
		Density	9.78 g/cm <sup>3</sup>
Bismu	th	Melting Point	271 °C
Distriction		Boiling Point	1564 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	10% HNO <sub>3</sub>	PLBI4-2M

10% HNO

10% HNO

125 mL

500 mL

	General P	roperties
	Atomic Number	4
	Atomic Mass	9.012
	Density	1.848 g/cm <sup>3</sup>
Beryllium	Melting Point	1287 °C
	Boiling Point	2471 °C

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLBE2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLBE2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLBE2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLBE2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLBE2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLBE2-3X

1,000 µg/mL

1,000 µg/mL

\* Sublimation Point.

PLBI4-2Y

PLBI4-2X



		General P	roperties
	)	Atomic Number	5
		Atomic Mass	10.811
		Density	2.46 g/cm <sup>3</sup>
Boro	n	Melting Point	2075 °C
boron		Boiling Point	4000 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O	PLB9-2M
1,000 μg/mL 1,000 μg/mL	30 mL 125 mL	H <sub>2</sub> O H <sub>2</sub> O	PLB9-2M PLB9-2Y
		2	
1,000 μg/mL	125 mL	H <sub>2</sub> O	PLB9-2Y
1,000 μg/mL 1,000 μg/mL	125 mL 250 mL	H <sub>2</sub> O H <sub>2</sub> O	PLB9-2Y PLB9-2T

	General P	roperties
	Atomic Number	20
	Atomic Mass	40.078
	Density	1.55 g/cm <sup>3</sup>
Calcium	Melting Point	842 °C
	Boiling Point	1484 °C

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLCA2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLCA2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLCA2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLCA2-2X
1,000 µg/mL	500 mL	2% HCI	PLCA1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLCA2-3Y
10,000 µg/mL	250 mL	5% HNO <sub>3</sub>	PLCA2-3T
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLCA2-3X
10,000 µg/mL	500 mL	5% HCl	PLCA1-3X

	General	Properties
Ce	Atomic Number	58
	Atomic Mass	140.116
	Density	6.689 g/cm <sup>3</sup>
Cerium	Melting Point	798 °C
	<b>Boiling Point</b>	3424 °C

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLCE2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLCE2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLCE2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLCE2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLCE2-3X

		General P	roperties
Cd		Atomic Number	48
		Atomic Mass	112.411
		Density	8.65 g/cm <sup>3</sup>
Cadmi	um	Melting Point	321 °C
Caannann		Boiling Point	767 °C
Concentration	Volume	Matrix	Part #
Concentration 1,000 µg/mL	<b>Volume</b> 30 mL	Matrix 2% HNO <sub>3</sub>	Part # PLCD2-2M
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLCD2-2M
1,000 μg/mL 1,000 μg/mL	30 mL 125 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLCD2-2M PLCD2-2Y
1,000 μg/mL 1,000 μg/mL 1,000 μg/mL	30 mL 125 mL 250 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLCD2-2M PLCD2-2Y PLCD2-2T

	General Properties	
	Atomic Number	6
	Atomic Mass	12.011
	Density	2.26 g/cm <sup>3</sup>
Carbon	Melting Point	3550 °C*
	Boiling Point	3825 °C*

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	H <sub>2</sub> O	PLC9-2M
1,000 µg/mL	125 mL	H <sub>2</sub> O	PLC9-2Y
1,000 µg/mL	500 mL	H <sub>2</sub> O	PLC9-2X

\* Numbers provided are for graphite. Carbon sublimates at -78.5°C.

Atomic Number

**General Properties** 

55

Cesiu	<b>5</b> m	Atomic Mass Density Melting Point Boiling Point	132.905 1.879 g/cm³ 28 ℃ 671 ℃
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLCS2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLCS2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLCS2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLCS2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLCS2-3X



Cu

Copper

# Single-Element Standards for AA & ICP

		General P	roperties
		Atomic Number	24
Cr		Atomic Mass	51.996
		Density	7.14 g/cm <sup>3</sup>
Chromi	ium	Melting Point	1907 °C
		Boiling Point	2671 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLCR2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLCR2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLCR2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLCR2-2X
1,000 μg/mL	500 mL	2% HCl	PLCR1-2X
1,000 µg/mL	500 mL	H <sub>2</sub> O	PLCR9-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLCR2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLCR2-3X
10,000 μg/mL	500 mL	H <sub>2</sub> O	PLCR9-3X

**General Properties** 

29 63.546

8.92 g/cm<sup>3</sup>

1084 °C

Atomic Number

Atomic Mass

**Melting Point** 

Density

		General P	roperties
		Atomic Number	27
			58.933
		Density	8.9 g/cm <sup>3</sup>
Coba	lt	Melting Point	1495 °C
		Boiling Point	2927 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLCO2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLCO2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLCO2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLCO2-2X
1,000 μg/mL	500 mL	2% HCl	PLCO1-2X
10,000 μg/mL	125 mL	5% HNO₃	PLCO2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLCO2-3X

		General Properties	
		Atomic Number	66
	Dy		162.5
			8.551 g/cm <sup>3</sup>
Dyspros	ium	Melting Point	1412 °C
		Boiling Point	2567 °C
Concentration	Concentration Volume		Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLDY2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLDY2-2Y

2% HNO<sub>3</sub>

500 mL

сорреі		Boiling Point	2562 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLCU2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLCU2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLCU2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLCU2-2X
1,000 μg/mL	500 mL	2% HCl	PLCU1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLCU2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLCU2-3X
10,000 μg/mL	500 mL	5% HCI	PLCU1-3X

		General P	roperties
		Atomic Number	68
Erbium		Atomic Mass	167.259
		Density	9.066 g/cm <sup>3</sup>
		Melting Point	1529 °C
		Boiling Point	2868 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLER2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLER2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLER2-2X

		General Properties	
Eu		Atomic Number	63
		Atomic Mass	151.964
		Density	5.244 g/cm <sup>3</sup>
Europi	Europium		822 °C
Ediopidini		Boiling Point	1529 °C
Concentration Volume		Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLEU2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLEU2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLEU2-2X

1,000 µg/mL

PLDY2-2X



**General Properties** 

		General P	roperties
Gd		Atomic Number	64
		Atomic Mass	157.25
		Density	7.9 g/cm <sup>3</sup>
Gadolin	ium	Melting Point	1312 °C
		Boiling Point	3266 °C
Concentration	Volume	Matrix	Part #
Concentration 1,000 µg/mL	Volume 30 mL	Matrix 2% HNO <sub>3</sub>	Part # PLGD2-2M
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLGD2-2M
1,000 μg/mL 1,000 μg/mL	30 mL 125 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLGD2-2M PLGD2-2Y
1,000 µg/mL 1,000 µg/mL 1,000 µg/mL	30 mL 125 mL 500 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLGD2-2M PLGD2-2Y PLGD2-2X

		General Properties	
Ga		Atomic Number	31
		Atomic Mass	69.723
		Density	5.904 g/cm <sup>3</sup>
Galliu	Gallium		30 °C
		Boiling Point	2204 °C
Concentration Volume		Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLGA2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLGA2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLGA2-2X

	General Properties	
<b>Ge</b> Germanium	Atomic Number	32
	Atomic Mass	72.63
	Density	5.323 g/cm <sup>3</sup>
	Melting Point	938 °C
	Boiling Point	2833 °C

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	H <sub>2</sub> O/0.16% F <sup>-</sup>	PLGE9-2M
1,000 µg/mL	125 mL	H <sub>2</sub> O/0.16% F <sup>-</sup>	PLGE9-2Y
1,000 µg/mL	500 mL	H <sub>2</sub> O/0.16% F <sup>-</sup>	PLGE9-2X

Hafnium		General Properties	
		Atomic Number	72
		Atomic Mass	178.49
		Density	13.31 g/cm <sup>3</sup>
		Melting Point	2233 °C
		Boiling Point	4603 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HCl	PLHF1-2M
1,000 μg/mL	125 mL	2% HCl	PLHF1-2Y
1,000 μg/mL	500 mL	2% HCl	PLHF1-2X

Au <sub>Gold</sub>		Atomic Number Atomic Mass Density Melting Point Boiling Point	79 196.967 19.3 g/cm³ 1064 ℃ 2970 ℃
Concentration	Volume	Matrix	Part #
1,000 µa/mL	30 mL	10% HCI	PLAU3-2M

LAU3-2M
LAU3-2Y
LAU3-2X

<b>Ho</b> Holmium		General Properties	
		Atomic Number	67
		Atomic Mass	164.930
		Density	8.795 g/cm <sup>3</sup>
		Melting Point	1461 °C
		Boiling Point	2720 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLHO2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLHO2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLHO2-2X

## **Interactive Periodic Table**

Be sure to check out our Interactive Periodic Table for comprehensive details and information for all elements including appearance, applications and complete property details. Visit **spex.com/KnowledgeBase/PeriodicTable**.



General Propertie		roperties	
			49
Indium		Atomic Mass	114.818
		Density	7.31 g/cm <sup>3</sup>
		Melting Point	157 °C
			2072 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLIN2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLIN2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLIN2-2X

		General Properties	
		Atomic Number	26
	-e		55.845
		Density	7.874 g/cm <sup>3</sup>
Iron		Melting Point	1538 °C
		Boiling Point	2861 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLFE2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLFE2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLFE2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLFE2-2X
1,000 μg/mL	500 mL	2% HCl	PLFE1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLFE2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLFE2-3X
10,000 μg/mL	500 mL	5%HCI	PLFE1-3X

Ir		<b>General Properties</b>	
		Atomic Number	77
		Atomic Mass	192.217
			22.56 g/cm <sup>3</sup>
Iridium		Melting Point	2446 °C
		Boiling Point	4428 °C
Concentration Volume		Matrix	Part #
1,000 μg/mL	30 mL	10% HCl	PLIR3-2M
1,000 μg/mL	125 mL	10% HCl	PLIR3-2Y
1,000 µg/mL	500 mL	10% HCI	PLIR3-2X

La	
Lanthanum	

General Properties				
Atomic Number	57			
Atomic Mass	138.905			
Density	6.146 g/cm <sup>3</sup>			
Melting Point	920 °C			
Boiling Point	3464 °C			

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLLA2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLLA2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLLA2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLLA2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLLA2-3X

	General Properties	
	Atomic Number	3
	Atomic Mass	6.941
	Density	0.535 g/cm <sup>3</sup>
Lithium	Melting Point	181 °C
	Boiling Point	1342 °C
Concentration Volume	Matrix	Part #

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLLI2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLLI2-2Y
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLLI2-2X
1,000 µg/mL	500 mL	2% HCI	PLLI1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLLI2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLLI2-3X
10,000 μg/mL	500 mL	5% HCI	PLLI1-3X

	General Properties	
	Atomic Number	82
	Atomic Mass	207.2
	Density	11.34 g/cm <sup>3</sup>
Lead	Melting Point	327 °C
	Boiling Point	1749 °C

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLPB2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLPB2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLPB2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLPB2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLPB2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLPB2-3X



		General P	roperties
		Atomic Number	71
		Atomic Mass	174.967
	Density	9.841 g/cm <sup>3</sup>	
Lutetii	Jm	Melting Point	1663 °C
		Boiling Point	3402 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLLU2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLLU2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLLU2-2X

		General Properties	
ПЛ		Atomic Number	12
Mg		Atomic Mass	24.305
		Density	1.738 g/cm <sup>3</sup>
Magnesium		Melting Point	650 °C
		Boiling Point	1090 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLMG2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLMG2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLMG2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLMG2-2X
1,000 μg/mL	500 mL	2% HCl	PLMG1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLMG2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLMG2-3X
10,000 μg/mL	500 mL	5% HCl	PLMG1-3X

	General Properties	
	Atomic Number	25
Mn	Atomic Mass	54.938
	Density	7.47 g/cm <sup>3</sup>
Manganese	Melting Point	1247 °C
	<b>Boiling Point</b>	2061 °C
	j, out	

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLMN2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLMN2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLMN2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLMN2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLMN2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLMN2-3X

General Properties	
Atomic Number	80
Atomic Mass	200.59
Density	13.534 g/cm <sup>3</sup>
Melting Point	-39 °C
Boiling Point	356 °C
	Atomic Number Atomic Mass Density Melting Point

Volume	Matrix	Part #
125 mL	5% HNO <sub>3</sub>	PLHG2-1AY
500 mL	5% HNO <sub>3</sub>	PLHG2-1AX
125 mL	5% HNO <sub>3</sub>	PLHG2-1Y
500 mL	5% HNO <sub>3</sub>	PLHG2-1X
30 mL	10% HNO <sub>3</sub>	PLHG4-2M
125 mL	10% HNO <sub>3</sub>	PLHG4-2Y
250 mL	10% HNO <sub>3</sub>	PLHG4-2T
500 mL	10% HNO <sub>3</sub>	PLHG4-2X
125 mL	10% HNO <sub>3</sub>	PLHG4-3Y
500 mL	10% HNO <sub>3</sub>	PLHG4-3X
	500 mL 125 mL 500 mL 30 mL 125 mL 250 mL 500 mL 125 mL	125 mL         5% HNO <sub>3</sub> 500 mL         5% HNO <sub>3</sub> 125 mL         5% HNO <sub>3</sub> 500 mL         5% HNO <sub>3</sub> 500 mL         5% HNO <sub>3</sub> 30 mL         10% HNO <sub>3</sub> 125 mL         10% HNO <sub>3</sub> 250 mL         10% HNO <sub>3</sub> 500 mL         10% HNO <sub>3</sub> 125 mL         10% HNO <sub>3</sub> 125 mL         10% HNO <sub>3</sub>

## **Ask A Chemist**

Do you have a technical CRM question for our experienced chemists? We are here to help. Submit your question to **AskAChemist@antylia.com**.



10,000 µg/mL

# Single-Element Standards for AA & ICP

		General P	roperties
ПЛ		Atomic Number	42
		Atomic Mass	95.96
		Density	10.28 g/cm <sup>3</sup>
Molybde	num	Melting Point	2623 °C
- /		Boiling Point	4639 °C
Concentration	Volume	Matrix	Part #
Concentration 1,000 µg/mL	<b>Volume</b> 30 mL	Matrix H <sub>2</sub> O	Part # PLMO9-2M
1,000 μg/mL	30 mL	H <sub>2</sub> O	PLMO9-2M
1,000 μg/mL 1,000 μg/mL	30 mL 125 mL	H <sub>2</sub> O H <sub>2</sub> O	PLMO9-2M PLMO9-2Y

	<b>General Properties</b>	
	Atomic Number	28
	Atomic Mass	58.693
	Density	8.908 g/cm <sup>3</sup>
Nickel	Melting Point	1455 °C
	Boiling Point	2913 °C

 $H_2O$ 

PLMO9-3X

500 mL

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLNI2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLNI2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLNI2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLNI2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLNI2-3Y
10,000 µg/mL	500 mL	5% HNO <sub>3</sub>	PLNI2-3X

_	<b>General Properties</b>	
	Atomic Number 46	
	Atomic Mass 106.42	
	Density 12.023 g/cm <sup>3</sup>	
Palladium	Melting Point 1555 °C	
	Boiling Point 2963 °C	

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	10% HCl	PLPD3-2M
1,000 μg/mL	125 mL	10% HCl	PLPD3-2Y
1,000 μg/mL	500 mL	10% HCl	PLPD3-2X

		General Properties	
<b>Nd</b> Neodymium		Atomic Number	60
		Atomic Mass	144.242
		Density	7.01 g/cm <sup>3</sup>
		Melting Point	1024 °C
		Boiling Point	3074 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLND2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLND2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLND2-2X

_		General Properties	
Niobium		Atomic Number	41
		Atomic Mass	92.906
		Density	8.57 g/cm <sup>3</sup>
		Melting Point	2477 °C
		Boiling Point	4744 °C
Concentration	Volume	Matrix	Part #
1.000 µg/ml	30 ml	H O/0.4% HE	PLNB9-2M

1,000 μg/mL	30 mL	H <sub>2</sub> O/0.4% HF	PLNB9-2M
1,000 µg/mL	125 mL	H <sub>2</sub> O/0.4% HF	PLNB9-2Y
1,000 µg/mL	500 mL	H <sub>2</sub> O/0.4% HF	PLNB9-2X
10,000 μg/mL	125 mL	H <sub>2</sub> O/0.4% HF	PLNB9-3Y
10,000 μg/mL	500 mL	H <sub>2</sub> O/0.4% HF	PLNB9-3X

Ρ		General P	roperties
		Atomic Number	15
		Atomic Mass	30.974
■ Phosphorus		Density	1.823 g/cm <sup>3</sup>
		Melting Point	44 °C
		Boiling Point	277 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O	PLP9-2M
1,000 µg/mL	125 mL	H <sub>2</sub> O	PLP9-2Y
1,000 μg/mL	250 mL	H,O	PLP9-2T

Н,О

H,O

Н,О

500 mL

125 mL

500 mL

1,000 µg/mL

10,000 μg/mL

10,000 µg/mL

PLP9-2X

PLP9-3Y

PLP9-3X



**General Properties** 

PLRE9-2X

PLRB2-2X

		General P	roperties
Pt		Atomic Number	78
		Atomic Mass	195.064
		Density	21.09 g/cm <sup>3</sup>
		Melting Point	1768 °C
		Boiling Point	3825 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	10% HCI	PLPT3-2M
1,000 μg/mL	125 mL	10% HCI	PLPT3-2Y
1,000 μg/mL	500 mL	10% HCl	PLPT3-2X

		General P	roperties
K		Atomic Number	19
		Atomic Mass	39.098
		Density	0.856 g/cm <sup>3</sup>
Potassi	Potassium		63 °C
		Boiling Point	759 °C
Concentration	Volume	Matrix	Part #1,000
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLK2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLK2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLK2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLK2-2X
1,000 μg/mL	500 mL	2% HCI	PLK1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLK2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLK2-3X
10,000 μg/mL	500 mL	5% HCl	PLK1-3X

	General Properties		
Pr	Atomic Number	59	
	Atomic Mass	140.908	
	Density	6.64 g/cm <sup>3</sup>	
Praseodymium	Melting Point	935 °C	
	Boiling Point	3520 °C	

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLPR2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLPR2-2Y
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLPR2-2X

**General Properties** 

<b>Re</b> Rhenium		Atomic Number Atomic Mass Density Melting Point Boiling Point	75 186.207 21.02 g/cm³ 3186 ℃ 5596 ℃
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O	PLRE9-2M
1,000 μg/mL	125 mL	H,O	PLRE9-2Y

 $H_2O$ 

2% HNO,

500 mL

500 mL

Dh		General P	roperties
		Atomic Number	37
	<b>KD</b> Rubidium		85.467
			1.532 g/cm <sup>3</sup>
Rubidiu			39 °C
		Boiling Point	688 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLRB2-2M
1,000 μg/mL	125 mL	2% HNO	PLRB2-2Y

<b>Rh</b> Rhodium		Atomic Number Atomic Mass Density Melting Point Boiling Point	45 102.905 12.45 g/cm³ 1964 ℃ 3695 ℃
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	10% HCI	PLRH3-2M
1,000 μg/mL	125 mL	10% HCI	PLRH3-2Y
1,000 μg/mL	500 mL	10% HCI	PLRH3-2X

1,000 µg/mL

1,000 µg/mL



		roperties
		44
	Atomic Mass	101.07
	Density	12.37 g/cm <sup>3</sup>
ium	Melting Point	2334 °C
	Boiling Point	4150 °C
Volume	Matrix	Part #
30 mL	10% HCI	PLRU3-2M
125 mL	10% HCl	PLRU3-2Y
500 mL	10% HCl	PLRU3-2X
	<b>Volume</b> 30 mL 125 mL	Volume     Matrix       30 mL     10% HCl       125 mL     10% HCl

	General P	roperties
	Atomic Number	21
	Atomic Mass	44.956
	Density	2.985 g/cm <sup>3</sup>
Scandium	Melting Point	1541 °C
	Boiling Point	2836 °C

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLSC2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLSC2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLSC2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLSC2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLSC2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLSC2-3X

		General P	roperties
		Atomic Number	14
S		Atomic Mass	28.085
		Density	2.33 g/cm <sup>3</sup>
Silico	Silicon		1414 °C
0		Boiling Point	3265 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	H <sub>2</sub> O/0.4% F <sup>-</sup>	PLSI9-2M
1,000 μg/mL	125 mL	H <sub>2</sub> O/0.4% F <sup>-</sup>	PLSI9-2Y
1,000 µg/mL	250 mL	H <sub>2</sub> O/0.4% F <sup>-</sup>	PLSI9-2T
1,000 µg/mL	500 mL	H <sub>2</sub> O/0.4% F <sup>-</sup>	PLSI9-2X
1,000 µg/mL	500 mL	H <sub>2</sub> O	PLSI9A-2X
10,000 μg/mL	125 mL	H <sub>2</sub> O/4% F <sup>-</sup>	PLSI9-3Y
10,000 μg/mL	500 mL	H <sub>2</sub> O/4% F <sup>-</sup>	PLSI9-3X
10,000 μg/mL	500 mL	H <sub>2</sub> O	PLSI9A-3X

		General P	roperties
<b>Sm</b> Samarium		Atomic Number	62
		Atomic Mass	150.36
		Density	7.353 g/cm <sup>3</sup>
		Melting Point	1072 °C
		Boiling Point	1790 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLSM2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLSM2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLSM2-2X

Se		General P	roperties
		Atomic Number	34
		Atomic Mass	78.96
Selenium		Density	4.819 g/cm <sup>3</sup>
		Melting Point	221 °C
		Boiling Point	685 °C
Concentration	Volume	Matrix	Part #
1.000 ug/ml	20 ml		

1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLSE2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLSE2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLSE2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLSE2-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLSE2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLSE2-3X

		General P	roperties
Ag		Atomic Number	47
		Atomic Mass	107.868
		Density	10.49 g/cm <sup>3</sup>
Silve	r	Melting Point	962 °C
		Boiling Point	2162 °C
Concentration	Volume	Matrix	Part #
	Volume	IVIALITA	Γαις π
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLAG2-2M
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLAG2-2M
1,000 μg/mL 1,000 μg/mL	30 mL 125 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLAG2-2M PLAG2-2Y
1,000 μg/mL 1,000 μg/mL 1,000 μg/mL	30 mL 125 mL 250 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLAG2-2M PLAG2-2Y PLAG2-2T



		General P	roperties
		Atomic Number	11
		Atomic Mass	22.989
		Density	0.968 g/cm <sup>3</sup>
Sodiu	m	Melting Point	98 °C
		Boiling Point	883 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLNA2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLNA2-2Y
1,000 µg/mL	250 mL	2% HNO <sub>3</sub>	PLNA2-2T
1,000 µg/mL	500 mL	2% HNO <sub>3</sub>	PLNA2-2X
1,000 µg/mL	500 mL	2% HCI	PLNA1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLNA2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLNA2-3X
10,000 μg/mL	500 mL	5% HCI	PLNA1-3X

	General Properties Atomic Number 16	
	Atomic Number	16
	Atomic Mass	32.065
	Density	1.96 g/cm <sup>3</sup>
Sulfur	Melting Point	115 °C
	Boiling Point	445 °C

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	H <sub>2</sub> O	PLS9-2M
1,000 µg/mL	125 mL	H <sub>2</sub> O	PLS9-2Y
1,000 µg/mL	250 mL	H <sub>2</sub> O	PLS9-2T
1,000 µg/mL	500 mL	H <sub>2</sub> O	PLS9-2X
10,000 μg/mL	125 mL	H <sub>2</sub> O	PLS9-3Y
10,000 μg/mL	500 mL	H <sub>2</sub> O	PLS9-3X

		General P	roperties
C		Atomic Number	38
Sr Strontium		Atomic Mass	87.62
		Density	2.63 g/cm <sup>3</sup>
		Melting Point	777 °C
		Boiling Point	1382 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLSR2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLSR2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLSR2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLSR2-2X
1,000 μg/mL	500 mL	2% HCI	PLSR1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLSR2-3Y
10,000 μg/mL	500 mL	5% HNO	PLSR2-3X

		General P	roperties
Ta		Atomic Number	73
		Atomic Mass	180.947
		Density	16.65 g/cm <sup>3</sup>
Tantal	um	Melting Point	3017 °C
		Boiling Point	5458 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O/0.8% HF	PLTA9-2M
1,000 μg/mL	125 mL	H <sub>2</sub> O/0.8% HF	PLTA9-2Y
1,000 µg/mL	500 mL	H <sub>2</sub> O/0.8% HF	PLTA9-2X

10,000 μg/mL	125 mL	H <sub>2</sub> O/0.8% HF	PLTA9-3Y
10,000 μg/mL	500 mL	H <sub>2</sub> O/0.8% HF	PLTA9-3X
		General P	roperties
1		General P Atomic Number	roperties 65
Tł	0		-

Terbiu	ım	Density Melting Point Boiling Point	8.219 g/cm³ 1356 °C 3230 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLTB2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLTB2-2Y
1.000 µg/ml	500 ml	2% HNO	PLTB2-2X

		General P	roperties
Tellurium		Atomic Number	52
		Atomic Mass	127.6
		Density	6.24 g/cm <sup>3</sup>
		Melting Point	449 °C
		Boiling Point	988 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	10% HNO <sub>3</sub>	PLTE4-2M
1,000 μg/mL	125 mL	10% HNO <sub>3</sub>	PLTE4-2Y
1,000 µg/mL 500 mL		10% HNO <sub>3</sub>	PLTE4-2X



_		General P	roperties
		Atomic Number	81
		Atomic Mass	204.383
		Density	11.85 g/cm <sup>3</sup>
Thalliu	ım	Melting Point	304 °C
		Boiling Point	1473 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLTL2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLTL2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLTL2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLTL2-2X

		General Properties	
Tm		Atomic Number	69
		Atomic Mass	168.934
		Density	9.321 g/cm <sup>3</sup>
Thulium		Melting Point	1545 °C
		Boiling Point	1950 °C
Concentration	Volume	Matrix	Part #
1.000 ug/ml	20 ml		

concentration	Volume	matrix	i ui c "
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLTM2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLTM2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLTM2-2X

Th		General Properties	
		Atomic Number	90
		Atomic Mass	232.038
Thorium		Density	11.724 g/cm <sup>3</sup>
		Melting Point	1842 °C
(Deplet	(Depleted)		4788 °C
Concentration	Volume	Matrix	Part #
Concentration 1,000 µg/mL	<b>Volume</b> 30 mL	Matrix 2% HNO <sub>3</sub>	Part # PLTH2-2M

		General P	roperties
Sn		Atomic Number	50
		Atomic Mass	118.71
		Density	7.31 g/cm <sup>3</sup>
Tin		Melting Point	232 °C
		Boiling Point	2602 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	20% HCl	PLSN5-2M
1,000 µg/mL	125 mL	20% HCI	PLSN5-2Y
1,000 µg/mL	250 mL	20% HCI	PLSN5-2T
1,000 µg/mL	500 mL	20% HCI	PLSN5-2X
1,000 µg/mL	500 mL	1% HNO <sub>3</sub> /1% HF	PLSN2-2X
10,000 μg/mL	125 mL	20% HCl	PLSN5-3Y
10,000 μg/mL	500 mL	20% HCl	PLSN5-3X
10,000 μg/mL	500 mL	2% HNO <sub>3</sub> /2% HF	PLSN2-3X

	General Properties	
	Atomic Number	74
	Atomic Mass	183.84
Tungsten	Density	19.25 g/cm <sup>3</sup>
	Melting Point	3422 °C
<b>J</b>	Boiling Point	5555 °C

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O	PLW9-2M
1,000 μg/mL	125 mL	H <sub>2</sub> O	PLW9-2Y
1,000 μg/mL	500 mL	H <sub>2</sub> O	PLW9-2X
1,000 μg/mL	500 mL	1% HNO <sub>3</sub> /2% HF	PLW2-2X
10,000 μg/mL	125 mL	H <sub>2</sub> O	PLW9-3Y
10,000 μg/mL	500 mL	H <sub>2</sub> O	PLW9-3X
10,000 μg/mL	500 mL	2% HNO <sub>3</sub> /5% HF	PLW2-3X

	General P	roperties
	Atomic Number	22
	Atomic Mass	47.857
	Density	4.507 g/cm <sup>3</sup>
Titanium	Melting Point	1668 °C
	Boiling Point	3287 °C
Concentration Volume	Matrix	Part #

Concentration	Volume Matrix		Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O/0.24% F <sup>-</sup>	PLTI9-2M
1,000 μg/mL	125 mL	125 mL H <sub>2</sub> O/0.24% F <sup>-</sup>	
1,000 μg/mL	250 mL	H <sub>2</sub> O/0.24% F <sup>-</sup>	PLTI9-2T
1,000 μg/mL	500 mL	H <sub>2</sub> O/0.24% F <sup>-</sup>	PLTI9-2X
1,000 μg/mL	500 mL	20% HCl	PLTI5-2X
10,000 μg/mL	125 mL	H <sub>2</sub> O/2.4% F <sup>-</sup>	PLTI9-3Y
10,000 μg/mL	500 mL	H <sub>2</sub> O/2.4% F <sup>-</sup>	PLTI9-3X
10,000 μg/mL	500 mL	40% HCI	PLTI5-3X



U		General P	roperties
		Atomic Number	92
		Atomic Mass	238.027
Uranium (Depleted)		Density	19.05 g/cm <sup>3</sup>
		Melting Point	1132 °C
		Boiling Point	4131 ℃
Concentration	Volume	Matrix	Part #
Concentration 1,000 µg/mL	<b>Volume</b> 30 mL	Matrix 2% HNO <sub>3</sub>	Part # PLU2-2M
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	PLU2-2M
1,000 μg/mL 1,000 μg/mL	30 mL 125 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLU2-2M PLU2-2Y

_		General Properties	
			70
		Atomic Mass	173.054
	Ytterbium		6.57 g/cm <sup>3</sup>
Ytterbi			824 °C
		Boiling Point	1196 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLYB2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLYB2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLYB2-2X

		General P	roperties
V		Atomic Number	23
		Atomic Mass	50.941
		Density	6.11 g/cm <sup>3</sup>
Vanadi	Vanadium <sup>Mel</sup>		1910 °C
		Boiling Point	3407 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLV2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLV2-2Y
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLV2-2X
1,000 μg/mL	500 mL	2%HCI	PLV1-2X
40.000 / 1			
10,000 μg/mL	125 mL	15% HNO <sub>3</sub>	PLV4-3Y
10,000 μg/mL 10,000 μg/mL	125 mL 500 mL	15% HNO <sub>3</sub> 15% HNO <sub>3</sub>	PLV4-3Y PLV4-3X

		General P	roperties
Y		Atomic Number	39
		Atomic Mass	88.906
		Density	4.472 g/cm <sup>3</sup>
Yttriu	Yttrium		1526 °C
		Boiling Point	3336 ℃
Concentration Volume			
Concentration	Volume	Matrix	Part #
<b>Concentration</b> 1,000 μg/mL	<b>Volume</b> 30 mL	Matrix 2% HNO <sub>3</sub>	Part # PLY2-2M
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLY2-2M
1,000 μg/mL 1,000 μg/mL	30 mL 125 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLY2-2M PLY2-2Y
1,000 μg/mL 1,000 μg/mL 1,000 μg/mL	30 mL 125 mL 250 mL	2% HNO <sub>3</sub> 2% HNO <sub>3</sub> 2% HNO <sub>3</sub>	PLY2-2M PLY2-2Y PLY2-2T

	General Properties	
Zr	Atomic Number	40
	Atomic Mass	91.224
Zirconium	Density	6.511 g/cm <sup>3</sup>
	Melting Point	1855 ℃
	Boiling Point	4409 °C

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLZR2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	PLZR2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLZR2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLZR2-2X
1,000 μg/mL	500 mL	10% HCl	PLZR3-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLZR2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLZR2-3X
10,000 μg/mL	500 mL	10% HCI	PLZR3-3X

	ALOITIIC Mass	175.054	
	Density	6.57 g/cm <sup>3</sup>	
m	Melting Point	824 °C	
	Boiling Point	1196 °C	
Volume	Matrix	Part #	C
30 mL	2% HNO <sub>3</sub>	PLYB2-2M	
125 mL	2% HNO <sub>3</sub>	PLYB2-2Y	
500 mL	2% HNO <sub>3</sub>	PLYB2-2X	
500 mL	2% HNO <sub>3</sub>	PLYB2-2X	

	General Properties	
Zn	Atomic Number	30
	Atomic Mass	65.38
Zinc	Density	7.14 g/cm <sup>3</sup>
	Melting Point	419 °C
	Boiling Point	907 °C

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	PLZN2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	PLZN2-2Y
1,000 μg/mL	250 mL	2% HNO <sub>3</sub>	PLZN2-2T
1,000 μg/mL	500 mL	2% HNO <sub>3</sub>	PLZN2-2X
1,000 μg/mL	500 mL	2% HCI	PLZN1-2X
10,000 μg/mL	125 mL	5% HNO <sub>3</sub>	PLZN2-3Y
10,000 μg/mL	500 mL	5% HNO <sub>3</sub>	PLZN2-3X
10,000 μg/mL	500 mL	5% HCI	PLZN1-3X



## **Calibration and Matrix Blanks**

May be used to dilute your multi-element standards or can be run directly as a blank to establish your base line. Do not use any acid or water as a diluent if you are not certain of its purity.

	Matrix Blanks for AA & ICP					
Element Volume Matrix Part #						
Nitric Acid Blank	500 mL	5% HNO <sub>3</sub>	PLBLK-HNO3			
Hydrochloric Acid Blank	500 mL	5% HCI	PLBLK-HCL			
DI Water Blank	500 mL	H <sub>2</sub> O	PLBLK-H2O			
DI Water Blank	1L	H <sub>2</sub> O	PLBLK-H2O-1L			
DI Water Blank	2 L	H <sub>2</sub> O	PLBLK-H2O-2L			
DI Water Blank	4 L	H <sub>2</sub> O	PLBLK-H2O-4L			

## **ICP Standards Kit**

Assurance<sup>®</sup> Grade, Set of 38 Single-Element Standards.

Assurance <sup>®</sup> Grade Standards Kit for AA & ICP				
Element	Concentration	Volume	Matrix	Part #
Ag, Al, As, Ba, Be, Ca, Cd, Co, Cr, Cu, Fe, K, Li, Mg, Mn, Na, Ni, Pb, Sc, Se, Sr, Tl, V, Y, Zn, Zr			2% HNO <sub>3</sub>	
Bi, Hg			10% HNO <sub>3</sub>	
Sn	1,000 µg/mL each	125 mL each	20% HCl	ICP-KIT-1
B, Mo, P, S, W			H <sub>2</sub> O	
Sb			H <sub>2</sub> O/0.6% Tartaric Acid/tr. HNO <sub>3</sub>	
Ti			H <sub>2</sub> O/0.24% F <sup>-</sup>	
Nb, Si			H₂O/0.4% F <sup>-</sup>	



## **Units of Measurement**



## Units of Measurement

Common Unit Prefixes								
Prefix	kilo	centi	milli	micro	nano	pico	femto	atto
Symbol	k	с	m	μ	n	р	f	а
Factor	10 <sup>3</sup>	10-2	10 <sup>-3</sup>	10 <sup>-6</sup>	10 <sup>-9</sup>	10 <sup>-12</sup>	10-15	10 <sup>-18</sup>
Equivalence	thousand	hundredth	thousandth	millionth	billionth	trillionth	quadrillionth	quintillionth

Weight to Weight Concentrations						
Name	Symbol	vmbol Equivalence				
Parts per thousand *	ppt*	g/kg	mg/g	µg/mg	ng/µg	
Parts per million	ppm	mg/kg	µg/g	ng/mg	pg/µg	
Parts per billion	ppb	µg/kg	ng/g	pg/mg	fg/µg	
Parts per trillion **	ppt**	ng/kg	pg/g	fg/mg	ag∕µg	

Concentration Conversions						
Unit	Symbol	ppt*	ррт	ppb	ppt**	
1 part per thousand *	ppt*	-	1 x 10 <sup>3</sup>	1 x 10 <sup>6</sup>	1 x 10 <sup>9</sup>	
1 part per million	ppm	1 x 10 <sup>-3</sup>	-	1 x 10 <sup>3</sup>	1 x 10 <sup>6</sup>	
1 part per billion	ppb	1 x 10 <sup>-6</sup>	1 x 10 <sup>-3</sup>	-	1 x 10 <sup>3</sup>	
1 part per trillion **	ppt**	1 x 10 <sup>-9</sup>	1 x 10 <sup>-6</sup>	1 x 10 <sup>-3</sup>	-	


\* ppt = parts per thousand \*\* ppt = parts per trillion

## **Anion to Elemental Concentration**

Weight to Volume Concentrations						
Name	Symbol Equivalence					
Parts per thousand *	ppt*	g/L	mg/mL	μg/μL	ng/nL	
Parts per million	ppm	mg/L	µg/mL	ng/μL	pg/nL	
Parts per billion	ppb	μg/L	ng/mL	pg/µL	fg/nL	
Parts per trillion **	ppt**	ng/L	pg/mL	fg/μL	ag/nL	

Temperature Scale					
Scale	Symbol	Convert To	Formula		
Celsius	°C	Fahrenheit	°F = °C x 1.8 + 32		
Celsius	°C	Kelvin	°K = °C + 273		
Fahrenheit	°F	Celsius	°C = (°F - 32) / 1.8		
Fahrenheit	°F	Kelvin	°K = (°F - 32) / 1.8 + 273		
Kelvin	°K	Celsius	°C = °K - 273		
Kelvin	°K	Fahrenheit	°F = 1.8 (°K - 273) + 32		

Helpful Hint: When calculating gravimetric factors for lon Chromatography standards, remember that:



Anion Concentration		Elemental Concentration
1,000 µg/mL Nitrate	=	226 µg/mL Nitrogen
1,000 µg/mL Nitrite	=	305 µg/mL Nitrogen
1,000 µg/mL Phosphate	=	326 µg/mL Phosphorus
1,000 µg/mL Sulfate	=	334 µg/mL Sulfur
1,000 µg/mL Nitrogen as Nitrate	=	1,000 µg/mL Nitrogen
1,000 µg/mL Nitrogen as Nitrite	=	1,000 µg/mL Nitrogen
1,000 µg/mL Phosphorus as Phosphate	=	1,000 μg/mL Phosphorus
1,000 µg/mL Sulfur as Sulfate	=	1,000 μg/mL Sulfur



# **Speciation Standards**



## **Speciation Standards**

Speciation analysis has become common in many fields, including environmental, food and pharmaceutical testing labs. To analyze species within a sample requires Certified Reference Materials (CRMs) for sample verification and method validation. Many speciation standards are available in today's market, however, most of them are not certified or analyzed with a state-of-the-art ICP, ICP-MS or LC-ICP-MS. Spex CertiPrep offers a wide variety of speciation standards, certified to the strictest ISO 17034 guidelines, and tested on our own LC-ICP-MS.

Assurance <sup>®</sup> Grade Single Speciation Standards							
Elements	Concentration	Volume	Matrix	Part #			
Arsenic +3	1,000 μg/mL	30 mL	2% HCl	SPEC-AS3M			
Arsenic +3	1,000 µg/mL	125 mL	2% HCl	SPEC-AS3			
Arsenic +5	1,000 µg/mL	30 mL	H <sub>2</sub> O	SPEC-AS5M			
Arsenic +5	1,000 µg/mL	125 mL	H <sub>2</sub> O	SPEC-AS5			
Chromium +3	1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	SPEC-CR3M			
Chromium +3	1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	SPEC-CR3			
Chromium +6	1,000 µg/mL	30 mL	H <sub>2</sub> O	SPEC-CR6M			
Chromium +6	1,000 µg/mL	125 mL	H <sub>2</sub> O	SPEC-CR6			
Selenium +4	1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	SPEC-SE4M			
Selenium +4	1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	SPEC-SE4			
Selenium +6	1,000 µg/mL	30 mL	H <sub>2</sub> O	SPEC-SE6M			
Selenium +6	1,000 µg/mL	125 mL	H <sub>2</sub> O	SPEC-SE6			



## **Example of LC-ICP-MS Certificate**







Catalog Number:SPEC-AS3Description:Arsenic +3 Speciation StandardMatrix:2% HCl

Lot No. CL5-199MKBY

The Certified Reference Material, CRM, is intended primarily for use as a quality control standard for inorganic spectroscopic instrumentation such as LC-ICP-MS. It can be employed in validating analytical methods for the determination of relevant species.

Certified Value is Traceable to:

\* - Indicates NIST SRM

+ - Indicates Spex CertiPrep CRM (when NIST SRM is not available)

The CRM is prepared gravimetrically using high purity Arsenic (III) Oxide (As2O3), Lot #08831RAS and Arsenic (V) Oxide (As2Os) Lot #10111D. The cartified value for overall Arsenic is obtained by ICP measurement. The value is As

3103a\*

Oxide (As2Os), Lot #10111D. The certified value for overall Arsenic is obtained by ICP measurement. The value is As (III) and As (V) in this speciation standard is obtained by LC-ICP-MS.


Refer to side 2 for details of measurement quantities.

## **Uncertified Properties:**

Instrumental Analysis by LC-ICP-MS Spectrometer:

Density: 0.998 g/mL @ 20 °C

[AS (III)]: 10.3  $\pm$  0.5 µg/mL [As (V)]: 10.4  $\pm$  0.5 µg/mL

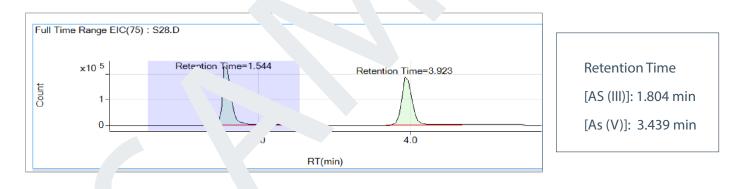

Note: The above chromatogram was obtained by analyzing a diluted standard at a concentration of 25 µg/L of each species. An injection volume of 25 µL was used. The final result of each species was determined against a calibration curve of each individual species using peak area.



# From Your Bench to Our Bench Bench Talk!

Have a question? Ask a Chemist!

Do you have a technical CRM question for our experienced chemists? We have a dedicated technical support team to answer your CRM and lab questions.

Simply e-mail us at **AskAChemist@antylia.com** and we will be happy to help you. To view previously asked questions, visit **spex.com/knowledge-base/ask-a-chemist**.





# Claritas PPT® Single-Element Standards for ICP-MS



- Made with acid and ASTM Type I Water
- Inorganic compounds and metals at 99.99% to 99.9999% purity (where commercially available)
- Directly traceable to NIST (where applicable)
- Certified by DQS to ISO 9001:2015
- Accredited by A2LA to ISO/IEC 17025:2017 and ISO 17034:2016

## **ICP-MS**

Claritas PPT<sup>®</sup> Grade CRMs are designed for ICP and ICP-MS analysis. They are available in single and multi-element solutions. The standards are at 1 µg/mL, 10 µg/mL, 100 µg/mL, or 1,000 µg/mL and packaged in 30 mL and 125 mL bottles to minimize contamination. They are made using ultra high purity acids, the highest grade starting materials and high purity water in order to minimize contaminants. Custom standards can be manufactured upon request.

Claritas PPT <sup>®</sup> Grade CRMs						
Designed For Use With	ICP   ICP-MS					
Analytical Range For Use	ppb, ppt					
Single-Element Standards	$\checkmark$					
1 μg/mL	$\checkmark$					
10 μg/mL	$\checkmark$					
100 μg/mL	$\checkmark$					
1,000 μg/mL	$\checkmark$					
Multi-Element Standards	$\checkmark$					
Custom Standards	$\checkmark$					
Certifications						
ISO 9001:2015	√					
ISO/IEC 17025:2017	$\checkmark$					
ISO 17034:2016	$\checkmark$					
Quality						
Traceable to NIST SRM (where applicable)	$\checkmark$					
Acid Grade	Ultra High Purity Grade					
# Trace Impurities Measured on Certificate of Analysis	68					
Trace Impurities Measured to	μg/L					
Volume						
30 mL	$\checkmark$					
125 mL	$\checkmark$					





	_	General P	roperties
A		Atomic Number	13
		Atomic Mass	26.982
		Density	2.7 g/cm <sup>3</sup>
Aluminum		Melting Point	660 °C
		Boiling Point	2467 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLAL2-1BY
1,000 μg/mL 30 mL		2% HNO <sub>3</sub>	CLAL2-2M
1,000 μg/mL 125 mL		2% HNO <sub>3</sub>	CLAL2-2Y

_			General P	rope	erties
			Atomic Number	51	
SD			Atomic Mass	12	1.760
			Density	6.6	97 g/cm³
Antimony			Melting Point	63	O°C
	,		Boiling Point	15	87 °C
Concentration	Volume		Matrix		Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O/0.6% Tartaric Acid/tr. HNO <sub>3</sub>		CLSB7-2M	
1,000 μg/mL	125 mL	H <sub>2</sub> O/0.6% Tartaric Acid/tr. HNO <sub>2</sub>			CLSB7-2Y

		General P	roperties
Ba		Atomic Number	56
		Atomic Mass	137.327
		Density	3.51 g/cm <sup>3</sup>
Bariu	Barium		727 ℃
Barra		Boiling Point	1897 ℃
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLBA2-2M
1,000 μg/mL 125 mL		2% HNO <sub>3</sub>	CLBA2-2Y

	General Properties		
	Atomic Number	33	
AS	Atomic Mass	74.922	
	Density	5.727 g/cm <sup>3</sup>	
Arsenic	Melting Point	817 °C	
	Boiling Point	614 °C*	

Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLAS2-1BY
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLAS2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	CLAS2-2Y

\* Sublimation Point.

CLBE2-2Y

		General P	roperties
Be		Atomic Number	4
		Atomic Mass	9.012
		Density	1.848 g/cm <sup>3</sup>
Bervlli	Beryllium		1287 °C
		Boiling Point	2471 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLBE2-1BY
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLBE2-2M

2% HNO,

125 mL

1,000 µg/mL

		General P	roperties
Bi		Atomic Number	83
		Atomic Mass	208.980
		Density	9.78 g/cm <sup>3</sup>
Bismu	th	Melting Point	271 °C
		Boiling Point	1564 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLBI2-1BY
10 μg/mL	30 mL	2% HNO <sub>3</sub>	CLBI2-1AM
10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLBI2-1AY

E-mail: USMet-CRMSales@antylia.com • Web: www.spex.com



		General P	roperties
		Atomic Number	5
		Atomic Mass	10.811
		Density	2.46 g/cm <sup>3</sup>
Boron		Melting Point	2075 °C
		Boiling Point	4000 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	H <sub>2</sub> O	CLB9-1BY

_		General P	roperties
			48
		Atomic Mass	112.411
Cadmium		Density	8.65 g/cm <sup>3</sup>
		Melting Point	321 °C
	Cuannann		767 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLCD2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLCD2-2Y

		General P	roperties
Cr		Atomic Number	24
		Atomic Mass	51.996
		Density	7.14 g/cm <sup>3</sup>
Chromium		Melting Point	1907 °C
		Boiling Point	2671 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLCR2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	CLCR2-2Y

Cu		General P	roperties
		Atomic Number	29
		Atomic Mass	63.546
		Density	8.92 g/cm <sup>3</sup>
Сорр	Copper		1084 °C
		Boiling Point	2562 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLCU2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLCU2-2Y

		General Properties	
		Atomic Number	31
G		Atomic Mass	69.723
		Density	5.904 g/cm <sup>3</sup>
Galliu	m	Melting Point	30 °C
		Boiling Point	2204 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLGA2-1BY

		General P	roperties	
Ca		Atomic Number	20	
		Atomic Mass	40.078	
		Density	1.55 g/cm <sup>3</sup>	
Calciu	Im	Melting Point	842 °C	
Carciani		Boiling Point	1484 °C	
Concentration	Volume	Matrix	Part #	1
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLCA2-2M	
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	CLCA2-2Y	

		General P	roperties
			27
		Atomic Mass	58.933
		Density	8.9 g/cm <sup>3</sup>
Coba	Cobalt		1495 °C
			2927 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLCO2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	CLCO2-2Y

		General P	roperties
Gd		Atomic Number	64
		Atomic Mass	157.25
		Density	7.9 g/cm <sup>3</sup>
Gadolin	Gadolinium		1312 °C
			3266 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLGD2-1BY



<b>Ge</b> Germanium		General P	roperties
		Atomic Number	32
		Atomic Mass	72.63
		Density	5.323 g/cm <sup>3</sup>
		Melting Point	938 °C
		Boiling Point	2833 °C
Concentration Volume		Matrix	Part #
Concentration	volume	Matrix	rait#
10 µg/mL	30 mL	H₂O/tr. F⁻	CLGE9-1AM
10 µg/mL	125 mL	H₂O/tr. F <sup>-</sup>	CLGE9-1AY

Au <sub>Gold</sub>		General P	roperties
		Atomic Number	79
		Atomic Mass	196.967
		Density	19.3 g/cm <sup>3</sup>
		Melting Point	1064 °C
		Boiling Point	2970 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	1% HNO <sub>3</sub> /3% HCI	CLAU6-1BY
100 µg/mL	30 mL	2% HCI	CLAU1-1M
100 µg/mL	125 mL	2% HCI	CLAU1-1Y

Iridium		roperties
		77
		192.217
		22.56 g/cm <sup>3</sup>
		2446 °C
		4428 °C
Volume	Matrix	Part #
125 mL	2% HCl	CLIR1-1BY
	Volume	Boiling Point           Volume         Matrix

<b>Pb</b> Lead		General P	roperties
		Atomic Number	82
		Atomic Mass	207.2
		Density	11.34 g/cm <sup>3</sup>
		Melting Point	327 °C
		Boiling Point	1749 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLPB2-1BY

2% HNO,

2% HNO<sub>3</sub>

30 mL

125 mL

Lu Lutetium		General Properties	
		Atomic Number Atomic Mass	71 174.967
		Density	9.841 g/cm <sup>3</sup>
		Melting Point	1663 °C
		Boiling Point	3402 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLLU2-1BY

	General P	roperties
	Atomic Number	49
	Atomic Mass	114.818
	Density	7.31 g/cm <sup>3</sup>
Indium	Melting Point	157 °C
	Boiling Point	2072 °C

Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLIN2-1BY
10 μg/mL	30 mL	2% HNO <sub>3</sub>	CLIN2-1AM
10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLIN2-1AY

	General Properties
	Atomic Number 26
	Atomic Mass 55.845
	Density 7.874 g/cm <sup>3</sup>
Iron	Melting Point 1538 °C
	Boiling Point 2861 °C

Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLFE2-1BY
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLFE2-2M
1,000 μg/mL	125 mL	2% HNO3	CLFE2-2Y

Li		General P	roperties
		Atomic Number	3
		Atomic Mass	6.941
	Lithium		0.535 g/cm <sup>3</sup>
Lithiu			181 °C
Litingin		Boiling Point	1342 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLLI2-1BY

1,000 µg/mL

1,000 µg/mL

CLPB2-2M

CLPB2-2Y



		General P	roperties
Magnesium		Atomic Number	12
		Atomic Mass	24.305
		Density	1.738 g/cm <sup>3</sup>
		Melting Point	650 °C
		Boiling Point	1090 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLMG2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLMG2-2Y

		General P	roperties
Manganese		Atomic Number	25
		Atomic Mass	54.938
		Density	7.47 g/cm <sup>3</sup>
		Melting Point	1247 °C
		Boiling Point	2061 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLMN2-1BY
1,000 µg/mL	30 mL	2% HNO,	CLMN2-2M
1,000 µg/IIIL		3	-

		General Properties		
Mo		Atomic Number	42	
		Atomic Mass	95.96	
Molybdenum		Density	10.28 g/cm <sup>3</sup>	
		Melting Point	2623 °C	
		Boiling Point	4639 °C	
Concentration	Volume	Matrix	Part #	
			1	

Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	H <sub>2</sub> O	CLMO9-1BY
1,000 μg/mL	30 mL	H <sub>2</sub> O	CLMO9-2M
1,000 μg/mL	125 mL	H <sub>2</sub> O	CLMO9-2Y

Ν	•	General P Atomic Number Atomic Mass	28 58.693
Nickel		Density Melting Point Boiling Point	8.908 g/cm³ 1455 ℃ 2913 ℃
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLNI2-1BY
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLNI2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLNI2-2Y
		General P	roperties
	1	Atomic Number	78
P		Atomic Mass	195.064
		Density	21.09 g/cm <sup>3</sup>

Platinum		Melting Point Boiling Point	1768 ℃ 3825 ℃
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HCI	CLPT1-1BY

Magnesium		Atomic Mass	24.305
		Density	1.738 g/cm <sup>3</sup>
		Melting Point	650 °C
		Boiling Point	1090 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLMG2-2M
1,000 μg/mL	125 mL	2% HNO,	CLMG2-2Y
	-	3	
	-	3	

		General Pr	ope	erties
Hg Mercury		Atomic Number	80	
		Atomic Mass	20	0.59
		Density	13	.534 g/cm³
		Melting Point	-39	)°C
		Boiling Point	35	6 ℃
Concentration	Volume	Matrix		Part #
1 μg/mL	125 mL	0.7% HNO,/0.4% HCI		CLHG6-1BY

1 μg/mL	125 mL	0.7% HNO <sub>3</sub> /0.4% HCl	CLHG6-1BY
10 µg/mL	30 mL	5% HNO <sub>3</sub>	CLHG2-1AM
10 µg/mL	125 mL	5% HNO <sub>3</sub>	CLHG2-1AY
1,000 µg/mL	30 mL	10% HNO <sub>3</sub>	CLHG4-2M
1,000 µg/mL	125 mL	10% HNO <sub>3</sub>	CLHG4-2Y

		General P	roperties
Nd		Atomic Number	60
		Atomic Mass	144.242
		Density	7.01 g/cm <sup>3</sup>
Neodyn	nium	Melting Point	1024 °C
,	neodynnan		3074 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLND2-1BY

		General P	roperties
Ρ		Atomic Number	15
		Atomic Mass	30.974
Phosphorus		Density	1.823 g/cm <sup>3</sup>
		Melting Point	44 °C
		Boiling Point	277 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	H <sub>2</sub> O	CLP9-1BY



125 mL

10 µg/mL

		General P	roperties
		Atomic Number	19
		Atomic Mass	39.098
		Density	0.856 g/cm <sup>3</sup>
Potassi	Potassium		63 °C
		Boiling Point	759 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLK2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	CLK2-2Y

	General Properties		
	Atomic Number	21	
Scandium	Atomic Mass	44.956	
	Density	2.985 g/cm <sup>3</sup>	
	Melting Point	1541 °C	
	Boiling Point	2836 °C	

Concentration	Volume	Matrix	Part #
10 μg/mL	30 mL	2% HNO <sub>3</sub>	CLSC2-1AM
10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLSC2-1AY

	General Properties	
	Atomic Number	14
	Atomic Mass	28.085
Silicon	Density	2.33 g/cm <sup>3</sup>
	Melting Point	1414 °C
	Boiling Point	3265 °C

Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	H₂O/tr. F⁻	CLSI9-1BY

Na		General P	roperties
		Atomic Number	11
		Atomic Mass	22.989
		Density	0.968 g/cm <sup>3</sup>
		Melting Point	98 °C
		Boiling Point	883 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLNA2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	CLNA2-2Y

_		General Properties	
Rh		Atomic Number	45
		Atomic Mass	102.905
Rhodium		Density	12.45 g/cm <sup>3</sup>
		Melting Point	1964 °C
		Boiling Point	3695 °C
Concentration	Volume	Matrix	Part #
10 μg/mL	30 mL	2% HCI	CLRH1-1AM

2% HCl

CLRH1-1AY

	General Properties	
	Atomic Number	34
	Atomic Mass	78.96
Selenium	Density	4.819 g/cm <sup>3</sup>
	Melting Point	221 °C
	Boiling Point	685 °C
Concentration Volume	Matrix	Part #

Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLSE2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLSE2-2Y

		General P	roperties
Ag Silver		Atomic Number	47
		Atomic Mass	107.868
		Density	10.49 g/cm <sup>3</sup>
		Melting Point	962 °C
		Boiling Point	2162 °C
Concentration	Volume	Matrix	Part #

1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLAG2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLAG2-2Y

Sr		roperties
		38
		87.62
		2.63 g/cm <sup>3</sup>
		777 °C
	Boiling Point	1382 °C
Volume	Matrix	Part #
125 mL	2% HNO <sub>3</sub>	CLSR2-1BY
	Volume	Boiling Point           Volume         Matrix



		General P	roperties
<b>Tb</b> Terbium		Atomic Number	65
		Atomic Mass	158.925
		Density	8.219 g/cm <sup>3</sup>
		Melting Point	1356 °C
		Boiling Point	3230 °C
Concentration	Volume	Matrix	Part #
10 μg/mL	30 mL	2% HNO <sub>3</sub>	CLTB2-1AM
10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLTB2-1AY

	General Properties	
	Atomic Number	90
	Atomic Mass	232.038
Thorium	Density	11.724 g/cm <sup>3</sup>
	Melting Point	1842 °C
(Depleted)	Boiling Point	4788 °C

Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLTH2-1BY
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLTH2-2M
1,000 µg/mL	125 mL	2% HNO <sub>3</sub>	CLTH2-2Y

Titanium		General Properties	
		Atomic Number	22
		Atomic Mass	47.857
		Density	4.507 g/cm <sup>3</sup>
		Melting Point	1668 °C
		Boiling Point	3287 °C
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	H <sub>2</sub> O/0.24% F <sup>-</sup>	CLTI9-2M

125 mL

H<sub>2</sub>O/0.24% F<sup>-</sup>

CLTI9-2Y

Uranium (Depleted)		General Properties	
		Atomic Number	92
		Atomic Mass	238.027
		Density	19.05 g/cm <sup>3</sup>
		Melting Point	1132 °C
		Boiling Point	4131 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLU2-1BY
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLU2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLU2-2Y

		General Properties	
		Atomic Number	81
		Atomic Mass	204.383
Thallium		Density	11.85 g/cm <sup>3</sup>
		Melting Point	304 °C
		Boiling Point	1473 ℃
Concentration	Volume	Matrix	Part #
1,000 μg/mL	30 mL	2% HNO <sub>3</sub>	CLTL2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLTL2-2Y

	<b>General Properties</b>	
	Atomic Number	50
	Atomic Mass	118.71
	Density	7.31 g/cm <sup>3</sup>
Tin	Melting Point	232 °C
	Boiling Point	2602 °C
Concentration Volume	Matrix	Part #

Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	1% HNO <sub>3</sub> /1% HF	CLSN2-2M
1,000 μg/mL	125 mL	1% HNO <sub>3</sub> /1% HF	CLSN2-2Y

<b>W</b> Tungsten		<b>General Properties</b>	
		Atomic Number	74
		Atomic Mass	183.84
		Density	19.25 g/cm <sup>3</sup>
		Melting Point	3422 °C
		Boiling Point	5555 °C
Concentration	Volume	Matrix	Part #
1 μg/mL	125 mL	2% HNO <sub>3</sub> /tr. HF	CLW2-1BY

V Vanadium		General Properties	
		Atomic Number	23
		Atomic Mass	50.941
		Density	6.11 g/cm <sup>3</sup>
		Melting Point	1910 °C
		Boiling Point	3407 °C
Concentration	Volume	Matrix	Part #
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLV2-2M
1,000 μg/mL	125 mL	2% HNO <sub>3</sub>	CLV2-2Y

1,000 µg/mL



1 μg/mL

## Single-Element Standards for ICP-MS

Υ		General P	roperties	
		Atomic Number	39	
		Atomic Mass	88.906	
		Density	4.472 g/cm <sup>3</sup>	
Yttriu	Yttrium		1526 °C	
		Boiling Point	3336 °C	
Concentration	Volume	Matrix	Part #	
1 μg/mL	125 mL	2% HNO <sub>3</sub>	CLY2-1BY	
10 μg/mL	30 mL	2% HNO <sub>3</sub>	CLY2-1AM	
10 μg/mL 125 mL		2% HNO,	CLY2-1AY	

Zn		General Properties						
		Atomic Number	30					
		Atomic Mass	65.38					
		Density	7.14 g/cm <sup>3</sup>					
		Melting Point	419 °C					
		Boiling Point	907 °C					
Concentration Volume		Matrix	Part #					
1 μg/mL	1 μg/mL 125 mL		CLZN2-1BY					
1,000 µg/mL	30 mL	2% HNO <sub>3</sub>	CLZN2-2M					
1,000 µg/mL 125 mL		2% HNO, CLZN2-2						

	General P	roperties	
	Atomic Number	40	
	Atomic Mass	91.224	
	Density	6.511 g/cm <sup>3</sup>	
Zirconium	Melting Point	1855 °C	
	Boiling Point	4409 °C	
Concentration Volume	Matrix	Part #	

2% HNO,

CLZR2-1BY

125 mL

### Matrix Blanks & Isotopes for ICP-MS



	Matrix Blanks								
Description	Volume	Matrix	Part #						
Hydrochloric Acid Blank	125 mL	2% HCI	CLBLK-HCL						
Nitric Acid Blank	30 mL	2% HNO <sub>3</sub>	CLBLK-HNO3M						
Nitric Acid Blank	125 mL	2% HNO <sub>3</sub>	CLBLK-HNO3						
Nitric Acid Blank	250 mL	2% HNO <sub>3</sub>	CLBK-HNO3-250						
DI Water Blank	125 mL	H <sub>2</sub> O	CLBLK-H2O						
DI Water Blank	250 mL	H <sub>2</sub> O	CLBK-H2O-250						

	Isotopes for ICP-MS									
Elements	Concentration	Volume	Matrix	Part #						
Boron 10	10 μg/mL	125 mL	H <sub>2</sub> O	ISOT-B10						
Boron 11	10 μg/mL	125 mL	H <sub>2</sub> O	ISOT-B11						
Copper 65	10 μg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-CU65						
Lead 206	10 μg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-PB206						
Lead 207	10 μg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-PB207						
Lithium 6	100 μg/mL	30 mL	2% HNO <sub>3</sub>	ISOT-LI6M						
Lithium 6	100 μg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-LI6						
Strontium 86	10 μg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-SR86						
Zinc 68	10 μg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-ZN68						

#### **Did You Know?**

"Famed chemist Glenn Seaborg was the only person who could write his address in chemical elements. He would write Sg, Lr, Bk, Cf, Am. That's Seaborgium (Sg), named after Seaborg himself; Lawrencium (Lr), named after the Lawrence Berkeley National Laboratory; Berkelium (Bk), named after the city of Berkeley, the home of UC Berkeley; Californium (Cf), named after the state of California; Americium (Am), named after America."



#### **Single-Element Standards for ICP-MS**

- Made with acid and ASTM Type I Water
- Inorganic compounds and metals at 99.99% to 99.9999% purity (where commercially available)
- Directly traceable to NIST (where applicable)
- Certified by DQS to ISO 9001:2015
- Accredited by A2LA to ISO/IEC 17025:2017 and ISO 17034:2016

#### ICP-MS

Claritas PPT<sup>®</sup> Grade CRMs are designed for ICP and ICP-MS analysis. They are available in single and multi-element solutions. The standards are at 1  $\mu$ g/mL, 10  $\mu$ g/mL, 100  $\mu$ g/mL, or 1,000  $\mu$ g/mL and packaged in 30 mL and 125 mL bottles to minimize contamination. They are made using ultra high purity acids, the highest grade starting materials and high purity water in order to minimize contaminants. Custom standards can be manufactured upon request.

#### AA & ICP

Assurance<sup>®</sup> Grade CRMs are designed for AA and ICP and are available in single and multi-element formulations. 70 elements are available as single-element standards and are available at 1,000  $\mu$ g/mL and/or 10,000  $\mu$ g/mL. They are packaged in 30 mL, 125 mL, 250 mL, and 500 mL bottles to minimize contamination. Custom standards can be manufactured upon request.

	Claritas PPT <sup>®</sup> Grade CRMs	Assurance <sup>®</sup> Grade CRMs
Designed For Use With	ICP   ICP-MS	AA   ICP
Analytical Range For Use	ppb, ppt	ppm, ppb
Single-Element Standards	$\checkmark$	
1 μg/mL	$\checkmark$	
10 μg/mL	$\checkmark$	
100 µg/mL	$\checkmark$	
1,000 μg/mL	$\checkmark$	$\checkmark$
10,000 μg/mL		$\checkmark$
Multi-Element Standards	$\checkmark$	
Custom Standards	$\checkmark$	$\checkmark$
Certifications		
ISO 9001:2015	$\checkmark$	$\checkmark$
ISO/IEC 17025:2017	$\checkmark$	$\checkmark$
ISO 17034:2016	$\checkmark$	
Quality		
Traceable to NIST SRM (where applicable)	$\checkmark$	
Acid Grade	Ultra High Purity Grade	High Purity Grade
# Trace Impurities Measured on Certificate of Analysis	68	68
Trace Impurities Measured to	μg/L	μg/mL
Volume		
30 mL	$\checkmark$	
125 mL		
250 mL		
500 mL		



# SPEXperience<sup>m</sup>

### Creating An Awesome Customer Experience

It's not only what we do, it's how we do it. We have been manufacturing Inorganic and Organic Certified Reference Materials and Calibration Standards for the Analytical Spectroscopy and Chromatography communities since 1954. Our passion for science and dedication to the analytical community drives us to go above and beyond for you. We want to provide you with the customer experience you deserve and can rely on. We do this by making sure you are our priority in everything we do.





## Assurance® Multi-Element Standards for AA & ICP



#### Assurance<sup>®</sup> Multi-Element Standards for AA & ICP

### The section that follows contains multi-element standards with a combination of elements, concentrations and matrices, designed by Spex CertiPrep for convenience of use and stability.

Standards may be diluted in the same matrix as specified; however, caution must be exercised in the choice of the source for your diluents. Diluting the matrix may cause some standards to precipitate. Also, an impure or unknown diluent turns your standard into an unknown. We recommend using only Spex CertiPrep Matrix Blanks when diluting your standards.

- Mixed Multi-Element Calibration Standards
- Calibration and Matrix Blanks
- Instrument Check (Lab Performance) Standards
- Quality Control Standards
- Lab Fortifying Stock (LFS) Solution
- Laboratory Performance Check (LPC) Standards
- Interference Check Standards
- Environmental EPA Set
- Toxicity Characteristic Leachate Procedure (TCLP) Standard
- Drinking Water Pollutant Standards
- Groundwater and Wastewater Pollution Control Check Standards

#### **CALIBRATE WITH CONFIDENCE®**

Spex CertiPrep continues to supply the most comprehensive certificate of analysis in the industry. For example, our SPEXertificate shows actual reported values for ICP of the final solution - not reported values of the starting materials or by a calculation. It also reports the trace impurities of the final solution - not of the starting materials.

In addition, each elemental impurity is listed with actual value - not limited to the element above detection limits. We also scan 68 elements with found values for all of our products which are traceable to NIST. Many other companies have followed, but not one gives you the information you get from us!

#### **Did You Know?**

Spex CertiPrep is accredited by A2LA for Inorganic and Organic Certified Reference Materials. In addition, to being registered as an ISO 9001:2015 facility, Spex CertiPrep is accredited by A2LA as complying with the requirements of ISO/IEC 17025:2017 and ISO 17034:2016. Our scope of accreditation is the most comprehensive in the industry.





#### Assurance<sup>®</sup> Mixed Multi-Element Standards for AA & ICP

The following Calibration Standards are provided for routine instrument calibration. The concentrations and matrices have been selected for convenience of use and stability.

#### For use in US EPA Method 200.7 (Revision 4.4) and SW-846, Method 6010 (Third Edition).

Mixed Calibration Standard 1A							
Elements	Elements		ntra	ation		Matrix	
Ag		5 μg/mL 10 μg/mL 20 μg/mL 50 μg/mL 100 μg/mL		۱L			
Ва						5% HNO₃/tr. Tartaric Acid/tr. HF	
B, Cd, Cu, Mn							
Sb, Se				nL			
As, Ca				mL			
Volume		Part #	Γ	Volume		Part #	
125 mL	М	IXSTD1A-100		500 mL		MIXSTD1A-500	

Mixed Calibration Standard 1C							
Elements	Elements		tration		Matrix		
Ag		5 μς	ı/mL				
В, Ва		10 µ	g/mL		5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF		
Cd, Cu, Mn		20 µ	g/mL				
Sb, Se		50 µ	0 μg/mL				
As, Ca		100 μg/mL					
Volume		Part # Volume			Part #		
125 mL	N	MIXSTD1C-100 500 mL			MIXSTD1C-500		

Mixed Calibration Standard 2A							
Elements	Elements Concer			ration		Matrix	
Sr		10 μ	10 μg/mL				
Li		50 μ	g/mL			5% HNO3	
Mo, Na	100		0 μg/mL			570111003	
К		200 μg/mL		/mL			
Volume		Part #		Volume		Part #	
125 mL	N	1IXSTD2A-100		500 mL		MIXSTD2A-500	

Mixed Calibration Standard 3A							
Elements		Conce	Concentration Matrix		Matrix		
Ce, Co, V		20 μg/m		g/mL			
Р		100		μg/mL		5% HNO <sub>3</sub>	
Volume		Part #		Volume		Part #	
125 mL	Μ	IIXSTD3A-100		500 mL		MIXSTD3A-500	



#### Assurance® Mixed Multi-Element Standards for AA & ICP (continued)

MIXSTD4A-100 contains 1 eac	<b>Mixed Calibration Standard 4A w/Mercury</b> MIXSTD4A-100 contains 1 each of MXSTD4A-100N and PLHG2-1AY   MIXSTD4A-500 contains 1 each of MXSTD4A-500N and PLHG2-1AX						
Elements		Concentration			Matrix		
Sn		40 μ	g/mL			5% HNO₃/tr. HF	
Cr, Zn		50 μ	ug/mL				
Al, Hg*, SiO <sub>2</sub> , Ti		100 µ	00 μg/mL				
Volume		Part #		Volume		Part #	
125 mL	N	IIXSTD4A-100		500 mL		MIXSTD4A-500	

\* Mercury is supplied as a separate solution (PLGH2-1AY/X) due to incompatibility with other elements.

Mixed Calibration Standard 4A w/o Mercury									
Elements		Concentration			Concer		ration		Matrix
Sn	40 µg/mL		40 μg/mL						
Cr, Zn		50		μg/mL		5% HNO₃/tr. HF			
Al, SiO <sub>2</sub> , Ti		100	μg	/mL					
Volume		Part #		Volume		Part #			
125 mL	M	XSTD4A-100N		500 mL		MXSTD4A-500N			

Mixed Calibration Standard 5A								
Elements	Concentration				Matrix			
Ве		10	μg/	ug/mL				
Ni		20	20 μg/mL			5% HNO3		
TI	TI		50 μg/mL					
Fe, Mg, Pb		100	10 μg/mL					
Volume		Part #		Volume		Part #		
125 mL	N	/IXSTD5A-100		500 mL		MIXSTD5A-500		

Calibration Standards w/ Mercury*, 125 mL							
Set Contains Part #							
MIXSTD1A-100							
MIXSTD2A-100							
MIXSTD3A-100	MIXSTD-SETA						
MIXSTD4A-100	MIX31D-SEIA						
MIXSTD5A-100							
PLHG2-1Y							

Calibration Standards w/o Mercury, 125 mL							
Set Contains	Part #						
MIXSTD1A-100							
MIXSTD2A-100							
MIXSTD3A-100	MXSTD-SETAN						
MXSTD4A-100N							
MIXSTD5A-100							

\* Mercury is supplied as a separate solution (PLGH2-1X/Y) due to incompatibility with other elements.

Mixed Calibration Standards, 125 mL								
Set Co	Part #							
MIXSTD1-100	MIXSTD4-100							
MIXSTD2-100	MIXSTD5-100	MIXSTD-SET						
MIXSTD3-100								



#### Assurance<sup>®</sup> Mixed Multi-Element Standards for AA & ICP (continued)

Mixed Calibration Standard 1								
Elements	Elements			ration		Matrix		
Ве		50 μg/mL						
Mn	Mn			/mL				
Cd, Zn		150 μg/mL			2% HNO <sub>3</sub>			
Se		200 µg/mL						
Pb		500 j	500 μg/mL					
Volume		Part #		Volume		Part #		
125 mL	N	AIXSTD1-100		500 mL		MIXSTD1-500		

Mixed Calibration Standard 2								
Elements Concer				centration Matrix				
Ba, Co, Cu, V	Ba, Co, Cu, V 100 I			g/mL		5% HNO3		
Fe	Fe		10,000 μg/mL			570 HNO3		
Volume		Part #		Volume		Part #		
125 mL	Ν	IIXSTD2-100		500 mL		MIXSTD2-500		

Mixed Calibration Standard 3								
Elements Concer				ration		Matrix		
Mo, Si	100 μg/mL			2% HNO₃/tr. HF				
As		500 μg/mL						
Volume		Part #		Volume		Part #		
125 mL	Ν	NIXSTD3-100		500 mL		MIXSTD3-500		

Mixed Calibration Standard 4							
Elements	Concentration				Matrix		
Cr, Ni		20 µ	ıg/r	g/mL			
Al, Na	200 μg/mL			5% HNO3			
К		400 μg/mL				570 HNO3	
Ca		1,000	μg	/mL			
Volume		Part #		Volume		Part #	
125 mL	Ν	/IXSTD4-100		500 mL		MIXSTD4-500	

Mixed Calibration Standard 5							
Elements	Elements			ration		Matrix	
Ag	Ag 5			/mL			
В	В			/mL	5% HNO₃/tr. Tartaric Acid/tr. HF		
Sb, Tl	Sb, Tl		200 μg/mL			5% mo <sub>3</sub> /t. fattalic Acid/ti. m	
Mg	Mg		1,000 μg/mL				
Volume		Part #		Volume		Part #	
125 mL	Ν	AIXSTD5-100		500 mL		MIXSTD5-500	



#### Instrument Check (Lab Performance) Standards

Used to calibrate and verify wavelength accuracy and stability in sequential and simultaneous ICP units. Each CAL-MIX is designed to give the user wavelength ranges from 160 nm to 790 nm. Every ICP manufacturer has a specific group of elements at varying concentrations to determine instrument accuracy and reliability. Some have special calibration programs incorporated into their software; others give you information in their manuals. These standards are also useful as training tools for technicians or for methods development. Check your ICP manual or service guide for more information.

Instrument Check Standard 3								
Elements Conce				tration	Matrix			
As, La, Li, Mn, Mo, Na, Ni, Sc		20 μg/mL						
K, P, S	K, P, S		100 μg/mL			5% HCl		
Volume		Part #		Volume		Part #		
125 mL	(	CALMIX3-100	MIX3-100			CALMIX3-500		

Instrument Check Standard 4								
Elements		Concen	ncentration		Matrix			
Ва		1 µg	/mL					
Al, As, Cu, Mn, Na, Ni, P, Pb, Sc,	Zn	10 µg	g/mL		2% HNO <sub>3</sub>			
К		50 µg	j/mL					
Volume	Part #	ŧ	Volume		Part #			
125 mL	CALMIX4-	100	500 mL		CALMIX4-500			

Instrument Check Standard 7								
Elements	Concentration			Matrix				
Al, As, Cd, Co, Cr, Cu, Fe, K, Mg, Mn, Na, Ni, Pb, Zn 100			μg	Ig/mL		2% HNO₃		
Y	Y		600 µg/mL			27011103		
Volume		Part #		Volume		Part #		
125 mL	(	ALMIX7-100		500 mL		CALMIX7-500		

Instrument Check Standard 8							
Elements			Concentration			Matrix	
Al, As, Co, Cr, Cu, K, Na, P, Pb 50		g/mL			2% HNO <sub>3</sub>		
Volume		Part #		Volume		Part #	
125 mL	C	CALMIX8-100		500 mL		CALMIX8-500	

Instrument Check Standard 10							
Elements	Elements Concer			ration		Matrix	
Al, Ba, Cd, Cu, Mn, Zn		50		ıg/mL		2% HNO <sub>3</sub>	
К	К 500		) µg	ug/mL			
Volume	Р	Part #		Volume		Part #	
125 mL	CALM	IIX10-100		500 mL		CALMIX10-500	



#### **Quality Control Standards**

Quality Control Standards are used to check the standard curve, the procedure for inter-element correction and other spectral interferences. These standards are carried through the entire analytical operation of the method. If the determined concentration is not within  $\pm$  5% of 1 µg/mL, the laboratory performance is unacceptable. The source of the problem should be identified and corrected before continuing the analysis.

Quality Control Standard 7							
Elements	Conce	entration	Matrix				
Si	50	μg/mL					
Ag, Al, B, Ba, Na	100	μg/mL	5% HNO <sub>3</sub> /tr. F <sup>-</sup>				
К	К 1,00						
Volume	Part #	Volume	Part #				
125 mL	QC-7	500 mL	QC-7-500				

Quality Control Standard 7A							
Elements	Concentration				Matrix		
Ag 50 µg		μg/mL			5% HNO₃∕tr. HF		
Al, B, Ba, Na		100 μg/mL					
Si		500 μg/mL			570 HNO <sub>3</sub> / tl. HF		
К		1,000	0 μg/mL				
Volume		Part #		Volume		Part #	
Volume		Falt#		voidille		rait#	
125 mL		QC-7A		500 mL		QC-7A-500	

Quality Control Standard 21								
Ele	ments	Conce	entration	Matrix				
As, Be, Ca, Cd, Co, Cr, Cu, Fe, Li, Mg, Mn, Mo, Ni, Pb, Sb, Se, Sr, Ti, Tl, V, Zn		100	µg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF				
Volume	Part #	Volume	Part #	Volume	Part #			
125 mL	QC-21	250 mL	QC-21-250	500 mL	QC-21-500			

Quality Control Standard 22								
Elements		Conc	entration	Ma	Matrix			
	Ag	50	μg/mL					
As, Be, Ca, Cd, Co, Cr, Cu, Fe, Li, Mg, Mn, Mo, Ni, Pb, Sb, Se, Sr, Ti, Tl, V, Zn		100	) μg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF				
Volume	Part #	Volume	Part #	Volume	Part #			
125 mL	QC-22	250 mL	QC-22-250	500 mL	QC-22-500			

#### **Helpful Hint**

Aqua regia, or "royal water", is a mixture of 1 part nitric acid and 3 parts hydrochloric acid used to digest gold and platinum. An aqua regia solution can be prepared by using Spex CertiPrep nitric acid and hydrochloric acid blanks.



#### Quality Control Standards (continued)

Quality Control Standard 23						
Eleme	nts	Concentration	Matrix			
Ag, Al, B, Ba, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga,	In, K, Li, Mg, Mn, Na, Ni, Pb, Sr, Tl, Zn	1,000 μg/mL	10% HNO <sub>3</sub>			
	Volume	Part #	]			
	125 mL	QC-23				

Quality Control Standard 24							
Elements Concentration Matrix							
Ag, Al, B, Ba, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga	Ag, Al, B, Ba, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, In, K, Li, Mg, Mn, Na, Ni, Pb, Tl, Zn		10% HNO <sub>3</sub>				
	Volume	Part #					
	125 mL	QC-24					

Set of 2 Quality Cont	ol Standards, 125 mL	Set of 2 Quality Control Standards, 125 mL			
Set Contains	Part #	Set Contains	Part #		
QC-21	OC SETA	QC-21	OC SETP		
QC-7A	QC-SETA	QC-7	QC-SETB		

#### **Laboratory Fortifying Stock (LFS) Solutions**

Used for spiking the laboratory fortified blank and the laboratory fortified sample matrix. Two (2 mL) of the LFS solution must be added to a 100 mL aliquot of the laboratory fortified blank. This blank must be carried through the entire sample preparation procedure and analysis scheme. *Note: LFS Solution 1 does not contain Ca, K, Mg, or Na because their concentration will vary from one environmental sample to the other. Please view pages 10-21 for all single-element CRMs.* 

LFS Solution 1 w/ Mercury* (LFS-1-100 contains LFS-1-100N and PLHG2-1AY   LFS-1-500 contains LFS-1-500N and PLHG2-1AX)							
Elements		Concentration				Matrix	
Ag		2.5 μg/mL			5% HNO₃/tr. Tartaric Acid/tr. HF		
Ве		5 μg/mL					
Cd, Co, Hg*, Mo, Sn, V		10 μg/mL					
Al, As, B, Ba, Cr, Cu, Fe, Li, Mn, Ni, Pb, Sb,	Se, SiO <sub>2</sub> , Sr, Tl, Zn	25 μg/mL					
Р		50 μg/mL					
Volume	Р	art #		Volume		Part #	
125 mL	LFS	-1-100		500 mL		LFS-1-500	

\* Mercury is supplied as a separate solution (PLHG2-1AY/AX (10 µg/mL)) due to incompatibility with other elements.

LFS Solution 1 w/o Mercury							
Elements		Concentration				Matrix	
Ag		2.5 μg/mL					
Ве		5 μg/mL			5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF		
Cd, Co, Mo, Sn, V		10 μg/mL					
Al, As, B, Ba, Cr, Cu, Fe, Li, Mn, Ni, Pb, Sb, Se, SiO <sub>2</sub> , Sr, Tl, Zn		25 μg/mL					
Р		50 μg/mL		g/mL			
Volume	Р	art #	[	Volume		Part #	
125 mL	LFS	-1-100N		500 mL		LFS-1-500N	



#### Laboratory Performance Check (LPC) Standards

The Laboratory Performance Check (LPC) Standard is a solution of method analytes used to evaluate the performance of the instrument. The LPC standard is used immediately following calibration, after every tenth sample, and at the end of the sample run. The analyzed value of each analyte in the LPC solution should be within 95% to 105% of its expected value. If the analyte value is outside of the interval, reanalyze the LPC. If the analyte is again outside of the  $\pm$  5% limit, the instrument should be recalibrated and all samples following the last acceptable LPC solution should be reanalyzed.

LPC Standard w/ Mercury* LPC-1-100 contains LPC-1-100N and PLHG2-1Y   LPC-1-500 contains LPC-1-500N and PLHG2-1X						
Elem	ents	Concentration	Matrix			
Aq	]	5 μg/mL				
Al, As, B, Ba, Be, Ca, Cd, Co, Cr, Cu, Fe, Li, V, Z		20 μg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF			
Hg*, K,	P, SiO <sub>2</sub>	100 μg/mL				
Volume	Volume Part #		Part #			
125 mL	LPC-1-100	125 mL	LPC-1-500			

\* Mercury is supplied as a separate solution (PLHG2-1X/Y (10 µg/mL)) due to incompatibility with other elements.

LPC Standard w/o Mercury*									
Elem	ents	Concentration	Matrix						
A	]	5 μg/mL							
Al, As, B, Ba, Be, Ca, Cd, Co, Cr, Cu, Fe, Li, V, Z	-	20 μg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF						
К, Р,	SiO <sub>2</sub>	100 μg/mL							
Volume	Part #	Volume	Part #						
125 mL	LPC-1-100N	125 mL	LPC-1-500N						

#### **Environmental EPA Sets**

#### For use in US EPA Method 6010 and 200.7 (Revision 4.4).

Environmental EPA Set	w/ Mercury <sup>*</sup> , 125 mL <sup>**</sup>	Environmental EPA Set	: w/o Mercury, 125 mL
Set Contains	Part #	Set Contains	Part #
MIXSTD1-100		MIXSTD1-100	
MIXSTD2-100		MIXSTD2-100	
MIXSTD3-100		MIXSTD3-100	
MIXSTD4-100		MIXSTD4-100	
MIXSTD5-100		MIXSTD5-100	EPA-SETN
INTER18-100	EPA-SET	INTER18-100N	EPA-SETIN
INTER5-100		INTER5-100	
PLHG2-1Y		PLSB7-2Y	
PLSB7-2Y		PLBLK-HCL**	
PLBLK-HCL**		PLBLK-HNO3**	
PLBLK-HNO3**		-	,

\* Mercury is supplied as a separate solution (PLHG2-1X/1Y) due to incompatibility with other elements.

\*\* PLBLK-HCL and PLBLK-HNO3 are at 500 mL.



#### **Interference Check Standards**

The Interference Check Standards are used to set or confirm that the correct background correction intervals have been set for sequential ICP spectrometers and that the proper inter-element correction factors are set for simultaneous ICP spectrometers.

#### For use in US EPA Method 200.7 (Revision 4.4) and SW-846, Method 6010 (Third Edition).

Interference Check Standard 1								
Elements	Concentration				Matrix			
Sb	Sb 1,0		00 μg/mL H <sub>2</sub> O/		H <sub>2</sub>	O/tr. HNO₃/0.6% Tartaric Acid		
Volume	Р	art #		Volume		Part #		
125 mL	PL	SB7-2Y		500 mL		PLSB7-2X		

Interference Check Standard 5								
Elements			Concentration			Matrix		
Na		1,00	00	)0 μg/mL				
AI	AI			μg/mL				
Mg	Mg		3,000 μg/mL			5% HNO <sub>3</sub>		
Fe		5,000 μg/mL						
Са		6,00	6,000 μg/mL					
Volume	Р	Part #		Volume		Part #		
125 mL	INT	ER5-100		500 mL		INTER5-500		

INTER18-100 contains 1	Interference Check Standard 18 w/ Mercury* INTER18-100 contains 1 each of INTER18-100N and PLHG2-1Y   INTER18-500 contains 1 each of INTER18-500N and PLHG2-1X								
Elements			Matrix						
Be, Hg*		100	)μg/mL						
Mn	Mn		)µg/mL						
Ag, Ba, Cd, Co, Cr, Cu, Ni, V,	Ag, Ba, Cd, Co, Cr, Cu, Ni, V, Zn		)μg/mL						
Se		500	)μg/mL		5% HNO₃				
As, Pb, Tl		1,000 μg/mL							
К		20,00	)0 μg/mL						
Volume	P	art #	Volum	le	Part #				
125 mL	INTE	R18-100	500 mL		INTER18-500				

\* Mercury is supplied as a separate solution (PLHG2-1X/1Y) due to incompatibility with other elements.

Interference Check Stand	ards w/ Mercury, 125 mL	Interference Check Standards w/o Mercury, 125 m		
Set Contains	Part #	Set Contains	Part #	
PLSB7-2Y		PLSB7-2Y		
PLHG2-1Y		INTER5-100	INTER-SETN	
INTER5-100	INTER-SET	INTER18-100N		
INTER18-100		-		



#### Interference Check Standards (continued)

Interference Check Standard 18 w/o Mercury								
Elements		Conce	entration		Matrix			
Ве		100	μg/mL					
Mn		200 µg/mL			5% HNO <sub>3</sub>			
Ag, Ba, Cd, Co, Cr, Cu, Ni, V,	Zn	300	300 μg/mL					
Se		500 μg/mL						
As, Pb, Tl		1,00	0 μg/mL					
К		20,000 μg/mL						
Volume	D	art #	Volume		Part #			
volume	r	art # Volume			Falt#			
125 mL	INTE	R18-100N	500 mL		INTER18-500N			

#### **Toxicity Characteristic Leachate Performance (TCLP) Standards**

Designed to determine the mobility of the Inorganic contaminants present in liquid, solid and multi-phase wastes. To simplify, TCLP is designed to determine the hazardous contaminants that are actually entering into the environment. In addition to the Spex CertiPrep TCLP Standards, designed with all of the elements in one solution, the Toxicity Characteristic rule separates the elements according to specific instrumentation: ICP, GFAA, and Cold Vapor AA.

#### For use in accordance with the Toxicity Characteristic Rule Regulatory Levels issued in the Federal Register 55, 11846 March 1990; Method 1311.

TCLP-100 contains	1 each of TCLP-1	TCLP Standa 00N and PLHG2-1Y			.P-500N and PLHG2-1X	
Elements	Elements		ncentration	Matrix		
Cd, Se		5 μg/mL				
Ag, As, Cr, Pb	Ag, As, Cr, Pb		25 μg/mL		2% HNO <sub>3</sub>	
Hg*	Hg*		00 μg/mL			
Ва		5	500 µg/mL			
Volume	P	rt # Volun		Volume	Part #	
125 mL	TCI	LP-100 500 mL		500 mL	TCLP-500	

\* Mercury is supplied as a separate solution (PLHG2-1X/Y) due to incompatibility with other elements.

TCLP Standard w/o Mercury								
Elements	Elements Conc				Matrix			
Cd, Se		5 μ	ıg/mL					
Ag, As, Cr, Pb		25 μ	25 μg/mL		2% HNO <sub>3</sub>			
Ва		500	μg/mL					
					<b>D</b>			
Volume	P	art #	Volume		Part #			
125 mL	TCL	.P-100N	500 mL		TCLP-500N			



#### **Drinking Water Pollutant Standards**

These standards are for use with procedures for compliance monitoring of drinking water and for analysis of ground and surface water where determination of the drinking water contamination levels are required.

#### Refer to US National Primary Drinking Water Regulations 40 CFR, Part 141.

<b>Primary Drinking Water Metals w/ Mercury*</b> EP-8 contains 1 each of EP-8N and PLHG2-1AY   EP-8-500 contains 1 each of EP-8-500N and PLHG2-1AX								
Elements		Conc	Concentration		Matrix			
Cd, Se		5	5 μg/mL					
Ag, As, Cr, Hg*, Pb		10 μg/mL		2% HNO <sub>3</sub>				
Ва		100 μg/mL		nL				
Volume	Par	Part #		Volume		Part #		
125 mL	EP	EP-8		500 mL		EP-8-500		

\* Mercury is supplied as a separate solution (PLHG2-1AX/Y) due to incompatibility with other elements.

Primary Drinking Water Metals w/o Mercury								
Elements		Conc	en	tration		Matrix		
Cd, Se		5	μg	g/mL				
Ag, As, Cr, Pb		10	10 μg/mL		2% HNO <sub>3</sub>			
Ва		100	) μ	g/mL				
Valuma			Г	Valuma		Dout #		
Volume	۲	art #		Volume		Part #		
125 mL	E	P-8N	500 mL		EP-8-500N			

Secondary Drinking Water Metals								
Elements	Elements Conc			ntration		Matrix		
Mn		5	5 μg/mL		2% HNO3			
Fe		3		30 μg/mL				
Cu	1(		100 μg/mL		270111003			
Zn		500	Οµ	ıg/mL				
Volume	Р	Part #		Volume		Part #		
125 mL		EP-4		500 mL		EP-4-500		

Drinking Water Standards w/ Mercury*, 125 mL					
Set Contains Part #					
EP-8					
EP-4	DW-SET				
PLHG2-1AY					

Drinking Water Standards w/o Mercury, 125 mL				
Set Contains Part #				
EP-8N				
EP-4	DW-SETN			

\* Mercury is supplied as a separate solution (PLHG2-1AX/Y) due to incompatibility with other elements.



#### **Groundwater and Wastewater Pollution Control Check Standards**

May be used either as standards or as a means to check the individual analysts accuracy and precision.

## Refer to US EPA Methods Manual 600/4-79-020 "Methods for Chemical Analysis of Water and Wastes" Trace Metals 211, 2111 and 21111 Methods.

<b>Trace Metals w/ Mercury*</b> WP-15 contains 1 each of WP-15N and PLHG2-1AY   WP-15-500 contains 1 each of WP-15-500N and PLHG2-1AX								
Elements	Elements Concentration Matrix							
Hg*		10	10 µg/mL					
Cd, Se		2		25 μg/mL		5% HNO₃		
As, Be, Co, Cr, Cu, Fe, Mn, Ni,	Pb, Zn	10	100 μg/mL					
V		250 μg/mL		ıg/mL				
Al		500		500 μg/mL				
Volume	P	Part #		Volume		Part #		
125 mL	V	WP-15		500 mL		WP-15-500		

\* Mercury is supplied as a separate solution (PLHG2-1AY/AX) due to incompatibility with other elements.

Trace Metals w/o Mercury							
Elements	Elements Concentration		Concentration			Matrix	
Cd, Se	Cd, Se		25 μg/mL				
As, Be, Co, Cr, Cu, Fe, Mn, Ni,	Pb, Zn	10		100 μg/mL		5% HNO3	
V		250 μg/mL		570111003			
Al		500 μg/mL		g/mL			
Volume	Ра	Part #		Volume		Part #	
125 mL	WP	P-15N 50		500 mL		WP-15-500N	

Trace Metals II							
Elements	Conc	Concentration			Matrix		
Ag	10	10 μg/mL			2% HNO3		
Sb, Tl		25		25 μg/mL		270111003	
Volume	F	Part #		Volume		Part #	
125 mL		WP-3		500 mL		WP-3-500	

Trace Metals III							
Elements Co				tration	Matrix		
K, Mg		10	100 μg/mL			2% HNO <sub>3</sub>	
Ba, Ca, Mo, Na	Ba, Ca, Mo, Na		500 μg/mL				
Volume	P	Part #		Volume		Part #	
125 mL		MN-6		500 mL		MN-6-500	



#### Groundwater and Wastewater Pollution Control Check Standards (continued)

Alternate Metals						
Elements	c	oncentration		Matrix		
Be, Sb, Tl		5 μg/mL		2% HNO <sub>3</sub>		
Co, Cu, Mn, Ni, Zn		10 µg/mL				
Al, Fe, V		20 µg/mL				
Volume	Part #	Volum	e	Part #		
125 mL	WP-11	500 mL		WP-11-500		

Alternate Metals III							
Elements Co				itration	Matrix		
K, Mg		100 μg/mL		2% HNO3			
Ca, Na		500	500 μg/mL				
Volume	Р	Part #		Volume		Part #	
125 mL	I	MN-4		500 mL		MN-4-500	

Trace Metals w/ Mercury*, 125 mL				
Set Contains	Part #			
WP-15				
WP-3				
MN-6	TM-SET			
PLHG2-1AY				

Trace Metals w/o Mercury, 125 mL					
Set Contains	Part #				
WP-15N					
WP-3	TM-SETN				
MN-6					

\* Mercury is supplied as a separate solution (PLHG2-1AX/Y) due to incompatibility with other elements.

Alternate Metals, 125 mL					
Set Contains Part #					
WP-11	AM-SET				
MN-4	AIVI-SE I				



## Claritas PPT® Multi-Element Standards for ICP-MS



#### **Claritas PPT® Multi-Element Standards for ICP-MS**

Spex CertiPrep Claritas PPT<sup>®</sup> standards are a class of Inorganic Certified Reference Standards designed specifically for today's new generation of trace ICP and ICP-MS instrumentation. Based on extensive development, our chemists have formulated this line of high-purity standards for user convenience and stability.

Our Claritas PPT<sup>®</sup> selection of standards includes a complete series of multi-element solutions, many designed for use with US EPA Methods. These solutions are made with the highest purity materials available and are tested on our state-of-the-art ICP-MS. Spex CertiPrep Certified Reference Materials (CRMs) are manufactured under a quality system complying with the requirements of ISO 9001, ISO/IEC 17025 and ISO 17034.

#### **CALIBRATE WITH CONFIDENCE®**

Since 1954, our commitment to quality has made Spex CertiPrep the leading manufacturing of Inorganic Certified Reference Materials.

Every Claritas PPT<sup>®</sup> standard is supplied with a comprehensive SPEXertificate<sup>®</sup> which reports actual measured values in the final solution of both the major analytes and up to 68 trace element impurities at ppt levels. As always, each certificate includes NIST documentation and information regarding the methods used. Spex CertiPrep will guarantee the stability and accuracy of each Claritas PPT<sup>®</sup> standard to ± 0.5%, averaged certified analyte concentrations, for one full year from date of shipment.

#### When One in a Million Isn't Good Enough...Claritas PPT® Certified by ICP-MS

The great precision, sensitivity and rapid analysis of multi-element mixtures by ICP and ICP-MS instrumentation have mandated their widespread use in environmental, agricultural, semiconductor, metallurgical, and biological laboratories. Advancements in ICP spectroscopy over recent years have extended limits of detection into the low ppb (parts per billion) range. The ICP-MS technique has provided even greater sensitivity, extending detection limits routinely into the low ppt (parts per trillion) range. No longer is one in a million good enough!

#### **Did You Know?**

Spex CertiPrep offers a variety of customer loyalty programs. Our SPoints Program allows you to earn valuable credits every time you order. For more information, visit **spex.com/PurchasingOptions/SPointsRewards**.

Spex CertiPrep also offers a Loyalty Customer Discount Program to reward you with an *automatic* discount ranging from 5% to 20% off all qualified products.

There is no need to apply for either of these programs. You are automatically enrolled when you purchase Spex CertiPrep products!



#### **Tuning Solutions**

For ICP-MS instrumentation tuning and mass calibration prior to analysis.

#### **ICP-MS Tuning Solution 1**

A dilution of 100-fold to 1,000-fold, depending on the sensitivity of the instrument, is suggested. Dilute with equal parts of Claritas PPT<sup>®</sup> Nitric Acid Blank and Water Blank to yield a 1% nitric acid matrix.

ICP-MS Tuning Solution 1									
Elements Concentration Volume Matrix Part #									
Ba, Be, Ce, Co, In, Li, Mg, Pb, Rh, Tl, U, Y 10 μg/mL 125 mL 5% HCl/2% HNO <sub>3</sub> CL-TUNE-1									

#### **ICP-MS Tuning Solution 2**

A dilution of 1,000-fold is suggested. Dilute with Claritas PPT<sup>®</sup> Nitric Acid Blank and Water Blank to yield a 1% nitric acid matrix.

ICP-MS Tuning Solution 2				
Elements	Concentration	Volume	Matrix	Part #
Ba, Be, Ce, Co, In, Mg, Pb, Rh, U	10 µg/mL	125 mL	2% HNO <sub>3</sub>	CL-TUNE-2

#### **ICP-MS Tuning Solution 3**

A dilution of 1,000-fold is suggested. Dilute with Claritas PPT<sup>®</sup> Nitric Acid Blank and Water Blank to yield a 0.5% nitric acid matrix.

ICP-MS Tuning Solution 3					
Elements	Concentration	Volume	Matrix	Part #	
Be, Ce, Co, Fe, In, Mg, Pb, Th, U	1 μg/mL	125 mL	20/ 1100	CL-TUNE-3	
Ва	10 μg/mL	125 IIIL	2% HNO <sub>3</sub>	CL-TUNE-5	

#### **ICP-MS Tuning Solution 4**

A dilution of 100-fold to 1,000-fold is suggested. Dilute with Claritas PPT® Nitric Acid Blank to match your sample matrix.

ICP-MS Tuning Solution 4				
Elements Concentration Volume Matrix Part #				
Co, In, Li, Tl	10 µg/mL	125 mL	2% HNO <sub>3</sub>	CL-TUNE-4

#### **Calibration and Matrix Blanks**

The calibration, reagent, and rinse blanks are prepared by diluting the appropriate acid with water and any necessary internal standards to produce the required acid concentration, generally 1% HNO<sub>3</sub>. May be used for dilution or to establish baselines.

Calibration and Matrix Blanks						
Description Volume Matrix Part #						
Nitric Acid Blank	125 mL	2% HNO <sub>3</sub>	CLBLK-HNO3			
	250 mL	2% HNO <sub>3</sub>	CLBK-HNO3-250			
Hydrochloric Acid Blank	125 mL	2% HCl	CLBLK-HCL			
DI Water Blank	125 mL	H <sub>2</sub> O	CLBLK-H2O			
Di Water Blank	250 mL	H <sub>2</sub> O	CLBK-H2O-250			



#### **Instrument Calibration**

Dilute to the concentration appropriate for the instrument with equal parts of Claritas PPT<sup>®</sup> Nitric Acid Blank and Water Blank. For preparation every two weeks, or as needed.

ICP-MS Instrument Calibration Standard 1					
Elements	Concentration	Volume	Matrix	Part #	
Ag, Al, As, Ba, Be, Cd, Co, Cr, Cu, Mn, Mo, Ni, Pb, Sb, Se, Th, Tl, U, V, Zn	20 µg/mL	125 mL	5% HNO₃/tr. Tartaric Acid	CL-CAL-1	

ICP-MS Instrument Calibration Standard 1A					
Elements	Concentration	Volume	Matrix	Part #	
Ag, Al, As, Ba, Be, Cd, Co, Cr, Cu, Mn, Mo, Ni, Pb, Sb, Th, Tl, U, V, Zn	10 µg/mL	125 mL	5% HNO₃/tr. Tartaric Acid	CL-CAL-1A	
Se	50 μg/mL				

ICP-MS Instrument Calibration Standard 2					
Elements	Concentration	Volume	Matrix	Part #	
Ag, Al, As, Ba, Be, Ca, Cd, Co, Cr, Cu, Fe, K, Mg, Mn, Mo, Na, Ni, Pb, Sb, Se, Sn, Sr, Ti, Tl, V, Zn	100 μg/mL	125 mL	5% HNO₃/tr. Tartaric Acid/tr. HF	CL-CAL-2	

ICP-MS Instrument Calibration Standard 2A					
Elements	Concentration	Volume	Matrix	Part #	
Ag, Al, As, Ba, Be, Ca, Cd, Co, Cr, Cu, Fe, K, Mg, Mn, Na, Ni, Pb, Sb, Tl, V, Zn	10 µg/mL	125 mL	5% HNO₃/tr. Tartaric Acid	CL-CAL-2A	
Se	50 μg/mL				

ICP-MS Instrument Calibration Standard 3					
Elements         Concentration         Volume         Matrix         Part #					
Ca, Fe, K, Mg, Na	1,000 μg/mL	125 mL	5% HNO₃	CL-CAL-3	

ICP-MS Initial Calibration Verification Standard 1				
Elements	Concentration	Volume	Matrix	Part #
Ag, Al, As, Ba, Be, Cd, Co, Cr, Cu, Mn, Mo, Ni, Pb, Sb, Se, Th, Tl, U, V, Zn	10 µg/mL	125 mL	5% HNO₃/tr. Tartaric Acid	CL-ICV-1
Ca, Fe, K, Mg, Na, Sr	1,000 μg/mL	-		

ICP-MS Initial Calibration Verification Standard 2				
Elements	Concentration	Volume	Matrix	Part #
Sn, Ti	10 μg/mL	125 mL	2% HNO₃/tr. HF	CL-ICV-2

ICP-MS Initial Calibration Verification Standard 3					
Elements Concentration Volume Matrix Part #					
Ag, Al, As, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, Sb, Tl, V, Zn	10 μg/mL		5% HNO₃/tr. Tartaric Acid	CL-ICV-3	
Se	50 μg/mL	125 mL			
Ca, Fe, K, Mg, Na	100 µg/mL				



#### Instrument Calibration (continued)

ICP-MS Quality Control Standard 21						
Elements	Concentration	Volume	Matrix	Part #		
As, Be, Ca, Cd, Co, Cr, Cu, Fe, Li, Mg, Mn, Mo, Ni, Pb, Sb, Se, Sr, Ti, Tl, V, Zn	100 μg/mL for each component	125 mL	5% HNO₃/tr. Tartaric Acid/tr. H	CL-QC-21		
	ICP-MS	Quality Control Standa	ard 21A			
Elements	Concentration	Volume	Matrix	Part #		
As, Be, Ca, Cd, Co, Cr, Cu, Fe, Li, Mg, Mn, Ni, Sb, Tl, V, Zn	10 μg/mL	125 mL	5% HNO₃/tr. Tartaric Acid	CL-QC-21A		

#### **Internal Standards**

May be used to monitor and correct for changes that occur from differences between standards and samples. Since environmental samples often contain significant amounts of lithium, isotopically enriched 95% <sup>6</sup>Li can be analyzed as an internal standard, avoiding the signal from the <sup>7</sup>Li peak.

ICP-MS Internal Standard 1					
Elements	Concentration	Volume	Matrix	Part #	
Bi, Ho, In, <sup>6</sup> Li, Sc, Tb, Y	10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLISS-1	

ICP-MS Internal Standard 2					
Elements	Concentration	Volume	Matrix	Part #	
Bi, Ho, In, <sup>6</sup> Li, Rh, Sc, Tb, Y	10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLISS-2	

Single Element Internal Standards							
Elements	Concentration	Volume	Matrix	Part #			
Bi	10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLBI2-1AY			
Ge	10 μg/mL	125 mL	H₂O/tr. F⁻	CLGE9-1AY			
In	10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLIN2-1AY			
Rh	10 μg/mL	125 mL	2% HCl	CLRH1-1AY			
Sc	10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLSC2-1AY			
Tb	10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLTB2-1AY			
Y	10 μg/mL	125 mL	2% HNO <sub>3</sub>	CLY2-1AY			

ICP-MS Alternate Internal Standard 1						
Elements		Concentration			Matrix	
Bi, Ge, In, <sup>6</sup> Li, Sc, Tb, Y		10 μg/mL		5% HNO <sub>3</sub>		
Volume	Р	art #		Volume		Part #
125 mL	CL-I	SM1-100		500 mL		CL-ISM1-500

ICP-MS Alternate Internal Standard 2					
Elements		Conce	entration	Matri	ix
Bi, Ge, In, <sup>6</sup> Li, Lu, Rh, Sc, Tb	100 μg/mL		2% HN	IO <sub>3</sub>	
]	١	/olume	Part #		
		125 mL	CL-ISM2-100		

E-mail: USMet-CRMSales@antylia.com • Web: www.spex.com



#### **Instrument Check Standards**

For testing the calibration curves as Initial Calibration Verification (ICV) and Continuing Calibration Verification (CCV) solutions. The standards may be mixed and diluted as required.

ICP-MS I	nstrument Che	eck Standard 1	, 125 mL	ICP-MS I	nstrument Ch	eck Standard 3	, 125 m
Elements	Concentration	Matrix	Part #	Elements	Concentration	Matrix	Part
Ag, Al, As, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, Sb, Se, Tl,	10 μg/mL	2% HNO₃/tr. Tartaric Acid/	CL-ICS-1	Ca, Fe, K, Mg, Na	200 µg/mL	2% HNO <sub>3</sub>	CL-IC
V, Zn		tr. HF		ICP-MS I	nstrument Ch	eck Standard 5	, 125 m
				Elements	Concentration	Matrix	Part
ICP-MS I	nstrument Che	eck Standard 4	, 125 mL	Mo, Sn, Sr, Ti	10 µg/mL	2% HNO₃/tr. HF	CL-ICS
Elements	Concentration	Matrix	Part #				
Mo, Th, U	10 µg/mL	2% HNO <sub>3</sub>	CL-ICS-4	ICP-MS Ins	strument Cheo	<mark>ck Standards S</mark> e	et, 125 n
				Set Co	ontains	Part	t #
ICP-MS Me	rcury Single E	ement Standa	rd, 125 mL	CL-I	CS-1		
Elements	Concentration	Matrix	Part #	CL-I	CS-3	-	
Hg	10 µg/mL	5% HNO₃	CLHG2-1AY	CL-ICS-4		CL-ICS-SET	
				CL-I	CS-5		
				CLHG	52-1AY		

#### **Multi-Element Solution Standards**

Designed to contain virtually every element in the mass spectrum for concentration verification checks.

ICP-MS Multi-Element Solution 1, 125 mL					
Elements	Concentration	Matrix	Part #		
Ce, Dy, Er, Eu, Gd, Ho, La, Lu, Nd, Pr, Sc, Sm, Tb, Th, Tm, Y, Yb	10 μg/mL	5% HNO <sub>3</sub>	CLMS-1		

ICP-MS Multi-Element Solution 2 w/ Mercury*, 125 mL					
Elements	Concentration	Matrix	Part #		
Ag, Al, As, Ba, Be, Bi, Cd, Co, Cr, Cs, Cu, Fe, Ga, Hg*, In, K, Li, Mg, Mn, Na, Ni, Pb,m Rb, Se, Sr, Tl, U, V, Zn	10 µg/mL	5% HNO <sub>3</sub>	CLMS-2		

\* Mercury is supplied as a separate solution (CLHG2-1AY) due to incompatibility with other elements.

ICP-MS Multi-Element Solution 2 w/o Mercury, 125 mL Kit contains 1 each of CLMS-2N and CLHG2-1AY					
Elements	Concentration	Matrix	Part #		
Ag, Al, As, Ba, Be, Bi, Cd, Co, Cr, Cs, Cu, Fe, Ga, In, K, Li, Mg, Mn, Na, Ni, Pb,m Rb, Se, Sr, Tl, U, V, Zn	10 μg/mL	5% HNO3	CLMS-2N		

ICP-MS Multi-Element Solution 2A w/o Mercury, 125 mL					
Elements	Concentration	Matrix	Part #		
Ag, Al, As, Ba, Be, Ca, Cd, Co, Cr, Cs, Cu, Fe, Ga, K, Li, Mg, Mn, Na, Ni, Pb, Rb, Se, Sr, Tl, U, V, Zn	10 µg/mL	5% HNO <sub>3</sub>	CLMS-2AN		

	i-Element Solution I each of CLM		
Elements	Concentration	Matrix	Part #

Elements	Concentration	Matrix	Part #
Ag, Al, As, Ba, Be, Ca, Cd, Co, Cr, Cs, Cu, Fe, Ga, Hg*, K, Li, Mg, Mn, Na, Ni, Pb, Rb, Se, Sr, Tl, U, V, Zn	10 µg/mL	5% HNO <sub>3</sub>	CLMS-2A

\* Mercury is supplied as a separate solution (CLHG2-1AY) due to incompatibility with other elements.

ICP-MS Multi-Element Solution 3, 125 mL				
Elements	Concentration	Matrix	Part #	
Au, Hf, Ir, Pd, Pt, Rh, Ru, Sb, Sn, Te	10 µg/mL	10% HCI/1% HNO <sub>3</sub>	CLMS-3	



#### **Multi-Element Solution Standards**

Designed to contain virtually every element in the mass spectrum for concentration verification checks.

ICP-MS Multi-Element Solution 4, 125 mL				
Elements	Concentration	Matrix	Part #	
B, Ge, Mo, Nb, P, Re, S, Si, Ta, Ti, W, Zr	10 μg/mL	H <sub>2</sub> O/tr. HF/tr. HNO <sub>3</sub>	CLMS-4	

ICP-MS Multi-Element Solution Standards Set with Mercury*, 125 mL		
Set Contains	Part #	
CLMS-1		
CLMS-2		
CLMS-3		
CLMS-4	CLMS-SET	
CLBLK-HNO3	CLIVIS-SET	
CLBLK-HCL		
CLBLK-H2O		
CLHG2-1AY		

ICP-MS Multi-Element Solution 5, 125 mL				
Elements	Concentration	Matrix	Part #	
Be, Bi, Ce, Co, In, Mg, Ni, Pb, U	10 µg/mL	2% HNO <sub>3</sub>	CLMS-5	

ICP-MS Multi-Element Solution Standards Set without Mercury, 125 mL		
Set Contains Part #		
CLMS-1		
CLMS-2N	-	
CLMS-3		
CLMS-4	CLMS-SETN	
CLBLK-HNO3		
CLBLK-HCL		
CLBLK-H2O		

\* Mercury is supplied as a separate solution (CLHG2-1AY) due to incompatibility with other elements.

#### **Memory Test Solutions**

To identify or confirm the maximum concentration of an analyte that does not cause a memory effect greater than the contract required detection limit (CRDL). The test solutions are not analyzed directly; equal volumes of the two are mixed and then introduced into the instrument for a normal sample exposure time. A blank is then run to confirm that all analyte memory effects are below the CRDL.

ICP-MS Memory Test 1, 125 mL			
Elements	Concentration	Matrix	Part #
Ag, As, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, Se, Tl, V, Zn	20 µg/mL	5% HNO₃	CL-MEM-1
Al, Ca, Fe, K, Mg, Na	1,000 μg/mL		

Memory Test Solutions Set, 125 mL		
Contents Part #		
CL-MEM-1		
CL-MEM-2		

ICP-MS Memory Test 2, 125 mL			
Elements	Concentration	Matrix	Part #
Mo, Sb, Ti	20 µg/mL		
P, S	1,000 µg/mL	H <sub>2</sub> O/tr. HF	CL-MEM-2
С	2,000 µg/mL		
CI	7,200 μg/mL		

#### **Gold Blank Standard**

May be run between samples to reduce the memory effect rising from mercury. It is recommended that a solution of gold is five times the concentration of the mercury in the prior sample run.

Gold Blank Standard, 125 mL				
Element Concentration Matrix Part #				
Au	100 μg/mL	2% HCI	CLAU1-1Y	



#### **Spike Sample Analysis**

Designed for addition to a matrix blank prior to digestion for both water and soil. An aliquot of the respective Spike Standard should be added to produce the proper concentration levels in the digestate.

ICP-MS Spike Sample Standard 1 (Water), 125 mL			
Elements	Concentration	Matrix	Part #
Ag, Be, Cd, Se, Tl	25 μg/mL		
As, Pb	50 µg/mL	5% HNO₃/tr. Tartaric Acid/ tr. HF	CL-SPIKE-1
Co, Cr, Cu, Mn, Ni, Sb, V	100 µg/mL		
Ba, Zn	250 μg/mL		
Fe	500 μg/mL		

ICP-MS Spike Sample Standard 2 (Soil), 125 mL				
Elements	Concentration	Matrix	Part #	
Ag, Be, Se, Tl	25 μg/mL			
As, Cd	50 μg/mL	5% HNO₃/tr. Tartaric Acid/ tr. HF		
Co, Pb, Sb	100 µg/mL		CL-SPIKE-2	
Ni	125 µg/mL		CL-SPIKE-2	
V	150 μg/mL			
Ba, Cr, Cu, Zn	250 µg/mL			

#### Isotope Standards

Spex CertiPrep Claritas PPT<sup>®</sup> Isotope Standards can be used for isotope dilution analysis and internal standards. The internal standard element must have similar characteristics to the tested/measured element(s) and not be present in the sample. Using isotope modification standards, the chemist can use less internal standard and have a higher intensity reading while avoiding interferences.

Every Claritas PPT<sup>®</sup> standard is supplied with a comprehensive SPEXertificate<sup>®</sup> which reports actual measured values in the final solution of both the major analytes and up to 68 trace elemental impurities at ppt levels.

Spex CertiPrep will guarantee the stability and accuracy of each Claritas PPT<sup> $\circ$ </sup> standard to  $\pm$  0.5%, averaged labeled analyte concentrations, for one full year from date of shipment.

Additionally, the SPEXertificate® for the isotope standard will consist of:

- The isotope ratio measured by ICP-MS
- The concentration of each isotope calculated by ICP-MS and measured by ICP

	Isotope Standards					
Elements	Concentration	Volume	Matrix	Part #		
Boron 10	10 µg/mL	125 mL	H <sub>2</sub> O	ISOT-B10		
Boron 11	10 µg/mL	125 mL	H <sub>2</sub> O	ISOT-B11		
Copper 65	10 µg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-CU65		
Lithium 6	10 µg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-LI6		
Lead 206	10 µg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-PB206		
Lead 207	10 µg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-PB207		
Strontium 86	10 µg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-SR86		
Zinc 68	10 µg/mL	125 mL	2% HNO <sub>3</sub>	ISOT-ZN68		

#### **Helpful Hint**

Don't forget your Gold Blank Standard, CLAU1-1Y (see page 62), to reduce the memory effect of mercury!



## Multi-Element CLP Standards for ICP & ICP-MS




#### **CLP Standards for ICP & ICP-MS**

Our Contract Laboratory Program (CLP) standards allow you to Calibrate with Confidence<sup>®</sup>. The following standards are to be used in conjunction with the Statement of Work for Inorganic Analysis; Multi-Media/Multi-Concentration Document Number ILM 05.3/ISM 01.2.

The final ICP check, performed in our own laboratories, is your stamp of assurance. We calibrate our instruments with traceable reference materials and show you the actual found value of the solution you receive, not just an ideal, calculated number as so many other standards manufacturers do. The section that follows contains multi-element standards referenced to their application. The combination of elements, concentrations, and matrices listed have been designed by Spex CertiPrep for convenience of use and stability.

The US EPA SOW ILM 05.3/ISM 01.2 gives specific procedures for the methods of analysis, target elements, and concentration levels. Standards are specified not only by the elements present and their relative concentrations, but also the order and frequency of running standards, blanks and samples. Details of these specifications may be found in the US EPA SOW ILM 05.3/ISM 01.2 in the following sections:

- Exhibit C, Inorganic Target Analyte List (TAL)
- Exhibit D, Analytical Methods
- Exhibit E, QA/QC Requirements

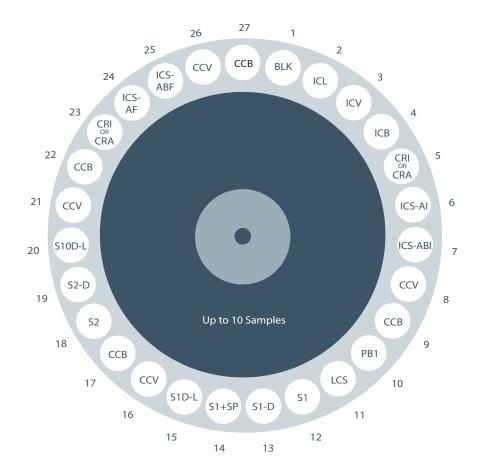

#### Typical set-up for standards samples and blanks to be run for CLP analysis.



#### **Standards for the Contract Laboratory Program**

Following is a list of samples, standards and blanks in a possible running sequence as suggested by the Contract Laboratory Program protocols as seen on page 65. Also listed are the Spex CertiPrep standards and solutions to be used in preparing the final blanks, standards and spikes. Complete descriptions of each solution are provided on the following pages.

1. BLK

Blank: PLBLKs

- 2. ICL Initial Calibration Solution: Mixture of ICALs
- 3. ICV Initial Calibration Verification: ICV-1A
- 4. ICB Initial Calibration Blank (not digested): PLBLKs
- 5. CRI (ICP-AES) or CRA (AA) CRDL-2
- 6. ICS-AI Initial Interferents, A: INT-A1
- 7. ICS-ABI Initial Interferents and Analytes, AB: INT-A1, INT-B3
- 8. CCV Continuing Calibration Verification (50% ICV): ICV-1A
- 9. CCB

Continuing Calibration Blank: PLBLKs (if results of CCV and CCB are within limits, proceed to next sample, if not, stop run)

10. PB1

Preparation Blank: Digested Water or Soil Blank

11. LCS

Laboratory Control Sample (digested): ICV-1A

12. S1

Sample #1

- 13. S1-D Sample #1 Duplicate
- 14. S1+SP Sample #1 with SPIKE: SPIKE-1

#### 15. S1D-L

Sample #1 Diluted Five-Fold

#### 16. CCV

Continuing Calibration Verification (50% ICV): ICV-1A

#### 17. CCB

Continuing Calibration Blank: PLBLKs (if results of CCV and CCB are within limits, proceed to next sample, if not, stop run)

#### 18. S2

Sample #2

#### 19. S2-D

Sample #2 Duplicate (up to 10 samples may be run as long as CCV and CCB tests are within accepted limits)

#### 20. S10D-L

Sample #10 Diluted Five-Fold

#### 21. **CCV**

Continuing Calibration Verification (50% ICV): ICV-1A

#### 22. CCB

Continuing Calibration Blank PLBLKs (if results of CCV and CCB are within limits, proceed to next sample, if not, stop run)

#### 23. CRI (ICP-AES) or CRA (AA)

2 x Contract Required Detection Limits: CRDL-1

#### 24. ICS-AF

Final Interferents, A: INT-A1

#### 25. ICS-ABF

Final Interferents and Analytes, AB: INT-A1, INT-B3

26. CCV Continuing Calibration Verification (50% ICV): ICV-1A

#### 27. CCB Continuing Calibration Blank: PLBLKs



#### **Instrument Calibration for CLP Methods**

May be used separately or mixed together for preparation of the analytical curve. When mixed, these solutions will yield a standard containing all of the elements in the Target Analyte List (TAL). Instruments must be calibrated daily, every 24 hours, or each time the instrument is set-up. Calibration standards must be prepared fresh for each analysis and discarded after use. A dilution of 100-fold is suggested for ICAL-2, ICAL-3 and ICAL-4A, and a dilution of 10-fold for ICAL-1. Antimony and mercury can be diluted as required.

For ISM 01.2, at least one of your calibration standards must be at the Contract Required Quantification Limit (CRQL). See ISM 01.2 sections for CRQL standards.

Applies to part numbers ICAL-1, ICAL-2, ICAL-3, ICAI-4A, ICAL-4A-500, PLSB7-2Y, and PLHG2-1Y.

#### **Initial Calibration Verification for CLP Methods**

The US EPA retains analytical services through the Contract Laboratory Program (CLP). The CLP follows detailed SOPs derived from EPA methods. The CLP methods require calibration of analytical instrumentation within the expected quantitative range (ICAL standards) and additional CLP QA standards (ICV standards) to verify the calibration curve at each of the selected wavelengths that will be used for sample analysis.

Our verification standards, ICV-1A, ICV-2 and ICV-3, contain all of the elements on the TAL list and are independent standards for testing an instruments calibration curve. Spex CertiPrep's ICV standards are designed to be used with their corresponding instrument calibration standards (ICAL). Refer to page 71 for a complete list of ICAL standards.

We recommend dilution of ICV standards to a range within your instruments calibration curve. A dilution of 200-fold is recommended for ICV-2A, PLSB7-2X and ICV-2C. A dilution of 20-fold is recommended for ICV-1A and ICV-3.

Applies to part numbers ICV-1A and ICV-3.

#### **Contract Required Detection Limits, CRDL**

#### CLP ISM 01.2 & ILM 05.3 Standards for ICP

For ILM 05.3, a standard must be run at the Contract Required Detection Limits (CRDL). To verify linearity near the CRQL, this standard is analyzed at the beginning of the analysis run, after the ICV/ICB and before the ICSA and ICSAB. In addition, this standard must be run at a frequency of not less than 20 analytical samples and at the end of the analysis run, followed by the ICSA/ISCAB. The sequence order is CCV, CCB, CRI, ICSA, ICSAB, CCV, and CCB.

For ISM 01.2, at least one of your calibration standards must be at the Contract Required Detection Limit (CRDL). This standard, when diluted, can be used as a calibration standard to fulfill this requirement.

Applies to part numbers CRDL-2 and CRDL-2A.

#### CLP ISM 01.2 Standards for ICP-MS

For ISM 01.2, at least one of your calibration standards must be at the Contract Required Detection Limit (CRDL). This standard, when diluted, can be used as a calibration standard to fulfill this requirement.

Applies to part numbers CL-CRDL-2.

#### CLP ILM 05.3 Standards for ICP-MS

A standard must be run at the Contract Required Detection Limits (CRDL). To verify linearity near the CRQL, this standard is analyzed at the beginning of the analysis run after the ICV/ICB and before the ICSA and ICSAB. In addition, this standard must be run at a frequency of not less than 20 analytical samples and at the end of the analysis run, followed by the ICSA/ ICSAB. The sequence order is CCV, CCB, CRI, ICSAB, CCV, CCB.

Applies to part numbers CL-CRDL-2



#### Contract Required Detection Limits, CRDL (continued)

#### CLP ILM 02.0 & 05.2 Standards for ICP and CLP-M/6020/SW-846 Standards for ICP-MS

A standard must be run at two times the Contract Required Detection Limits (CRDL), or at two times the Instrument Detection Limits (IDL), whichever is greater. This standardization is performed at the start and the end of each sample analysis or at least twice in each eight hour shift.

All elements to be analyzed must be run except Al, Ba, Ca, Fe, K, Mg, and Na.

Our CRDL-1 and CL-CRDL-1standards contain all of the required elements on the TAL, in their appropriate concentration ratios. CRDL-1 should be diluted by a factor of 1,000 prior to use in the "two times CRDL" run for ICP-AES analysis. For analysis by atomic absorption, CRDL-1 should be diluted by a factor of 2,000 prior to use in the "one time CRDL" run. CL-CRDL-1 should be diluted by a factor of 1,000 prior to use in the "two times CL-CRDL" run for ICP analysis. For analysis by atomic absorption, CL-CRDL-1 should be diluted by a factor of 2,000 prior to use in the "one time CL-CRDL" run.

Applies to part number CRDL-1 and CL-CRDL-1.

#### **Interference Checks**

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP

For verification of inter-element and background correction factors at the beginning and the end of each analysis run. In addition, a verification must be done after every 20<sup>th</sup> sample. Two solutions are required for the most common interference check: Solution A, the interferents alone (INT-A1) and Solution AB, a combination of interferents (INT-A1) and analytes (INT-B3). Solution A is prepared by diluting INT-A1 20-fold. Solution AB is prepared by diluting INT-A1 20-fold and INT-B3 100-fold; for example, 5 mL of INT-A1 and 1 mL of INT-B3 into a 100 mL volumetric flask, brought to volume with a matrix blank (see pages 22 & 40). Once prepared, the solutions should be analyzed consecutively, starting with Solution A.

Applies to part numbers INT-A1 and INT-B3.

#### **CLP ILM 02.0 Standards for ICP**

For verification of inter-element and background correction factors at the beginning and the end of each analysis run. In addition, a verification must be done after every 20<sup>th</sup> sample. Two solutions are required for the most common interference check: Solution A, the interferents alone (INT-A1) and Solution AB, a combination of interferents (INT-A1) and analytes (INT-B1). Solution A is prepared by diluting INT-A1 20-fold. Solution AB is prepared by diluting INT-A1 20-fold and INT-B1 100-fold; for example, 5 mL of INT-A1 and 1 mL of INT-B1 into a 100 mL volumetric flask, brought to volume with a matrix blank (see pages 22 & 40). Once prepared, the solutions should be analyzed consecutively, starting with Solution A.

Applies to part numbers INT-A1 and INT-B1.

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP-MS

For verification of inter-element and background correction factors at the beginning and the end of each analysis run. In addition, a verification must be done after every 20<sup>th</sup> sample. Two solutions are required for the most common interference check: Solution A, the interferents alone (CL-INT-A2) and Solution AB, a combination of interferents (CL-INT-A2) and analytes (CL-INT-B3 or CL-INT-B4). Solution A is prepared by diluting CL-INT-A2 10-fold. Solution AB is prepared by diluting CL-INT-A2 10-fold and CL-INT-B3 or CL- INT-B4 100-fold; for example, 10 mL of CL-INT-A2 and 1 mL of CL-INT-B3 or CL-INT-B4 into a 100 mL volumetric flask, brought to volume with a matrix blank (see pages 22 & 40). Once prepared, the solutions should be analyzed consecutively, starting with Solution A.

Applies to part numbers CL-INT-A2, CL-INT-B3, CL-INT-B3N, and CL-INT-B4.



#### Interference Checks (continued)

#### CLP-M/6020/SW-846 Standards for ICP-MS

For verification of inter-element and background correction factors at the beginning and the end of each analysis run. In addition, a verification must be done after every 20<sup>th</sup> sample. Two solutions are required for the most common interference check: Solution A, the interferents alone (CL-INT-A1) and Solution AB, a combination of interferents (CL-INT-A1) and analytes (CL-INT-B1). Solution A is prepared by diluting CL-INT-A1 20-fold. Solution AB is prepared by diluting CL-INT-A1 20-fold and CL-INT-B1 100-fold; for example, 5 mL of CL-INT-A1 and 1 mL of CL-INT-B1 into a 100 mL volumetric flask, brought to volume with a matrix blank (see pages 22 & 40). Once prepared, the solutions should be analyzed consecutively, starting with Solution A.

Applies to part numbers CL-INT-A1 and CL-INT-B1.

#### Alternate Standards

We also provide a solution of alternate interferents and alternate analytes. Alternate interferents A (INT-A2) and alternate analytes B (INT-B2) may be prepared in combination with the INT-A1 and INT-B3 solutions mentioned, or any combination involving the four solutions, depending on the analytes and interferents of interest to you.

We provide ICP-MS interferents and interferent check solutions for SW-845.

Applies to part numbers INT-A2, INT-B2, CL-INT-A3, and CL-INT-B2.

#### Spike Sample Analysis

In the spike sample analysis, a spike containing the required elements, in their respective amount, is added to the sample prior to addition of any reagents, digestions, distillation, etc. Information is then provided on the effects of the sample matrix and the entire methodology.

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP

Our spike standard, SPIKE-4, provides all of the analytes required for the IC, ICP-AES and the AA spike.

Applies to part numbers SPIKE-4.

#### CLP ILM 02.0 Standards for ICP

Our spike standard, SPIKE-1, provides all of the analytes required for the ICP-AES and the AA spike. Add 1 mL of SPIKE-1 to aqueous samples and 2 mL of SPIKE-1 to solid samples prior to digestion.

Applies to part numbers SPIKE-1 and SPIKE1-500.

#### CLP ILM 05.2 Standards for ICP-MS

Our spike standard, CL-SPIKE-3, provides all of the analytes required for the ICP and AA spike.

Applies to part number CL-SPIKE-3.

#### CLP ISM 01.2 Standards for ICP-MS

Our spike standard, CL-SPIKE-4, provides all of the analytes required for the ICP-MS and the AA spike. Add 1 mL of CL-SPIKE-4 to aqueous samples and 2 mL of CL-SPIKE-4 to solid samples prior to digestion.

Applies to part number CL-SPIKE-4.



#### Spike Sample Analysis (continued)

#### **CLP ILM 05.3 Standards for ICP-MS**

Our spike standard, CL-SPIKE-4, provides all of the analytes required for the ICP-MS.

Applies to part number CL-SPIKE-4.

#### CLP-M/6020/SW-846 Standards for ICP-MS

Our spike standards, CL-SPIKE-1 and CL-SPIKE-2, provide all of the analytes required for ICP-MS. Add 1 mL of CL-SPIKE-1 to aqueous samples and 2 mL of CL-SPIKE-2 to solid samples prior to digestion.

Applies to part numbers CL-SPIKE-1 and CL-SPIKE-2.

#### **Instrument Calibration for CLP Methods**

See page 67 for details.

Instrument Calibration Standard 1					
Elements Concentration Matrix Volume					
Ca, K, Mg, Na	5,000 μg/mL	5% HNO3	125 mL	ICAL-1	

Instrument Calibration Standard 2					
Elements	Concentration	Matrix	Volume	Part #	
Ag, Cr	100 μg/mL				
Mn	150 μg/mL	50/ 11010			
Zn	200 μg/mL	5% HNO <sub>3</sub>	125 mL	ICAL-2	
Ni	400 μg/mL				

Instrument Calibration Standard 3					
Elements	Concentration	Matrix	Volume	Part #	
Ве	50 μg/mL				
Cu	250 μg/mL				
Co, V	500 μg/mL	5% HNO₃	125 mL	ICAL-3	
Fe	1,000 μg/mL				
Al, Ba	2,000 μg/mL				

Instrument Calibration Standard 4A							
Elements		Concentration			Matrix		
Pb		30		30 µg/mL			
Cd, Se		50 μg/mL		5% HNO <sub>3</sub>			
As, TI		100 μg/mL					
Volume		Part # Volume			Part #		
125 mL		ICAL-4A	ł	500 mL		ICAL-4A-500	
125 IIIL		ICAL-4A		500 ML		ICAL-4A-500	

The following dilutions are suggested: a dilution of 250-fold for ICAL-1; 100-fold for ICAL-2 and ICAL-3; 20-fold for ICAL-4A. Antimony and mercury can be diluted as required.



#### Instrument Calibration for CLP Methods (continued)

See page 67 for details.

Single Element Standards					
Elements	Concentration	Matrix	Volume	Part #	
Hg	100 µg/mL	5% HNO <sub>3</sub>	125 mL	PLHG2-1Y	
Sb	1,000 μg/mL	H <sub>2</sub> O/0.6% Tartaric Acid/tr. HNO <sub>3</sub>	125 mL	PLSB7-2Y	

#### **Initial Calibration Verification for CLP Methods**

See page 67 for details.

	Initial Calibration Verification Standard 1A					
Elements	Concentration	Matrix	Volume	Part #		
Pb	3 μg/mL					
Be, Cd, Se	5 μg/mL					
Ag, As, Cr, Tl	10 μg/mL					
Mn	15 μg/mL		500 mL	ICV-1A		
Zn	20 μg/mL					
Cu	25 μg/mL					
Ni	40 μg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF				
Co, V	50 μg/mL					
Sb	60 μg/mL					
Fe	100 μg/mL					
Al, Ba	200 µg/mL					
Ca, K, Mg, Na	5,000 μg/mL					

Initial Calibration Verification Standard 3					
Elements	Concentration	Matrix	Volume	Part #	
Ве	5 μg/mL				
Cr	20 µg/mL				
Ag, Cu	25 μg/mL				
Cd, Co, Mn, Ni, V, Zn	50 μg/mL	5% HNO <sub>3</sub>	500 mL	ICV-3	
As, Fe, Pb, Se, Tl	100 μg/mL				
Al, Ba	200 μg/mL				
Ca, K, Mg, Na	500 μg/mL				

#### **Helpful Hint**

Having trouble finding the Multi-Element Standard you need? Fill out the Custom Standard Request Form at spex.com/CustomProduct/InorganicProduct.



#### **Contract Required Detection Limits**

#### CLP ISM 01.2 and ILM 05.3 Standards for ICP

See page 67 for details.

ICP Contract Required Detection Limit Standard 2					
Elements	Concentration	Matrix	Volume	Part #	
Be, Cd	10 μg/mL				
As, Cr, Pb, Ag	20 μg/mL				
Mn	30 μg/mL				
Cu, Tl	50 μg/mL				
Se	70 μg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF	125 mL	CRDL-2	
Ni	80 μg/mL				
Co, V	100 µg/mL				
Sb, Zn	120 µg/mL				
Fe	200 µg/mL				

ICP Contract Required Detection Limit Standard 2A					
Elements	Concentration	Matrix	Volume	Part #	
Al, Ba	200 µg/mL	10% UNO	125 ml	CRDL-2A	
Ca, K, Mg, Na	5,000 μg/mL	10% HNO <sub>3</sub>	125 mL	CRDL-2A	

#### CLP ISM 01.2 and ILM 05.3 Standards for ICP-MS

See page 67 for details.

ICP-MS Contract Required Detection Limit Standard 2					
Elements	Concentration	Matrix	Volume	Part #	
Ag, As, Be, Cd, Co, Mn, Ni, Pb, Tl	2 μg/mL				
Cr, Cu, Sb, Zn	4 μg/mL				
Se, V	10 μg/mL				
Ва	20 µg/mL	5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF	125 mL	CL-CRDL-2	
AI	40 μg/mL				
Fe	400 µg/mL				
Ca, K, Mg, Na	1,000 μg/mL				

#### **Helpful Hint**

How do I prevent my antimony oxide (Sb<sub>2</sub>O<sub>3</sub>) solution from becoming a gelatin when I dissolve it in tartaric acid?

While Sb<sub>2</sub>O<sub>3</sub> dissolves easily in tartaric acid and water, the solution is clear at first but a gelatin-like substance can form over time. This is a form of mold. Adding a trace amount of nitric acid to the solution can prevent this.



#### Contract Required Detection Limits (continued)

#### CLP ILM 02.0 & 05.2 Standards for ICP and CLP-M/6020/SW-846 Standards for ICP-MS

See page 68 for details.

ICP Contract Required Detection Limit Standard 1					
Elements	Concentration	Matrix	Volume	Part #	
Pb	6 μg/mL				
Be, Cd, Se	10 μg/mL				
Ag, As, Cr, Tl	20 μg/mL				
Mn	30 μg/mL				
Zn	40 μg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF	125 mL	CRDL-1	
Cu	50 μg/mL				
Ni	80 μg/mL				
Co, V	100 μg/mL				
Sb	120 μg/mL				

#### CLP-M/6020/SW-846 Standards for ICP-MS

See page 68 for details.

ICP-MS Contract Required Detection Limit Standard 1						
Elements	Concentration	Matrix	Volume	Part #		
Pb	0.3 μg/mL		125 mL	CL-CRDL-1		
Be, Cd, Se	0.5 μg/mL					
Ag, As, Cr, Tl	1 μg/mL					
Mn	1.5 μg/mL					
Zn	2 µg/mL					
Cu	2.5 μg/mL					
Ni	4 μg/mL	5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF				
Co, V	5 μg/mL					
Sb	6 μg/mL					
Fe	10 μg/mL					
Al, Ba	20 μg/mL					
Ca, K, Mg, Na	500 μg/mL					

#### **Interference Checks**

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP

See page 68 for details.

ICP Interferents A1						
Elements	Concentration	Matrix	Volume	Part #		
Fe	2,000 μg/mL	- 5% HNO <sub>3</sub>	500 mL	INT-A1		
Al, Ca, Mg	5,000 μg/mL					



#### Interference Checks (continued)

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP

See page 68 for details.

ICP Analytes B3									
Elements	Elements Concentration Matrix Volume Part #								
Pb, Se	5 μg/mL								
As, TI	10 μg/mL		125 mL						
Ag	20 µg/mL			INT-B3					
Ba, Be, Co, Cr, Cu, Mn, V	50 μg/mL	5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF		IN I-B3					
Sb	60 μg/mL								
Cd, Ni, Zn	100 μg/mL								

#### **CLP ILM 02.0 Standards for ICP**

See page 68 for details.

ICP Interferents A1						
Elements	Concentration	Matrix	Volume	Part #		
Fe	2,000 μg/mL		500 ml			
Al, Ca, Mg	5,000 μg/mL	5% HNO₃	500 mL	INT-A1		

ICP Analytes B1						
Elements	Concentration	Matrix	Volume	Part #		
Ba, Be, Co, Cr, Cu, Mn, V	50 μg/mL	5% HNO3	125 mL	INT-B1		
Ag, Cd, Ni, Pb, Zn	100 μg/mL	570 rinO <sub>3</sub>	I ZJ IIIL	IIN I - D I		

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP-MS

See page 68 for details.

ICP-MS Interferents A2						
Elements Concentration Matrix Volume Part #						
Mo, Ti	20 µg/mL					
Al, Ca, Fe, K, Mg, Na, P, S	1,000 μg/mL		125			
С	2,000 μg/mL	− 5% HNO₃/tr. HF	125 mL	CL-INT-A2		
Cl	10,000 μg/mL					

ICP-MS Analytes B3 w/ Mercury* - Kit contains 1 each of CLINT-B3N and CLHG2-1AY						
Elements	Concentration	Matrix	Volume	Part #		
Ag, As, Ba, Be, Cd, Co, Cr, Cu, Hg*, Mn, Ni, Pb, Sb, Se, Tl, V, Zn	2 μg/mL	2% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF	125 mL	CL-INT-B3		

\* Mercury is supplied as a separate solution (CLHG2-1AY) due to incompatibility with other elements.

ICP-MS Analytes B3 w/o Mercury					
Elements	Concentration	Matrix	Volume	Part #	
Ag, As, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, Sb, Se, Tl, V, Zn	2 μg/mL	2% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF	125 mL	CL-INT-B3N	



#### Interference Checks (continued)

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP-MS

See page 68 for details.

ICP-MS Analytes B4						
Elements	Concentration	Matrix	Volume	Part #		
Ag, As, Ba, Be, Cd, Co, Sb, Se, Tl, V	20 μg/mL					
Cu, Pb, Ni	25 μg/mL	5% HNO₃/tr. HF	125 mL	CL-INT-B4		
Mn, Zn	30 μg/mL					
Cr	40 μg/mL					

#### CLP-M/6020/SW-846 Standards for ICP-MS

#### See page 69 for details.

ICP-MS Interferents A1						
Elements	Concentration	Matrix	Volume	Part #		
Mo, Ti	20 µg/mL					
Al, K, Mg, P, S	1,000 μg/mL		125 mL			
С	2,000 μg/mL					
Fe, Na	2,500 μg/mL	− 5% HNO₃/tr. HF		CL-INT-A1		
Са	3,000 μg/mL					
CI	21,215 μg/mL					

ICP-MS Analytes B1						
Elements	Concentration	Matrix	Volume	Part #		
Ag	5 μg/mL					
As, Cd, Se, Zn	10 μg/mL	2% HNO <sub>3</sub>	125 mL	CL-INT-B1		
Co, Cr, Cu, Mn, Ni, V	20 μg/mL					

#### Spike Sample Analysis

#### CLP ILM 02.0 Standards for ICP

See page 69 for details.

ICP Spike Sample 1						
Elements		Concentration			Matrix	
Ag, Be, Cd	Ag, Be, Cd		g/r	nL		
Cr		20 µ	ıg/	′mL		
Cu	Cu		25 μg/mL		- 5% HNO₃/tr. Tartaric Acid/tr. HF	
Co, Mn, Ni, Pb, Sb, V, Zn		50 μg/mL				
Fe		100 μg/mL				
Al, As, Ba, Se, Tl		200 µg/mL				
Volume		Part #	[	Volume		Part #
125 mL		SPIKE-1		500 mL		SPIKE-1-500



#### Spike Sample Analysis (continued)

#### CLP ILM 05.2 Standards for ICP-MS

See page 69 for details.

ICP-MS Spike Sample 3								
Elements	Elements Concentration Matrix Volume							
Se	1 μg/mL							
Pb	2 µg/mL							
As	4 μg/mL							
Ag, Be, Cd, Tl	5 μg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF	125 mL					
Sb	10 μg/mL			CL-SPIKE-3				
Cr	20 μg/mL							
Cu	25 μg/mL							
Co, Mn, Ni, V, Zn	50 μg/mL							
Al, Ba	200 µg/mL							

#### CLP ISM 01.2 and ILM 05.2 & 05.3 Standards for ICP

#### See page 69 for details.

ICP Spike Sample 4								
Elements	Elements Concentration Matrix Volume Pa							
Pb	2 μg/mL							
As	4 μg/mL							
Ag, Be, Cd, Se, Tl	5 μg/mL							
Sb	10 µg/mL		125 mL					
Cr	20 µg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF		SPIKE-4				
Cu	25 μg/mL							
Co, Mn, Ni, V, Zn	50 μg/mL							
Fe	100 µg/mL							
Al, Ba	200 µg/mL							

#### CLP-M/6020/SW-846 Standards for ICP-MS

See page 70 for details.

	ICP-MS Spike Sample 1 (Water)				
Elements	Concentration	Matrix	Volume	Part #	
Ag, Be, Cd, Se, Tl	25 μg/mL				
As, Pb	50 μg/mL				
Co, Cr, Cu, Mn, Ni, Sb, V	100 µg/mL	5% HNO₃/tr. Tartaric Acid/tr. HF	125 mL	CL-SPIKE-1	
Ba, Zn	250 μg/mL				
Fe	500 μg/mL				

ICP-MS Spike Sample 2 (Soil)							
Elements Concentration Matrix Volume Part #							
Ag, Be, Se, Tl	25 μg/mL						
As, Cd	50 μg/mL						
Co, Pb, Sb	100 µg/mL		125 mL	CL-SPIKE-2			
Ni	125 µg/mL	5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF					
V	150 µg/mL						
Ba, Cr, Cu, Zn	250 μg/mL						



#### Spike Sample Analysis (continued)

#### CLP ISM 01.2 and ILM 05.3 Standards for ICP-MS

See pages 69-70 for details.

ICP-MS Spike Sample 4				
Elements	Concentration	Matrix	Volume	Part #
Se	1 μg/mL			
Pb	2 μg/mL			
As	4 μg/mL			
Be, Cd, Ag, Tl	5 μg/mL		125 mL	
Sb	10 μg/mL			CL-SPIKE-4
Cr	20 μg/mL	5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF		CL-SPIKE-4
Cu	25 μg/mL			
Co, Mn, Ni, V, Zn	50 μg/mL			
Fe	100 µg/mL			
Al, Ba	200 µg/mL			

#### **Alternate Standards**

#### Interference Checks

See page 69 for details.

ICP Alternate Interferents A				
Elements	Concentration	Matrix	Volume	Part #
Cr, Cu, Mn, Ni, Ti, V	1,000 μg/mL	5% HNO₃/tr. F⁻	500 mL	INT-A2

	ICP Alternate Interferents B				
Elements	Concentration	Matrix	Volume	Part #	
Ca, Fe, Mg, Si	10 μg/mL	− 5% HNO₃/tr. Tartaric Acid/tr. HF	125 mL	INT-B2	
Al, As, B, Mo, Na, Sb, Se, Tl	100 μg/mL		12 <i>3</i> IIIL	IIN I-DZ	

ICP-MS Interferents Check Solution B2 (for SW-846)				
Elements	Concentration	Matrix	Volume	Part #
Ag, As, Cd, Co, Cr, Cu, Mn, Ni, Zn	10 µg/mL	2% HNO <sub>3</sub>	125 mL	CL-INT-B2

ICP-MS Interferents Check Solution A3 (for SW-846)					
Elements	Concentration	Matrix	Volume	Part #	
Mo, Ti	20 µg/mL				
Al, Mg, P, K, S	1,000 μg/mL		125 mL CL		
С	2,000 μg/mL				
Fe, Na	2,500 μg/mL	− 5% HNO₃/tr. HF		CL-INT-A3	
Ca	3,000 μg/mL				
Cl	20,000 μg/mL				



## Section 7

## Heavy Metals & Minerals Testing Kits



#### Heavy Metals & Minerals Testing Kits

#### For routinely analyzed Heavy Metals and Minerals

Heavy Metals and Minerals Testing Kits are designed for routinely analyzed heavy metals and minerals. All kits come with six, 30 mL standards which includes a nitric acid blank for easy dilution. Conveniently packaged in a sturdy, heavy-duty carton, these kits are perfect to store on a lab bench or in a cabinet. The 30 mL standards ship non-hazardous, saving money on shipping costs. The smaller volume also allows for less hazardous waste should the standard expire before its contents are used.

Heavy Metals Testing Kit					
Description	Concentration	Volume	Matrix	Part #	
Arsenic (CLAS2-2M)	1,000 μg/mL		2% HNO <sub>3</sub>		
Cadmium (CLCD2-2M)	1,000 μg/mL		2% HNO <sub>3</sub>		
Chromium (CLCR2-2M)	1,000 μg/mL		2% HNO <sub>3</sub>	SPXHM-KIT	
Lead (CLPB2-2M)	1,000 μg/mL	- 30 mL each	2% HNO <sub>3</sub>		
Mercury (CLHG4-2M)	1,000 μg/mL		10% HNO₃		
Nitric Acid Blank (CLBLK-HNO3M)	-		2% HNO <sub>3</sub>		

Minerals Testing Kit					
Description	Concentration	Volume	Matrix	Part #	
Calcium (CLCA2-2M)	1,000 μg/mL		2% HNO <sub>3</sub>		
Iron (CLFE2-2M)	1,000 μg/mL		2% HNO <sub>3</sub>		
Magnesium (CLMG2-2M)	1,000 μg/mL		2% HNO <sub>3</sub>		
Potassium (CLK2-2M)	1,000 μg/mL	- 30 mL each	2% HNO <sub>3</sub>	SPXMT-KIT	
Sodium (CLNA2-2M)	1,000 μg/mL		2% HNO <sub>3</sub>		
Nitric Acid Blank (CLBLK-HNO3M)	-		2% HNO <sub>3</sub>		

#### **Did You Know?**

Spex CertiPrep is proud to announce the installation of over 335 Solar Panels on the roof of our Metuchen, NJ headquarters. This system produces 85 kW of electricity, removing our reliance on power from fossil fuels and other sources. We are committed to helping keep our planet green, and this is just our latest green initiative. For more information, visit **spex.com**.




## Ion Chromatography & Ion Selective Electrode Standards



#### Single and Multi-Element Standards for Ion Chromatography

Ion chromatography (IC) is an analytical process for the separation of ions based on charge affinity. IC can be used for a variety of different kinds of charged analytes from single elements to large proteins. In order to ensure accurate analysis, quality standards which are traceable and stable are necessary. Spex CertiPrep offers the highest quality IC standards available for the analytical laboratory.

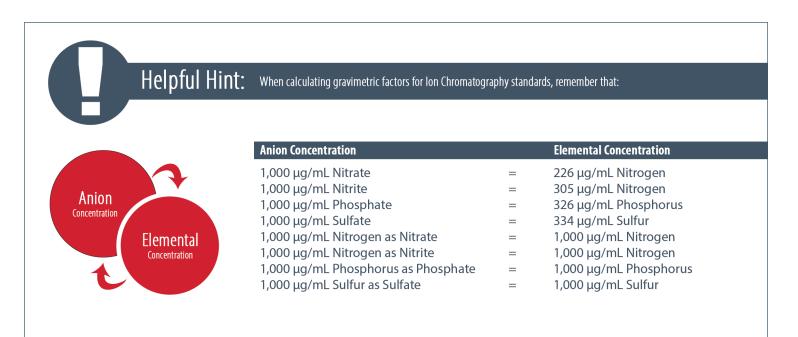

#### Take a Closer Look

Specifications of four types of ASTM Water

ASTM Type	I.	II	ш	IV
Total Matter (µg/mL)	< 0.1	0.1	1	2
Specific Resistance (megaohm/cm) (max)	18	1	4	0.2
рН	N/A	N/A	N/A	N/A
Color Retention Time of KMnO <sub>4</sub> (min)	60	60	10	10
Total Silica (μg/L) (max)	3	3	500	High
Total Organic Carbon (μg/L) (max)	50	50	200	N/A

### Ion Chromatography & Ion Selective Electrode Standards



		Element Ion Anion Stan		
Anions	Concentration	Volume	Matrix	Part #
Acetate $(C_2H_3O_2)^2$	1,000 μg/mL	125 mL	H <sub>2</sub> O	AS-ACE9-2Y
(-2 J-2)	////iss	500 mL	2	AS-ACE9-2X
Bromate (BrO₃) <sup>-</sup>	1,000 µg/mL	125 mL	H <sub>2</sub> O	AS-BRO39-2Y
	.,	500 mL		AS-BRO39-2X
Bromide (Br-)	1,000 µg/mL	125 mL	H <sub>2</sub> O	AS-BR9-2Y
bronnike (br )	.,	500 mL		AS-BR9-2X
Chlorate (ClO₃) <sup>-</sup>	1,000 μg/mL	125 mL	H <sub>2</sub> O	AS-CLO39-2Y
chiorate (cro <sub>3</sub> )	1,000 µg/mL	500 mL	1120	AS-CLO39-2X
	100 µg/mL	125 mL		AS-CL9-1Y
Chloride (Cl) <sup>-</sup>	100 µg/mL	500 mL	H <sub>2</sub> O	AS-CL9-1X
chionae (ci)	1,000 μg/mL	125 mL	1120	AS-CL9-2Y
	1,000 µg/mL	500 mL		AS-CL9-2X
Chlorita (CIO.)-	1,000,000/001	125 mL	но	AS-CLO29-2Y
Chlorite (ClO <sub>2</sub> ) <sup>-</sup>	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-CLO29-2X
Chromate (CrO₄) <sup>-2</sup>	1 000	125 mL		AS-CRO49-2Y
Chromate (CrO <sub>4</sub> ) <sup>2</sup>	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-CRO49-2X
	100 / 1	125 mL		AS-F9-1Y
	100 µg/mL	500 mL		AS-F9-1X
Fluoride (F) <sup>-</sup>	1,000 μg/mL	125 mL	H <sub>2</sub> O	AS-F9-2Y
		500 mL		AS-F9-2X
	1,000 µg/mL	125 mL		AS-HCO29-2Y
Formate (HCO <sub>2</sub> ) <sup>-</sup>		500 mL	H <sub>2</sub> O	AS-HCO29-2X
	1,000 μg/mL	125 mL	H <sub>2</sub> O	AS-19-2Y
lodide (I) <sup>-</sup>		500 mL		AS-19-2X
		125 mL	H <sub>2</sub> O	AS-NO39-2Y
Nitrate (NO <sub>3</sub> ) <sup>-</sup>	1,000 μg/mL	500 mL		AS-NO39-2X
		125 mL		AS-NO3N9-2Y
Nitrate-Nitrogen	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-NO3N9-2X
		125 mL		AS-NO29-2Y
Nitrite (NO <sub>2</sub> ) <sup>-</sup>	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-NO29-2X
		125 mL		AS-NO2N9-2Y
Nitrite-Nitrogen	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-NO2N9-2X
Ammonia Nitrogen	1,000 µg/mL	125 mL	H <sub>2</sub> O	AS-NH3N9-2Y
, and the open	1,000 µg/mL	125 mL	1120	AS-C2O49-2Y
Oxalate $(C_2O_4)^{-2}$	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-C2O49-2X
Perchlorate (ClO <sub>4</sub> ) <sup>-</sup>	1,000 μg/mL	125 mL	H <sub>2</sub> O	AS-CLO49-2Y
	1,000 µg/IIIL	125 mL	1120	AS-PO49-21
Phosphate (PO <sub>4</sub> ) <sup>-3</sup>	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-PO49-21 AS-PO49-2X
		125 mL		AS-PO49-2X AS-PO4P9-2Y
Phosphate-Phosphorus	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-PO4P9-21 AS-PO4P9-2X
		125 mL		AS-P04P9-2X AS-S049-2Y
Sulfate (SO <sub>4</sub> ) <sup>-2</sup>	1,000 μg/mL	500 mL	H <sub>2</sub> O	
				AS-SO49-2X
Sulfate-Sulfur	1,000 μg/mL	125 mL	H <sub>2</sub> O	AS-SO4S9-2Y
		500 mL		AS-SO4S9-2X



Single-Element Ion Cation Standards					
Cations	Concentration	Volume	Matrix	Part #	
Ammonium (NH <sub>4</sub> +)	1,000 μg/mL	125 mL	H <sub>2</sub> O	CS-NH49-2Y	
Calcium (Ca <sup>2+</sup> )	1,000 μg/mL	125 mL	0.2% HNO <sub>3</sub>	CS-CA2-2Y	
Lithium (Li+)	1,000 μg/mL	125 mL	0.2% HNO <sub>3</sub>	CS-LI2-2Y	
Magnesium (Mg <sup>2+</sup> )	1,000 μg/mL	125 mL	0.2% HNO <sub>3</sub>	CS-MG2-2Y	
Potassium (K <sup>+</sup> )	1,000 μg/mL	125 mL	0.2% HNO <sub>3</sub>	CS-K2-2Y	
Sodium (Na <sup>+</sup> )	1,000 μg/mL	125 mL	0.2% HNO <sub>3</sub>	CS-NA2-2Y	

Single-Element Ion Selective Electrode Standards				
Ion Selective Electrodes	Concentration	Volume	Matrix	Part #
	1,000 μg/mL	125 mL		AS-BR9-2Y
Due un i die (Due)	1,000 μg/mL	500 mL		AS-BR9-2X
Bromide (Br <sup>-</sup> )	0.1 M	125 mL	H <sub>2</sub> O	AS-BR9-5Y
	0.1 M	500 mL		AS-BR9-5X
	100 µg/mL	125 mL		AS-CL9-1Y
	100 μg/mL	500 mL		AS-CL9-1X
Chlorida (Cl <sup>-</sup> )	1,000 μg/mL	125 mL		AS-CL9-2Y
Chloride (Cl <sup>-</sup> )	1,000 μg/mL	500 mL	H <sub>2</sub> O	AS-CL9-2X
	0.1 M	125 mL		AS-CL9-5Y
	0.1 M	500 mL		AS-CL9-5X
	10 μg/mL	125 mL		AS-F9-1AY
	10 µg/mL	500 mL		AS-F9-1AX
	100 µg/mL	125 mL		AS-F9-1Y
Flueride (F-)	100 µg/mL	500 mL		AS-F9-1X
Fluoride (F <sup>-</sup> )	1,000 μg/mL	125 mL	− H₂O	AS-F9-2Y
	1,000 μg/mL	500 mL		AS-F9-2X
	0.1 M	125 mL		AS-F9-5Y
	0.1 M	500 mL		AS-F9-5X
	1,000 μg/mL	125 mL	20/ 1/011	RSCN9-2Y
Cyanide (CN <sup>-</sup> )	1,000 μg/mL	500 mL	2% KOH	RSCN9-2X

Ionic Strength Adjustment Buffers				
Buffers Concentration Volume Matrix Part #				
5M Sodium Nitrate (NaNO₃) Buffer	5 M	500 mL	H <sub>2</sub> O	IS-BUF1-500
10M Sodium Hydroxide (NaOH) Buffer	10 M	500 mL	H <sub>2</sub> O	IS-BUF2-500
Low Level TISAB II Buffer	-	500 mL	H <sub>2</sub> O	IS-BUF3-500



#### **Multi-Element Ion Anion Standards**

IC Instrument Check Standard 1				
Elements	Concentration	Volume	Matrix	Part #
F <sup>*</sup>	20 μg/mL			
CL <sup>.</sup>	30 μg/mL	125 mL	ЦО	ICMIX1-100
NO <sub>3</sub> -	100 μg/mL	125 ML	H <sub>2</sub> O	ICIVITAT-TUU
HPO <sub>4</sub> - <sup>2</sup> , SO <sub>4</sub> - <sup>2</sup>	150 μg/mL			

IC Instrument Check Standard 2				
Elements	Concentration	Volume	Matrix	Part #
F-	100 µg/mL			
CI-	200 µg/mL	125 ml		
Br-, NO <sub>3</sub> -, SO <sub>4</sub> - <sup>2</sup>	400 μg/mL	– 125 mL	H <sub>2</sub> O	ICMIX2-100
HPO4-2	600 µg/mL			

	IC Instrument Check Standard 6				
Elements	Concentration	Volume	Matrix	Part #	
F <sup>-</sup>	20 µg/mL				
$NO_3^-$ as N, $NO_2^-$ as N	25 μg/mL				
Cl-	50 µg/mL	125 mL	H <sub>2</sub> O	ICMIX6-100	
Br	100 μg/mL				
HPO <sub>4</sub> - <sup>2</sup> , SO <sub>4</sub> - <sup>2</sup>	150 μg/mL				

#### **Multi-Element Ion Cation Standards**

	IC Instrument Check Standard 3				
Elements	Concentration	Volume	Matrix	Part #	
Li+	50 μg/mL				
K <sup>+</sup> , Mg <sup>+2</sup> , NA <sup>+</sup>	200 μg/mL	125 mL	20/ 11010	ICMIN2 100	
NH₄ <sup>+</sup>	400 μg/mL		2% HNO <sub>3</sub>	ICMIX3-100	
Ca <sup>+2</sup>	1,000 μg/mL				

IC Instrument Check Standard 4				
Elements	Concentration	Volume	Matrix	Part #
Li+	10 μg/mL			
Na <sup>+</sup>	50 μg/mL	125 mL	0.5% HNO <sub>3</sub>	ICMIX4-100
K+, NH₄+	100 μg/mL			

	IC Instrument Check Standard 5				
Elements	Concentration	Volume	Matrix	Part #	
Mg <sup>2+</sup>	200 μg/mL				
Ca <sup>2+</sup>	400 μg/mL	105 ml			
Sr <sup>2+</sup>	600 μg/mL	– 125 mL	2% HNO₃	ICMIX5-100	
Ba <sup>2+</sup>	1,600 μg/mL				



#### Eluents

Eluents are made from high purity salts and filtered ASTM Type I Water. All eluents are at 100-fold concentration and ready for dilution, as needed, with filtered ASTM Type I Water.

	Multi-Element Ion Standards - Eluents				
Description	Concentration	Volume	Matrix	Part #	
0.5  M Sodium Carbonate (Na <sub>2</sub> CO <sub>3</sub> ) Eluent Concentrate	0.5 M	125 mL	H <sub>2</sub> O	IC-ELCON1-100	
0.5 M Sodium Bicarbonate (NaHCO₃) Eluent Concentrate	0.5 M	125 mL	H <sub>2</sub> O	IC-ELCON2-100	
0.18 M Sodium Carbonate (Na <sub>2</sub> CO <sub>3</sub> )	0.18 M	125 mL	H <sub>2</sub> O	IC-ELCON3-100	
0.17 M NaHCO₃ Sodium Bicarbonate Concentrate	0.17 M	125 IIIL	Π <sub>2</sub> Ο	IC-ELCONS-100	
ASTM Type I Water, 18 Megaohm	-	500 mL	H <sub>2</sub> O	PLBLK-H2O	
ASTM Type I Water, 18 Megaohm	-	1 L	H <sub>2</sub> O	PLBLK-H2O-1L	
ASTM Type I Water, 18 Megaohm	-	2 L	H <sub>2</sub> O	PLBLK-H2O-2L	
ASTM Type I Water, 18 Megaohm	-	4 L	H <sub>2</sub> O	PLBLK-H2O-4L	

Set of 3 Solutions for Bromide				
Contents	Part #			
AS-BR9-5Y				
AS-BR9-2Y	AS-BR9-SET			
IS-BUF1-500				

Set of 2 Solutions for Cyanide				
Contents	Part #			
RSCN9-2Y	RSCN9-SET			
IS-BUF2-500	ROCING-SET			

Set of 5 Solutions for Fluoride			
Contents	Part #		
AS-F9-5Y			
AS-F9-1AY			
AS-F9-1Y	AS-F9-SET		
AS-F9-2Y			
IS-BUF3-500			

#### **Certified Wet Assay**

Cyanide Reference Standard in a simple form designed for US EPA Methods 335.2 and 335.3, ASTM Method D2036-19, and Standard Method 4500-CNF, and in a complex form for use with US EPA Method 335.1.

	Cyanide Certified Reference Standards						
Description	Description Element Concentration Volume Matrix Part #						
Cyanide, Simple	CN⁻	1,000 μg/mL	125 mL	2% KOH	RSCN9-2Y		
Cyanide, Simple	CN⁻	1,000 μg/mL	500 mL	2% KOH	RSCN9-2X		
Cyanide, Complex	CN⁻	1,000 μg/mL	500 mL	2% KOH	RSCN9C-2X		



# section 9

## Carbon Black Reagents for ASTM D1510



#### **Carbon Black Reagents for ASTM D1510**

Our sodium thiosulfate solutions are prepared from ACS Grade, micro-crystalline Na<sub>2</sub>S<sub>2</sub>O<sub>3</sub>. In order to maximize shelf life, our matrix is prepared using double-deionized, ASTM Type I Water.

Our iodine solutions are prepared from ACS Grade potassium iodide and crystalline elemental iodine. To guarantee a clean and stable product, our matrix is prepared using double-deionized, ASTM Type I Water.

All solutions are prepared gravimetrically using high accuracy analytical balances to ensure precise target concentrations. Each batch is thoroughly homogenized using a high speed industrial mixer to ensure reliable results from the first bottle to the last.

We are titrating our samples on our automated titrator. The automated dosing drive uses 10,000 steps over a 20 mL volume, so its dosing increment *can be* as small as 2  $\mu$ L. For these applications, we are using a minimum dose of 10  $\mu$ L for the sodium thiosulfate endpoint and 4  $\mu$ L for the iodine endpoint. These settings achieve the extremely precise measurements for each titration while also staying within the parameters of the dosing unit.

As stated on our Certificate of Analysis, the sodium thiosulfate is run against a 0.1 N potassium dichromate solution. The exact normality of this solution is calculated by comparing it to NIST potassium dichromate. A set of 6 samples are run that must all be within the nominal value of 0.0394 N  $\pm$  0.00008 N.

The certified sodium thiosulfate is then used to titrate iodine. A set of 3 samples are run that must all be within the nominal value of 0.0473 N  $\pm$  0.00003 N.

Before releasing either of these reagents for packaging, we run QC checks with a previous lot to ensure accuracy over time.

Carbon Black Reagents				
Description	Packaging	Volume	Matrix	Part #
0.0394 N Sodium Thiosulfate	Cubitainer	1 Gallon	H <sub>2</sub> O/0.5% Amyl Alcohol	182002
0.0473 N lodine	Amber Glass Bottle	1 Gallon	H <sub>2</sub> O	183134

#### Want to try a Free Sample?

Contact **spexsales@antylia.com** or 732.549.7144 today to request a free sample for method validation.





The new guidelines set by the United States Pharmacopeia (USP) and the International Conference on Harmonization (ICH) have pushed the pharmaceutical and nutraceutical industries to provide accurate, quantifiable results for metal analysis in drugs, pharmaceutical substances and raw materials.

USP <232> outlines new limits in pharmaceutical products for arsenic, cadmium, lead, and mercury. The procedures focus on the use of ICP-MS for the analysis of low level impurities. ICP-MS instrumentation, along with accurate ICP-MS standards, allow for increased efficiency and accuracy of the analysis necessary to comply with the new regulations. In addition to the changes enacted by the USP.

Developed in accordance with USP <232> Elemental Impurities, Spex CertiPrep offers these additions to our Consumer Safety Compliance Standards line. These standards can be used as a calibration or check standard to verify Oral Daily Dose PDE, Parenteral Component Limit or Parenteral Daily Dose PDE as well as Inhalation Component Limit or Daily Dose. Our extensive experience in creating quality trace metal standards, coupled with your ICP-MS analysis, will ensure your company will remain compliant with the new and changing regulations.

#### USP <232> and <233> Elemental Impurities

	USP 232 Revision 40, Oral 2A				
Elements	Concentration	Volume	Matrix	Part #	
Со	50 mg/kg				
V	100 mg/kg	125 mL	2% HNO <sub>3</sub>	USP-ORAL2A	
Ni	200 mg/kg				

USP 232 Revision 40, Oral 2B Mix 1				
Elements	Concentration	Volume	Matrix	Part #
TI	8 mg/kg			
Ag	150 mg/kg	125 mL	2% HNO <sub>3</sub>	USP-ORAL2B-1
Se	150 mg/kg			

USP 232 Revision 40, Oral 2B Mix 2				
Elements	Concentration	Volume	Matrix	Part #
Au, Ir, Os, Pd, Pt, Rh, Ru	100 mg/kg for each component	125 mL	15% HCI	USP-ORAL2B-2

USP 232 Revision 40, Oral 3 Mix 1				
Elements	Concentration	Volume	Matrix	Part #
Li	550 mg/kg			
Ва	1,400 mg/kg	125 mL	100/ 11010	
Cu	3,000 mg/kg		10% HNO <sub>3</sub>	USP-ORAL3-1
Cr	11,000 mg/kg			

USP 232 Revision 40, Oral 3 Mix 2					
Element	Concentration	Volume	Matrix	Part #	
Sb	1,200 mg/kg				
Мо	3,000 mg/kg	125 mL	5% HNO₃/tr. Tartaric Acid/tr. HF	USP-ORAL3-2	
Sn	6,000 mg/kg				



#### USP <232> and <233> Elemental Impurities (continued)

USP 232 Revision 40, Parenteral 2A				
Element	Concentration	Volume	Matrix	Part #
Со	5 mg/kg			
V	10 mg/kg	125 mL	2% HNO <sub>3</sub>	USP-PARENT2A
Ni	20 mg/kg			

USP 232 Revision 40, Parenteral 2B Mix 1				
Element	Concentration	Volume	Matrix	Part #
TI	8 mg/kg			
Ag	10 mg/kg	125 mL	2% HNO <sub>3</sub>	USP-PARENT2B-1
Se	80 mg/kg			

USP 232 Revision 40, Parenteral 2B Mix 2					
Element	Concentration	Volume	Matrix	Part #	
lr	10 mg/kg				
Os	10 mg/kg				
Pd	10 mg/kg				
Pt	10 mg/kg	125 mL	10% HCl	USP-PARENT2B-2	
Rh	10 mg/kg				
Ru	10 mg/kg				
Au	100 mg/kg				

USP 232 Revision 40, Parenteral 3					
Element	Concentration	Volume	Matrix	Part #	
Sb	90 mg/kg				
Li	250 mg/kg				
Cu	300 mg/kg				
Sn	600 mg/kg	125 mL	5% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF	USP-PARENT3	
Ва	700 mg/kg				
Cr	1,100 mg/kg				
Мо	1,500 mg/kg				

USP 232 Revision 40, Inhalation Mix 1				
Elements	Concentration	Volume	Matrix	Part #
Hg	1 mg/kg			
As, Cd	2 mg/kg	125 mL	5% HNO <sub>3</sub>	USP-INHL1
Pb	5 mg/kg			



#### USP <232> and <233> Elemental Impurities (continued)

USP 232 Revision 40, Inhalation Mix 2A				
Elements	Concentration	Volume	Matrix	Part #
V	1 mg/kg			
Со	3 mg/kg	125 mL	2% HNO <sub>3</sub>	USP-INHL2A
Ni	5 mg/kg			

USP 232 Revision 40, Inhalation 2B, Mix 1				
Elements	Concentration	Volume	Matrix	Part #
Ag	7 mg/kg			
TI	8 mg/kg	125 mL	2% HNO <sub>3</sub>	USP-INHL2B-1
Se	130 mg/kg			

USP 232 Revision 40, Inhalation 2B, Mix 2					
Elements	Concentration	Volume	Matrix	Part #	
Gold					
Iridium					
Osmium					
Palladium	1 mg/kg for each component	125 mL	5% HCI	USP-INHL2B-2	
Platinum					
Rhodium					
Ruthenium					

USP 232 Revision 40, Inhalation Mix 3					
Elements	Concentration	Volume	Matrix	Part #	
Cr	3 mg/kg				
Мо	10 mg/kg				
Sb	20 mg/kg				
Li	25 mg/kg	125 mL	2% HNO <sub>3</sub> /tr. Tartaric Acid/tr. HF	USP-INHL3	
Cu	30 mg/kg				
Sn	60 mg/kg				
Ва	300 mg/kg				

Oral Elemental Impurities A				
Elements	Concentration	Volume	Matrix	Part #
As	1.5 mg/kg			
Pb	5 mg/kg	125 mL		
Hg	15 mg/kg		5% HNO₃	USP-TXM2
Cd	25 mg/kg			

Oral Elemental Impurities A					
Elements	Concentration	Volume	Matrix	Part #	
Cd	5 mg/kg				
Pb	5 mg/kg	125 mL		USP-TXM2A	
As	15 mg/kg		5% HNO <sub>3</sub> /1% HCI	USP-TAMIZA	
Hg	30 mg/kg				



#### USP <232> and <233> Elemental Impurities (continued)

Oral Elemental Impurities A				
Elements	Concentration	Volume	Matrix	Part #
Cd	5 mg/kg			
Pb	5 mg/kg	125 ml		USP-TXM2A
As	15 mg/kg	125 mL	5% HNO <sub>3</sub> /1% HCI	USP-I XMIZA
Hg	30 mg/kg			

Precious Metal impurities B (with Os)				
Elements	Concentration	Volume	Matrix	Part #
Ir, Os, Pd, Pt, Rh, Ru	100 mg/kg for each component	125 mL	15% HCI	USP-TXM3

Precious Metal impurities B (without Os)				
Elements	Concentration	Volume	Matrix	Part #
lr, Pd, Pt, Rh, Ru	100 mg/kg for each component	125 mL	15% HCl	USP-TXM4

Oral/Parenteral Elemental Impurities C				
Elements	Concentration	Volume	Matrix	Part #
Мо	100 mg/kg		5% HNO U	
V	100 mg/kg	125 ml		USP-TXM5
Ni	500 mg/kg	125 mL	5% HNO₃	USP-I XIVIS
Cu	1,000 mg/kg			

Oral Elemental Impurities C					
Elements	Concentration	Volume	Matrix	Part #	
V	100 mg/kg				
Ni	200 mg/kg				
Cu	3,000 mg/kg	125 mL	5% HNO <sub>3</sub>	USP-TXM5A	
Мо	3,000 mg/kg				
Cr	11,000 mg/kg				

Parenteral Elemental Impurities C					
Elements	Concentration	Volume	Matrix	Part #	
V	10 mg/kg				
Ni	20 mg/kg				
Cu	300 mg/kg	125 mL	5% HNO <sub>3</sub>	USP-TXM5B	
Cr	1,100 mg/kg				
Мо	1,500 mg/kg				

Parenteral Elemental Impurities D									
Elements Concentration Volume Matrix Part #									
Cd	2 mg/kg		5% HNO₃/1% HCI						
Hg	3 mg/kg	125 ml		USP-TXM6A					
Pb	5 mg/kg	- 125 mL		USP-I XIVIOA					
As	15 mg/kg								



#### ICH/Global Compliance Standards

Oral Elemental Impurities A								
Element         Concentration         Volume         Matrix         Part #								
As	1.5 mg/kg							
Pb	5 mg/kg	125 ml	5% HNO <sub>3</sub>					
Hg	15 mg/kg	- 125 mL		ICH-TXM2				
Cd	25 mg/kg							

Precious Metal Impurities B (with Os)							
Element	Matrix	Part #					
Ir, Os, Pd, Pt, Rh, Ru	100 mg/kg	125 mL	15% HCI	ICH-TXM3			

Precious Metal Impurities B (without Os)								
Element	Concentration	Volume	Matrix	Part #				
lr, Pd, Pt, Rh, Ru	100 mg/kg	125 mL	15% HCI	ICH-TXM4				

	Elemental Impurities E							
Element	Concentration	Volume	Matrix	Part #				
Co, Mo, V	100 mg/kg		59/ 1000					
Cr, Ni	250 mg/kg	125 ml						
Cu	1,000 mg/kg	125 mL	5% HNO <sub>3</sub>	ICH-TXM7				
Mn	2,500 mg/kg							

Elemental Impurities F							
Element	Element Concentration Volume Matrix						
Fe, Zn	13,000 mg/kg	125 mL	5% HNO₃	ICH-TXM8			

#### **Did You Know?**

We will guarantee your custom standards for one year from the date of shipment and supply your standard with a Comprehensive Certificate of Analysis. With our aqueous standards, you may choose between our conventional ICP certification, or request Claritas PPT<sup>®</sup> certifications, which includes an impurities analysis of up to 68 elements to ppt levels measured on ICP-MS.

To get started, contact our technical support team or visit **spex.com/CustomProduct/InorganicProduct** with the following information:

- Your specific application/instrumentation
- The elements or complexes you desire
- The concentration(s) at which you require each component
- The matrix which you prefer (e.g., water, dilute acid, oil, methanol, etc.)



## pH Buffers & Conductivity Standards

#### pH Buffers & Conductivity Standards



#### **Certified pH Buffers**

	Certified pH Buffers							
Description	Concentration	Matrix	Part #					
pH 2.00 Buffer	2 SI Units	H <sub>2</sub> O	PH-BUFF2-500					
pH 3.00 Buffer	3 SI Units	H <sub>2</sub> O	PH-BUFF3-500					
pH 4.00 Buffer	4 SI Units	H <sub>2</sub> O	PH-BUFF4-500					
pH 5.00 Buffer	5 SI Units	H <sub>2</sub> O	PH-BUFF5-500					
pH 6.00 Buffer	6 SI Units	H <sub>2</sub> O	PH-BUFF6-500					
pH 7.00 Buffer	7 SI Units	H <sub>2</sub> O	PH-BUFF7-500					
pH 8.00 Buffer	8 SI Units	H <sub>2</sub> O	PH-BUFF8-500					
pH 9.00 Buffer	9 SI Units	H <sub>2</sub> O	PH-BUFF9-500					
pH 10.00 Buffer	10 SI Units	H <sub>2</sub> O	PH-BUFF10-500					
pH 11.00 Buffer	11 SI Units	H <sub>2</sub> O	PH-BUFF11-500					
pH 12.00 Buffer	12 SI Units	H <sub>2</sub> O	PH-BUFF12-500					

#### **Conductivity Standards: TDS as KCL**

Conductivity Standards: TDS as KCL								
Description	Element	Concentration	Volume	Matrix	Part #			
100 µmhos/cm @ 25°C	65 μg/mL as KCL	100 µmhos	500 mL	H <sub>2</sub> O	TDS-1-500			
1,000 μmhos/cm @ 25°C	650 μg/mL as KCL	1,000 µmhos	500 mL	H <sub>2</sub> O	TDS-2-500			



\*\* This is for general informational purposes only. These are uncertified values and do not pertain to any specific lot of product. \*\*

		TEMPERATURE (°C)									
Part #	pH Buffer	0	5	10	15	20	25	30	35	40	50
PH-BUFF2-500	pH 2	1.97	1.98	1.98	2.02	2.00	2.00	2.00	2.02	2.01	2.02
PH-BUFF3-500	pH 3	2.97	2.98	2.97	3.00	3.00	3.00	3.02	3.03	3.03	3.06
PH-BUFF4-500	pH 4	4.01	3.99	4.00	4.00	4.00	4.00	4.01	4.02	4.03	4.06
PH-BUFF5-500	pH 5	5.05	5.04	5.03	5.00	5.00	5.00	5.01	5.01	5.04	5.07
PH-BUFF6-500	pH 6	6.07	6.05	6.06	6.05	6.00	6.00	5.99	5.98	5.97	5.96
PH-BUFF7-500	pH 7	7.13	7.10	7.07	7.05	7.02	7.00	6.99	6.98	6.97	6.83
PH-BUFF8-500	pH 8	8.15	8.13	8.08	8.01	8.00	8.00	8.00	7.95	7.94	7.93
PH-BUFF9-500	pH 9	9.17	9.13	9.09	9.06	9.02	9.00	8.97	8.93	8.91	8.87
PH-BUFF10-500	pH 10	10.34	10.26	10.19	10.12	10.06	10.00	9.94	9.90	9.85	9.77
PH-BUFF11-500	pH 11	11.80	11.69	11.46	11.31	11.17	11.00	10.88	10.76	10.62	10.37
PH-BUFF12-500	pH 12	12.02	12.03	12.04	12.01	12.00	12.00	12.02	12.02	12.06	12.10



## Organometallic Single & Multi-Element Oil Standards



#### **Organometallic Single & Multi-Element Oil Standards**

The determination of wear metals in engine oils and other lubricants can be applied to machines such as automobiles, aircraft, heavy equipment, trucks, locomotives, military vehicles, etc. The examples are endless.

By tracking metals suspended in the used oil, engineers, designers and mechanics can determine the breakdown of specific engine parts. Specific elements present in used oils have been found to be directly related to specific engine problems. Engine failures, as well as expensive repairs, can be avoided if engine oils are analyzed, providing a periodic trend to predict maintenance or replacement.

Spex CertiPrep presents a comprehensive offering of Organometallic Oil Standards. The benefits and advantages of these standards are many:

- Choice of over 35 single-elements at 1,000 or 5,000  $\mu g/g$
- Popular multi-element blends of 23, 21, 12, or 5 elements
- Clear, transparent matrix
- 1 year expiration date
- Convenient sizes: 50 or 100 grams
- Certificate of Analysis with every solution
- Guaranteed stable and accurate
- Manufactured under an internationally accredited ISO 9001 quality system and compliant with ISO/IEC 17025
- Custom standards available

#### Applications

- Wear metals
- Crude oils
- Additive metals
- Environmental monitoring
- Petrochemical testing
- Pharmaceuticals
- Food processing
- Sulfur in diesel fuel



#### Single-Element Organometallic Oil Standards

Each standard is supplied with a Certificate of Analysis and is packaged in a 50 gram bottle.

Single-Element Organometallic Oil Standards							
Elements in Base Oil	Concentration	Weight	Matrix	Part #			
Aluminum (Al)	1,000 µg/g	50 g	Base Oil 20	ORG-AL8-2Z			
	5,000 μg/g	50 g	Base Oil 75	ORG-AL8-4Z			
Antimony (Sb)	1,000 µg/g	50 g	Base Oil 20	ORG-SB8-2Z			
Arsenic (As)	1,000 µg/g	50 g	Base Oil 75	ORG-AS8-2Z			
Barium (Ba)	1,000 µg/g	50 g	Base Oil 75	ORG-BA8-2Z			
Dunum (Du)	5,000 μg/g	50 g	Base Oil 75	ORG-BA8-4Z			
Beryllium (Be)	1,000 µg/g	50 g	Base Oil 75	ORG-BE8-2Z			
Bismuth (Bi)	1,000 µg/g	50 g	Base Oil 75	ORG-BI8-2Z			
Boron (B)	1,000 µg/g	50 g	Base Oil 75	ORG-B8-2Z			
bolon (b)	5,000 μg/g	50 g	Base Oil 75	ORG-B8-4Z			
Cadmium (Cd)	1,000 µg/g	50 g	Base Oil 75	ORG-CD8-2Z			
Cadmium (Cd)	5,000 μg/g	50 g	Base Oil 75	ORG-CD8-4Z			
Calcium (Ca)	1,000 µg/g	50 g	Base Oil 75	ORG-CA8-2Z			
Calciulii (Ca)	5,000 μg/g	50 g	Base Oil 75	ORG-CA8-4Z			
Chromium (Cr)	1,000 µg/g	50 g	Base Oil 75	ORG-CR8-2Z			
Chromium (Cr)	5,000 µg/g	50 g	Base Oil 75	ORG-CR8-4Z			
Cabalt (Ca)	1,000 µg/g	50 g	Base Oil 75	ORG-CO8-2Z			
Cobalt (Co)	5,000 µg/g	50 g	Base Oil 75	ORG-CO8-4Z			
Company (Cor)	1,000 µg/g	50 g	Base Oil 75	ORG-CU8-2Z			
Copper (Cu)	5,000 µg/g	50 g	Base Oil 75	ORG-CU8-4Z			
	1,000 µg/g	50 g	Base Oil 75	ORG-FE8-2Z			
Iron (Fe)	5,000 µg/g	50 g	Base Oil 75	ORG-FE8-4Z			
Lassel (Dis)	1,000 µg/g	50 g	Base Oil 75	ORG-PB8-2Z			
Lead (Pb)	5,000 µg/g	50 g	Base Oil 75	ORG-PB8-4Z			
	1,000 µg/g	50 g	Base Oil 20	ORG-LI8-2Z			
Lithium (Li)	5,000 µg/g	50 g	Base Oil 75	ORG-LI8-4Z			
	1,000 µg/g	50 g	Base Oil 75	ORG-MG8-2Z			
Magnesium (Mg)	5,000 µg/g	50 g	Base Oil 75	ORG-MG8-4Z			
	1,000 µg/g	50 g	Base Oil 75	ORG-MN8-2Z			
Manganese (Mn)	5,000 µg/g	50 g	Base Oil 75	ORG-MN8-4Z			
Mercury (Hg)	1,000 µg/g	50 g	Base Oil 75	ORG-HG8-2Z			
	1,000 µg/g	50 g	Base Oil 75	ORG-MO8-2Z			
Molybdenum (Mo)	5,000 μg/g	50 g	Base Oil 75	ORG-MO8-4Z			
	1,000 µg/g	50 g	Base Oil 75	ORG-NI8-2Z			
Nickel (Ni)	5,000 µg/g	50 g	Base Oil 75	ORG-NI8-4Z			
	1,000 µg/g	50 g	Base Oil 75	ORG-P8-2Z			
Phosphorus (P)	5,000 μg/g	50 g	Base Oil 75	ORG-P8-4Z			
	1,000 µg/g	50 g	Base Oil 75	ORG-K8-2Z			
Potassium (K)	5,000 μg/g	50 g	Base Oil 75	ORG-K8-4Z			
Scandium (Sc)	1,000 µg/g	50 g	Base Oil 75	ORG-SC8-2Z			
Selenium (Se)	1,000 µg/g	50 g	Base Oil 75	ORG-SE8-2Z			



#### Single-Element Organometallic Oil Standards (continued)

Elements in Base Oil	Concentration	Weight	Matrix	Part #
Silicon (Si)	1,000 µg/g	50 g	Base Oil 20	ORG-SI8-2Z
Silver (Ag)	1,000 µg/g	50 g	Base Oil 75	ORG-AG8-2Z
Codium (No)	1,000 µg/g	50 g	Base Oil 20	ORG-NA8-2Z
Sodium (Na)	5,000 µg/g	50 g	Base Oil 75	ORG-NA8-4Z
Culture (C)	1,000 µg/g	50 g	Base Oil 75	ORG-S8-2Z
Sulfur (S)	5,000 μg/g	50 g	Base Oil 75	ORG-S8-4Z
Thallium (Tl)	1,000 µg/g	50 g	Base Oil 20	ORG-TL8-2Z
Tin (Cn)	1,000 µg/g	50 g	Base Oil 20	ORG-SN8-2Z
Tin (Sn)	5,000 μg/g	50 g	Base Oil 75	ORG-SN8-4Z
Titopium (Ti)	1,000 µg/g	50 g	Base Oil 20	ORG-TI8-2Z
Titanium (Ti)	5,000 μg/g	50 g	Base Oil 75	ORG-TI8-4Z
Vanadium ()()	1,000 µg/g	50 g	Base Oil 75	ORG-V8-2Z
Vanadium (V)	5,000 µg/g	50 g	Base Oil 75	ORG-V8-4Z
Yttrium (Y)	1,000 µg/g	50 g	Base Oil 75	ORG-Y8-A-2Z
7:n c (7n)	1,000 µg/g	50 g	Base Oil 20	ORG-ZN8-2Z
Zinc (Zn)	5,000 μg/g	50 g	Base Oil 75	ORG-ZN8-4Z
	1,000 µg/g	50 g	Base Oil 20	ORG-ZR8-2Z
Zirconium (Zr)	5,000 μg/g	50 g	Base Oil 75	ORG-ZR8-4Z

#### Multi-Element Organometallic Oil Standards

Multi-Element Organometallic Oil Standards, 23 Elements							
Elements in Base Oil	Concentration	Weight	Matrix	Part #			
	100 μg/g	50 g		S23-100Z			
	100 μg/g	100 g		S23-100Y			
	300 μg/g	50 g		S23-300Z			
Ag, Al, B, Ba, Ca, Cd, Cr, Cu, Fe,	300 μg/g	100 g	Base Oil 75	S23-300Y			
K, Mg, Mn, Mo, Na, Ni, P, Pb, Sb, Si, Sn, Ti, V, Zn	500 μg/g	50 g	Base OII 75	S23-500Z			
	500 μg/g	100 g		S23-500Y			
	900 μg/g	50 g		S23-900Z			
	900 μg/g	100 g		S23-900Y			

Multi-Element Organometallic Oil Standards, 21 Elements							
Elements in Base Oil	Concentration	Weight	Matrix	Part #			
	100 μg/g	50 g	Base Oil 75	S21-100Z			
	100 µg/g	100 g		S21-100Y			
	300 µg/g	50 g		S21-300Z			
Ag, Al, B, Ba, Ca, Cd, Cr, Cu, Fe,	300 µg/g	100 g		S21-300Y			
Mg, Mn, Mo, Na, Ni, P, Pb, Si, Sn, Ti, V, Zn	500 μg/g	50 g		S21-500Z			
	500 μg/g	100 g		S21-500Y			
	900 μg/g	50 g		S21-900Z			
	900 μg/g	100 g		S21-900Y			



#### Multi-Element Organometallic Oil Standards (continued)

Multi-Element Organometallic Oil Standards, 12 Elements							
Elements in Base Oil Concentration Weight Matrix Part #							
	100 μg/g	50 g	Base Oil 75	S12-100Z			
	100 μg/g	100 g		S12-100Y			
Ag, Al, Cr, Cu, Fe, Mg, Na, Ni, Pb, Si, Sn, Ti	500 μg/g	50 g		S12-500Z			
51, 511, 11	900 μg/g	50 g		S12-900Z			
	900 μg/g	100 g		S12-900Y			

Multi-Element Organometallic Oil Standards, 5 Elements						
Elements in Base Oil	Concentration	Weight	Matrix	Part #		
	900 μg/g	50 g		AM-900Z		
	900 μg/g	100 g	Page Oil 75	AM-900Y		
Pa Ca Ma D Za	1,000 µg/g	50 g		AM-1000Z		
Ba, Ca, Mg, P, Zn	1,000 µg/g	100 g	Base Oil 75	AM-1000Y		
	5,000 μg/g	50 g		AM-5000Z		
	5,000 µg/g	100 g		AM-5000Y		

#### **Base Oil and Kerosene Blanks**

Base Oil 20 and 75 are the same certified base oils that are used in our singles and multi-element blends.

Base Oil 20 Bl	ank, 500 mL	Base Oil 20 B	lank, 1 Gallon
Matrix	Part #	Matrix	Part #
Base Oil 20	BASE20	Base Oil 20	BASE20-G
Base Oil 75 Bl	ank, 500 mL	Base Oil 75 B	lank, 1 Gallon
Matrix	Part #	Matrix	Part #
Base Oil 75	BASE75	Base Oil 75	BASE75-G
Kerosene Bla	nk, 500 mL	Kerosene Bla	ank, 1 Gallon
Matrix	Part #	Matrix	Part #
Kerosene	KER-BLK	Kerosene	KER-BLK-G



#### **B100 Biodiesel Standards**

Governments worldwide have passed regulations that mandate lower levels of sulfur in biodiesel fuel. To comply with the implementation of these regulations, Spex CertiPrep offers specifically designed Certified Reference Materials for industrial use. Our B100 Biodiesel Standards meet the requirements for testing ASTM Methods D6751, D5453 and EN 14214.

	E	3100 Biodiesel Standard	ls	
Description	Concentration	Volume	Matrix	Part #
Certified Matrix Blank	N/A	100 mL	B100	BF-BLKY
Certified Matrix Blank	N/A	500 mL	B100	BF-BLKX
Sulfur	5 µg/g	100 mL	B100	BFS-5Y
Sulfur	10 µg/g	100 mL	B100	BFS-10Y
Sulfur	15 μg/g	100 mL	B100	BFS-15Y
Sulfur	20 µg/g	100 mL	B100	BFS-20Y
Sulfur	25 μg/g	100 mL	B100	BFS-25Y
Sulfur	50 μg/g	100 mL	B100	BFS-50Y
Sulfur	100 µg/g	100 mL	B100	BFS-100Y
Ca, K, Mg, Na, P	5 µg/g	100 mL	B100	BFM-5Y
Ca, K, Mg, Na, P	10 µg/g	100 mL	B100	BFM-10Y
Ca, K, Mg, Na, P	20 µg/g	100 mL	B100	BFM-20Y

#### Sulfur Oil Standards for Diesel Fuel Analysis in Base Oil

Description	Concentration	Volume	Matrix	Part #
Sulfur Blank	0 µg/g	100 mL	Base Oil 20	DSS8-Y
Sulfur	5 μg/g	100 mL	Base Oil 20	DSS8-5Y
Sulfur	10 µg/g	100 mL	Base Oil 20	DSS8-10Y
Sulfur	15 μg/g	100 mL	Base Oil 20	DSS8-15Y
Sulfur	20 µg/g	100 mL	Base Oil 20	DSS8-20Y
Sulfur	25 μg/g	100 mL	Base Oil 20	DSS8-25Y
Sulfur	50 μg/g	100 mL	Base Oil 20	DSS8-AY
Sulfur	75 μg/g	100 mL	Base Oil 20	DSS8-75Y
Sulfur	100 µg/g	100 mL	Base Oil 20	DSS8-1Y
Sulfur	200 µg/g	100 mL	Base Oil 20	DSS8-BY
Sulfur	300 µg/g	100 mL	Base Oil 20	DSS8-CY
Sulfur	500 μg/g	100 mL	Base Oil 20	DSS8-1AY
Sulfur	750 μg/g	100 mL	Base Oil 20	DSS8-1BY
Sulfur	1,000 µg/g	100 mL	Base Oil 20	DSS8-2Y



#### Sulfur Oil Standards for Diesel Fuel Analysis in Base Oil

Set for Sulfu	r Standards	Set for Ultra Low Sulfur Standards	
Contents	Part #	Contents	Part #
DSS8-1AY		SDFS-10-Y	
DSS8-1BY		SDFS-100-Y	
DSS8-1Y		SDFS-15-Y	
DSS8-2Y		SDFS-20-Y	
DSS8-AY	DSS8-SET	SDFS-25-Y	SDFS-SET
DSS8-BY		SDFS-5-Y	
DSS8-CY		SDFS-50-Y	
BASE20		SDFS-BLK-Y	

#### Sulfur Oil Standards for Diesel Fuel Analysis in #2 Diesel Fuel

Sulfur Oil Standards for Diesel Fuel Analysis in #2 Diesel Fuel					
Description	Concentration	Volume	Matrix	Part #	
Sulfur Blank	0 µg/g	100 mL	#2 Diesel Fuel	SDFS-BLK-Y	
Sulfur	5 µg/g	100 mL	#2 Diesel Fuel	SDFS-5-Y	
Sulfur	10 µg/g	100 mL	#2 Diesel Fuel	SDFS-10-Y	
Sulfur	15 μg/g	100 mL	#2 Diesel Fuel	SDFS-15-Y	
Sulfur	20 µg/g	100 mL	#2 Diesel Fuel	SDFS-20-Y	
Sulfur	25 μg/g	100 mL	#2 Diesel Fuel	SDFS-25-Y	
Sulfur	50 μg/g	100 mL	#2 Diesel Fuel	SDFS-50-Y	
Sulfur	75 μg/g	100 mL	#2 Diesel Fuel	SDFS-75-Y	
Sulfur	100 μg/g	100 mL	#2 Diesel Fuel	SDFS-100-Y	
Sulfur	200 μg/g	100 mL	#2 Diesel Fuel	SDFS-200-Y	
Sulfur	300 μg/g	100 mL	#2 Diesel Fuel	SDFS-300-Y	
Sulfur	400 μg/g	100 mL	#2 Diesel Fuel	SDFS-400-Y	
Sulfur	500 μg/g	100 mL	#2 Diesel Fuel	SDFS-500-Y	
Sulfur	750 μg/g	100 mL	#2 Diesel Fuel	SDFS-750-Y	
Sulfur	1,000 µg/g	100 mL	#2 Diesel Fuel	SDFS-1000-Y	

#### **Did You Know?**

Collectively our employees speak 15 different languages! Languages include: English, French, Russian, Spanish, Mandarin, Japanese, Portuguese, Hindi, Chinese, Sindhi, Hebrew, Gujarati, Indonesian, Punjabi, and German.



#### HCS PICTOGRAMS & HAZARDS

As of June 1, 2015, OSHA's Hazard Communication Standard (HCS) will require pictograms on labels to alert users of the chemical hazards to which they may be exposed. The HCS is designed to meet the requirements of the Globally Harmonized System (GHS).





## Fusion Fluxes & Additives



#### Fusion Fluxes & Additives for XRF, ICP and AA

Fusion is a technique used to prepare Inorganic samples, with a view to analyze them by X-Ray Fluorescence (XRF), Inductively Coupled Plasma (ICP), Atomic Absorption (AA), or any traditional wet chemistry method. Typical samples include: cements, ores, slag, sediments, soils, rocks, ceramics, pigments, glasses and even metals. A fusion can produce either a small, homogeneous glass disk (or "bead") for XRF, or an acid solution for other analytical methods. Fusion is an extremely effective method of preparation for oxides, sulfides, fluorides, ferroalloys, and other compounds for analysis by XRF, AA, ICP, DCP, etc. The samples are, if necessary, pulverized and mixed with a flux; this mixture is heated until the flux melts and the sample dissolves in it, yielding a clear, homogeneous melt. The melt can be cast as a glass disk for XRF or dissolved in dilute acids for analysis in solution form. In many cases, fusion fluxing is simpler and the analytical results more accurate than if the sample was prepared by conventional acid dissolution or pressed powder methods.

Spex CertiPrep has a line of pure and ultra-pure Fusion Fluxes and Additives. Both lines are of a high purity, with the ultra pure line having a purity of 99.998%. These fluxes are made from a "micro bead" formula that ensures the same ratio of components is in each bead with no harmful dust to clog your instruments. Our highly standardized manufacturing process produces identical batches with no appreciable lot-to-lot variations, thus maintaining a high level of consistency and quality.

#### **Features of our Fluxes:**

- **Homogeneity** Each flux has the same composition throughout. If a flux is not homogeneous, segregation will affect the XRF intensities.
- **Purity** With pure fluxes, no element impurity exceeds 10 µg/mL. With ultra pure fusion flux, impurities are practically non-existent.
- **High Density** Our fluxes have a density of 1.4 as compared to 0.3 for fine fluxes. High density flux is easier to handle, measure and, with certain applications, smaller, less expensive platinum ware can be used.
- Not Hydroscopic All of our fluxes have a water content of < 0.05%. The major disadvantage of absorbed water is a loss of accuracy, in the analytical result. This is due to an error in the sample/flux ratio; additionally, the volatilization of water can sometimes occur suddenly, blowing a fraction of the flux sample out of the crucible.
- **Granularity** All of our fluxes have a granularity greater than 500 µm which means that they contain no dust. Due to electrostatic forces, dusty flux sticks to the weighing pan, the funnel, and the crucible wall, resulting in a loss of flux and the formation of glass droplets on the wall of the crucible.
- **Outstanding Fluidity** Granular flux will not stick to surfaces and will leave the crucible wall clean after fusion.

Spex SamplePrep offers two approaches to fusion fluxing: the Spex SamplePrep Automated Fluxer for rapid, repetitive fusions, and graphite crucibles for smaller scale operation.

#### Spex SamplePrep Graphite Crucibles

Spex SamplePrep graphite crucibles are a cost effective alternative to metal (platinum/gold) crucibles used to contain samples during fusion. Graphite crucibles are disposable, eliminating both the need for time consuming cleaning and the possibility for sample cross contamination. Chemically inert and heat resistant, graphite will not combine with samples during fusion.

#### Fusion Fluxes & Additives



Pure Fusion Fluxes					
Description	Weight	Part #			
Lithium Metaborate (100%)	1 kg	FFB-0000-02			
Lithium Tetraborate (100%)]	1 kg	FFB-1000-02			
Lithium Tetraborate (99.5%)   Lithium Bromide (0.50%)	1 kg	FFB-1005-02			
Lithium Tetraborate (67%)   Lithium Metaborate (33%)	1 kg	FFB-6700-02			
Lithium Tetraborate (65.75%)   Lithium Metaborate (33.75%)   Lithium Bromide (0.50%)	1 kg	FFB-6705-02			
Lithium Tetraborate (50%)   Lithium Metaborate (50%)	1 kg	FFB-5000-02			
Lithium Tetraborate (49.75%)   Lithium Metaborate (49.75%)   Lithium Bromide (0.50%)	1 kg	FFB-5005-02			
Lithium Tetraborate (49.75%)   Lithium Metaborate (49.75%)   Lithium Iodide (0.50%)	1 kg	FFB-5007-02			
Lithium Tetraborate (49.50%)   Lithium Metaborate (49.50)  Lithium Bromide (1.00%)	1 kg	FFB-5010-02			
Lithium Tetraborate (34.83%)   Lithium Metaborate (64.67%)   Lithium Bromide (0.50%)	1 kg	FFB-3505-02			

Ultra Pure Fusion Fluxes					
Description	Weight	Part #			
Lithium Metaborate (100%)	1 kg	FFB-0000-03			
Lithium Metaborate (99.5%)   Lithium Bromide (0.50%)	1 kg	FFB-0005-03			
Lithium Metaborate (98.50%)   Lithium Bromide (1.50%)	1 kg	FFB-0007-03			
Lithium Tetraborate (100%)]	1 kg	FFB-1000-03			
Lithium Tetraborate (99.5%)   Lithium Bromide (0.50%)	1 kg	FFB-1005-03			
Lithium Tetraborate (99.5%)   lithium Iodide (0.50%)	1 kg	FFB-1007-03			
Lithium Tetraborate (50%)   Lithium Metaborate (50%)	1 kg	FFB-5000-03			
Lithium Tetraborate (49.75%)   Lithium Metaborate (49.75%)   Lithium Bromide (0.50%)	1 kg	FFB-5005-03			
Lithium Tetraborate (49.75%)   Lithium Metaborate (49.75%)   Lithium Iodide (0.50%)	1 kg	FFB-5007-03			
Lithium Tetraborate (35%)   Lithium Metaborate (65%)	1 kg	FFB-3500-03			

Ultra Pure Additives*						
Description Package Size Par						
Lithium Bromide Crystals	125 g	FFB-100-03				
Lithium Bromide Solution	15 mL	FFB-103-03				
Lithium Bromide Solution (10 pack)	10 x 15mL	FFB-105-03				
Lithium Carbonate	1 kg	FFB-401-03				
Lithium lodide Crystals	125 g	FFB-110-03				
Lithium lodide Solution (10 pack)	10 x 15 mL	FFB-115-03				
Lithium Nitrate Crystals	250 g	FFB-300-03				

\* Additives do not come with Certificate of Analysis.





## Laboratory Products & Contamination Control



#### **Laboratory Products & Contamination Control**

We are the industry leader for over 60 years in the Certified Reference Materials (CRM) marketplace, we continue to meet the needs of laboratories worldwide with innovation and research.

Our contamination control products are designed and Made by Chemists for Chemists<sup>®</sup> in response to the need for cost effective, easy-to-use equipment, and high purity matrix/wash blanks for the clean laboratory environment.

New, sophisticated instruments which can detect contaminants at parts per trillion (ppt) levels have necessitated the need for eliminating contaminants right at the source. Our dedicated chemists have designed, tested, and approved these products for your use.

#### Do you know where contamination can come from?

- Powder in latex gloves used frequently in labs contain high levels of zinc.
- Yellow stoppers used for sealing volumetric flasks contain high levels of cadmium.
- Dental work containing mercury amalgam fillings can contaminate samples that are directly exposed to exhalation.
- Calamine lotion is pure zinc oxide.
- Hair dyes contain lead acetate.
- Eye makeup contains mercury as a preservative.

Visit **spex.com** to download slides and see a recording of our "Clean Laboratory Techniques" presentation.



	Pipette Washer/Dryer and Optional Accessories						
Description	Specifications	Volts	Hz	Amps	Part #		
Pipette Washer/Dryer	3 ft. tall x 1 ft. wide x 1 ft. deep	-	-	-	PIPWASH-1		
Pipette Washer Pump	Capacity: 205 Gal/Hr	115 V	60 Hz	1.1 Amps	PIPPUMP-115V		
Pipette Washer Pump	Capacity: 205 Gal/Hr	230 V	60 Hz	1.1 Amps	PIPPUMP-230V		
Pipette Washer Basin	-	-	-	-	PIPBASIN-1		

#### To dry the insides of the pipettes, the line is connected to a vacuum source and air is pulled in through the pipette tips until the inside of all of the pipettes are dry.

One major source of contamination is the volumetric pipette. At Spex CertiPrep, our chemists realized that they were spending valuable time manually washing and rinsing pipettes. Conventional washers were expensive and too large to comfortably fit in our laboratory. Our chemists designed a device that could be hooked up to a water line to allow the flow of water or other liquid through the inside and over the outside of the pipettes. As a result, our chemists spent less time cleaning pipettes, and more time manufacturing Spex CertiPrep Certified

The pipette washer/dryer is easy to use. Simply insert up to 23 pipettes at a time, close the door and attach the tubing to the wash or rinse line. The washer can also be used with the washer basin and pump to circulate wash or rinse solution through the pipettes. The solution shoots out of the pipette tip, reflects off the ceiling portion of the washer and rains a shower down over

#### **Product Features:**

• Lightweight and compact, the washer/dryer fits within a sink or on a lab bench.

the outside of the pipettes; thus cleaning both the inside and outside of the pipettes.

- Durable polyethylene construction.
- Convenient, independent on/off valves control flow to the front and back rows of washers and the main water supply.
- Transparent door closes to prevent splashing when washer is in use.

Reference Materials (CRMs); used and trusted by labs all over the world.

- 23 cone-shaped, plastic pipette holders accommodate pipettes 0.5-250 mL in size.
- Optional pump and basin available separately.

Technical service available 7:30 AM - 5:30 PM EST. Speak directly with the chemists who developed the washer/dryer.

Demo units available. Please contact us at +1.732.549.7144 or 1.800.LAB.SPEX or via email at

spexsales@antylia.com for information and availability.



Pipette Washer/Dryer (Patented)





#### **MiniG**<sup>®</sup>

The 1600 MiniG<sup>®</sup> is the ideal solution for the labs that want a compact yet powerful tool for QuEChERS sample preparation. The clamp holds up to six 50 mL vials and the vigorous vertical movement is both consistent for every vial and results in improved extraction from samples.

#### Specifications:

- Safety interlock prevents unit from operating when lid is open. Window allows analyst to view samples during operation.
- Vertical clamp movement ensures thorough extraction. Adjustable clamp holds 6 x 50 mL vials, 24 x 15 mL vials or up to 48 x 2 mL vials.
- Digital timer display with adjustable operating time.
- Compact, powerful motor agitates samples from 500 1500 rpm.

MiniG®	
Description	Part #
MiniG - Shaker and Tissue Homogenizer	1600
Ceramic Grinding Media - 5/32 in. x 5/16 in.	CP2185
Ceramic Grinding Media 3/8 in. x 7/8 in.	CP2183
Ceramic Grinding Media - 5/16 in. x 5/8 in.	CP2184

